






0° (▨=NO)					
TER	ANG.	(20°)	(15°)	(15°)	(20°)
①		▨			
②					▨
③		▨	▨	▨	▨

CCW ← → CW


CODE TABLE



- Typical Specifications
- 1. Rating : DC 0.1A 12V
 - 2.Operating Force:
 - lever portion 2-80±50gf
 - Push portion 250±50gf
 - 3.Mechanical life: 1,0000 cycles
 - 4.Operation Stroke: 0.8±0.2mm

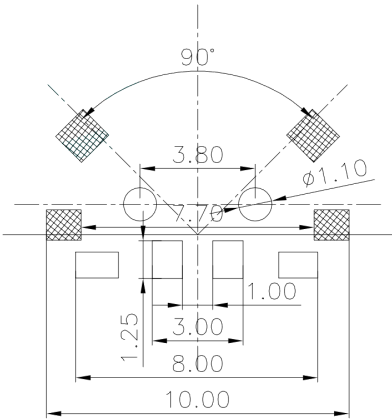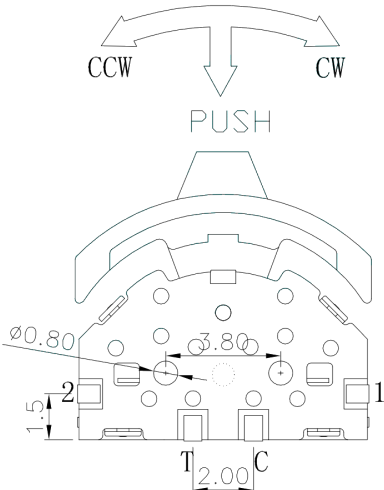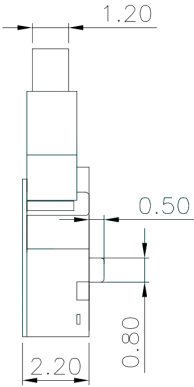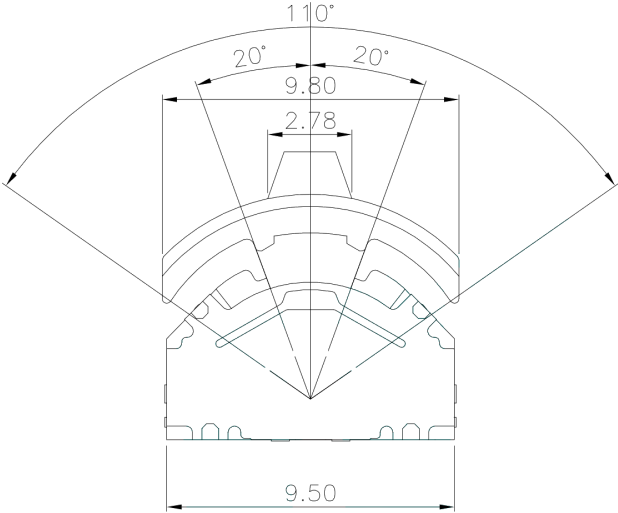

P.C.B Mounting Pattern Dimension

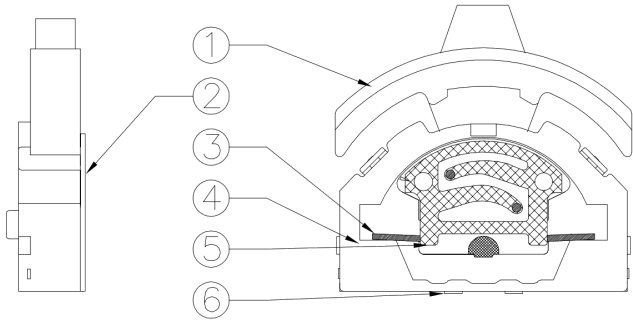

⑥	Contact	—	1	F.Ag/Brass	—	—
⑤	Terminal	—	4	Brass(0.15t)	Plating silver	—
④	Base	—	1	Nylon	Black	—
③	Spring	—	1	SUS	—	—
②	Cover	—	1	SUS	White	—
①	Keystoke	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 东莞市溪榜电子有限公司		
DRAWN		J.X.Zhang	2018/8/1		DONG GUAN XI BANG ELECTRONICS CO., LTD.		
CHECKED					TITLE: MULTIFUNCTIONAL SWITCHES		
APPROVALS					PART NO. K1-1519SA-03		
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2°		DRAWING NO.		SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			