



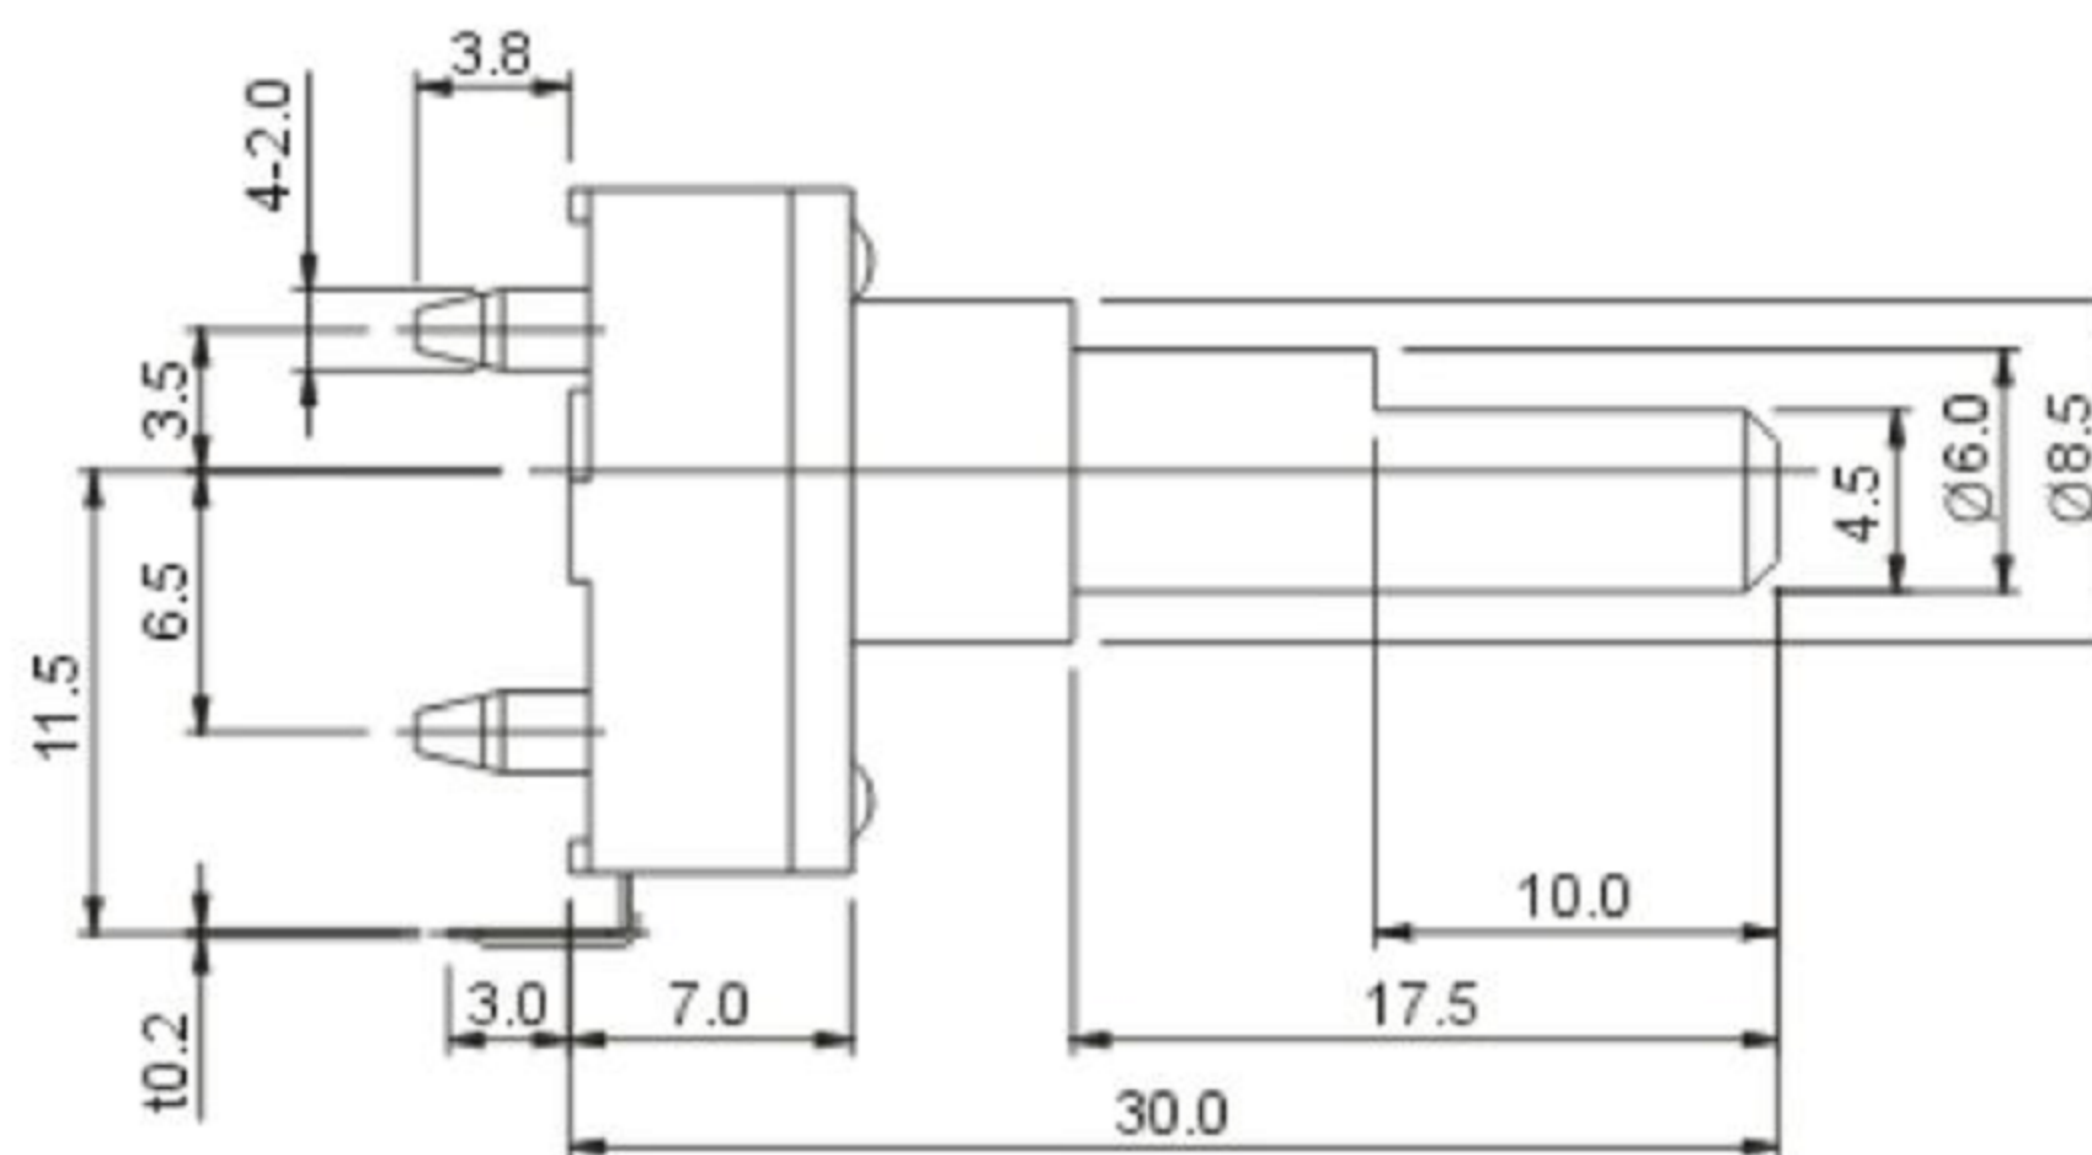


CAD FILE:

ROHS

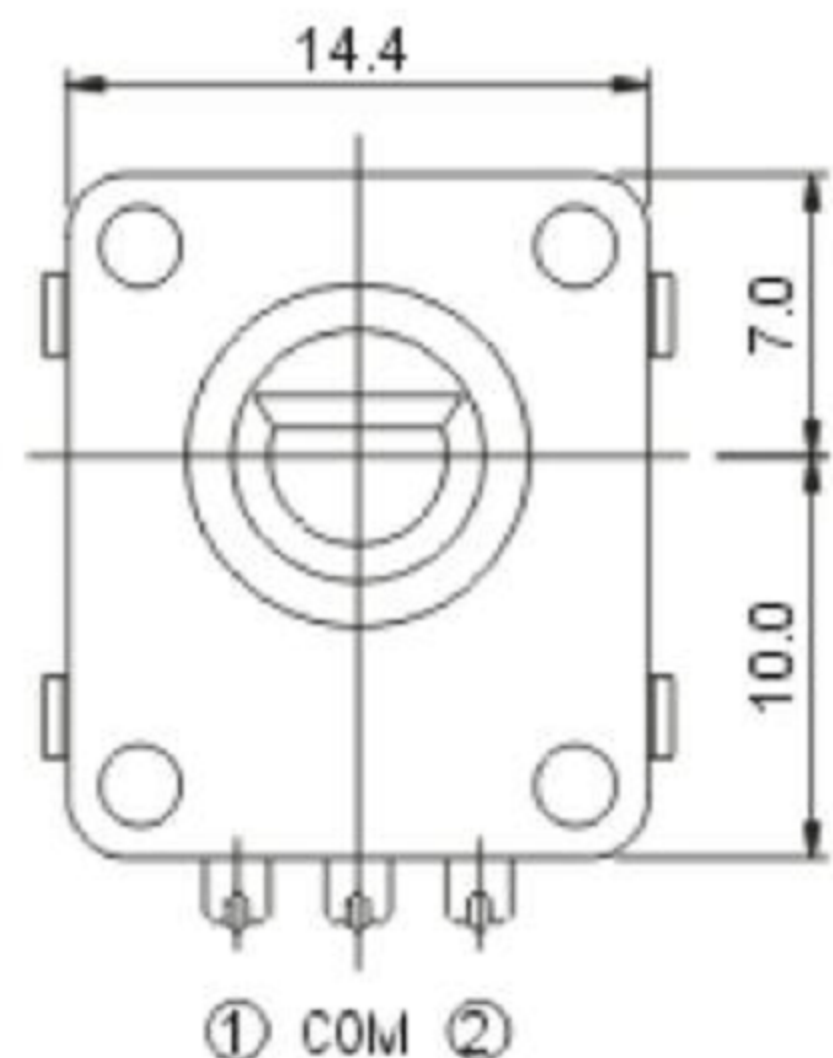

1. Rating: DC 28V 10mA
2. Contact Resistance: 30mΩ
3. Total Rotation Angle: 360° (Endless)
4. Number of step: 24 Steps
5. Step Angle: 15°
6. Rotation Torque: 50gf 100gf.cm
7. Operating Life: 30,000 Cycles
8. Circuit: 2 Bit

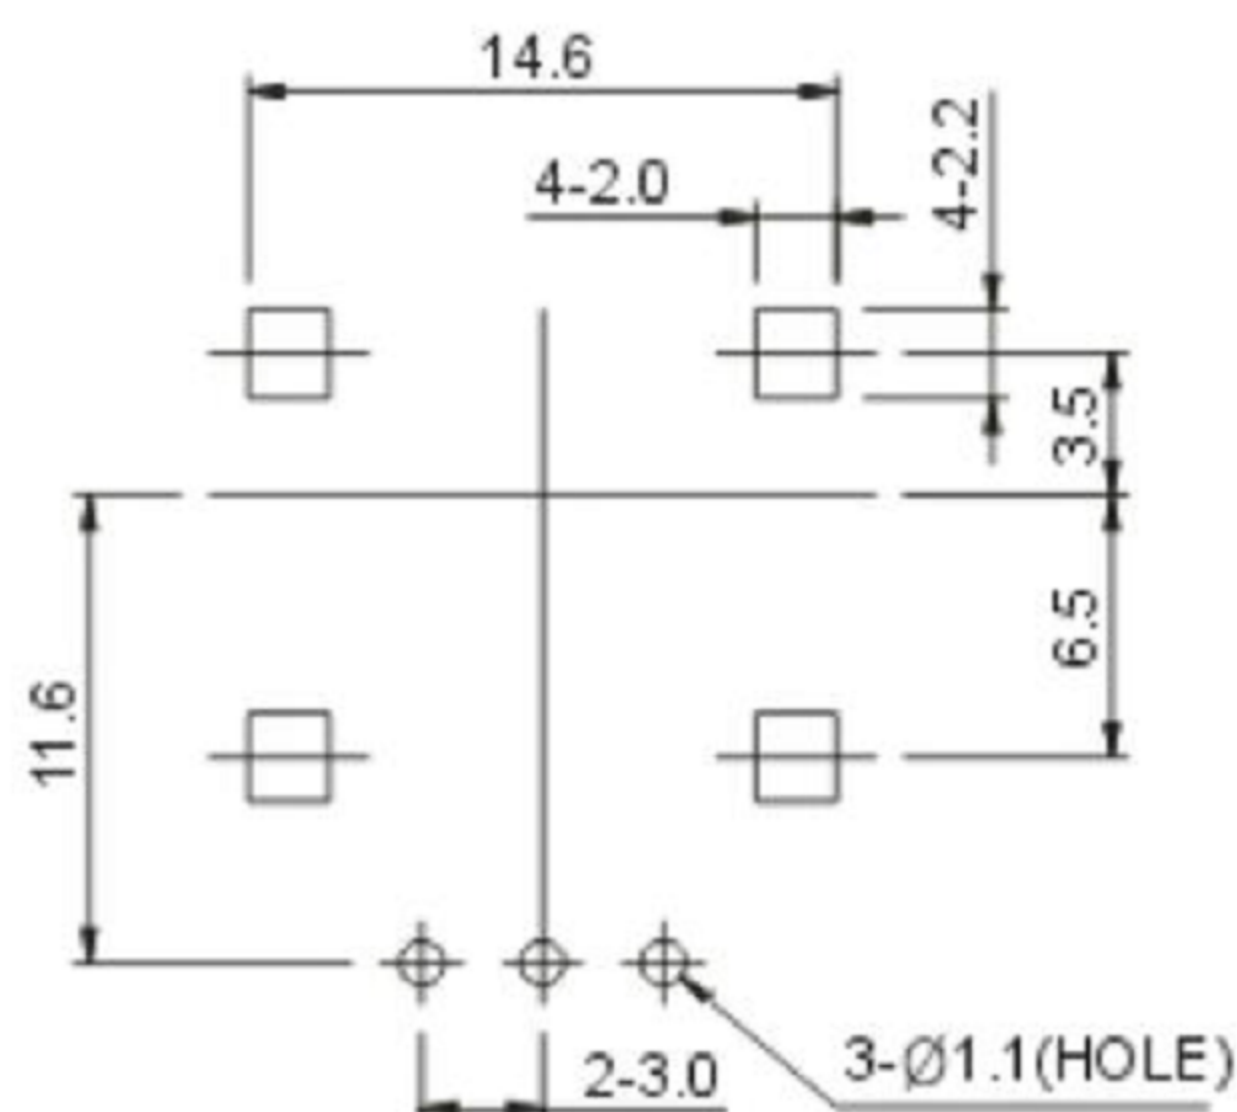

P.C.B HOLE DIMENSION

Shaft Position	C.C.W																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Terminal 1	X	O	O	X	X	O	O	X	X	O	O	X	X	O	O	X	X	O	O	X	X	O	O	X
Terminal 2	X	X	O	O	X	X	O	O	X	X	O	O	X	X	O	O	X	X	O	O	X	X	O	O
* O: ON X:OFF																								

C.W

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED		TITLE : Encoder Swith		UNIT : mm	DRWG NO.:	XB-JES-1424	
8					WITHIN 1.5mm : ±0.1mm		MODEL: XB-JES-1424		SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
7					OVER 1.5mm : ±0.2mm		DONG GUAN XI BANG ELECTRONICS CO., LTD.		APPD.	ZENQ. CHEN	2012-9-25	
6					A		2012-9-25		初版		ZENQ. CHEN	
5					ISSUE		DATE		DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD								
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED								
2	COVER	STEEL STRIP	1	Ni PLATED								
1	KNOB	PPA	1	BLACK								