
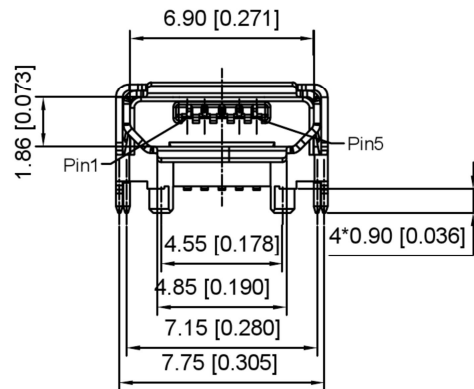

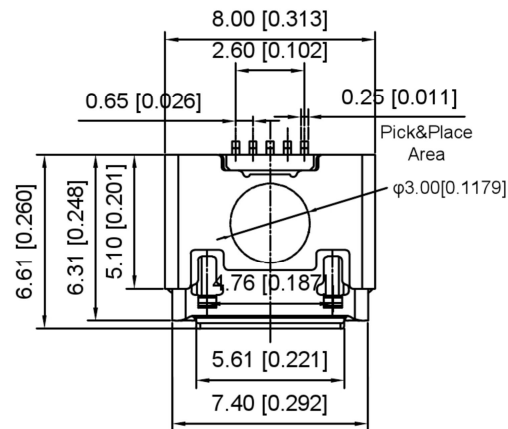


Material
Housing Material: LCP, UL94V-0, black
Contact Terminal: Copper Alloy
Metallic Shell: Sus
Electrical
Voltage Rating: 30 V AC
Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A
Contact Resistance: 30mΩ Max
Insulation resistance: 1000MΩ Min
Dielectric withstanding voltage: 250V AC/Minute
Mechanical
Durability: 10,000 cycles
Mating Force: 35N (3.57Kgf) Max
Unmating Force: 8N (0.82Kgf) Min.

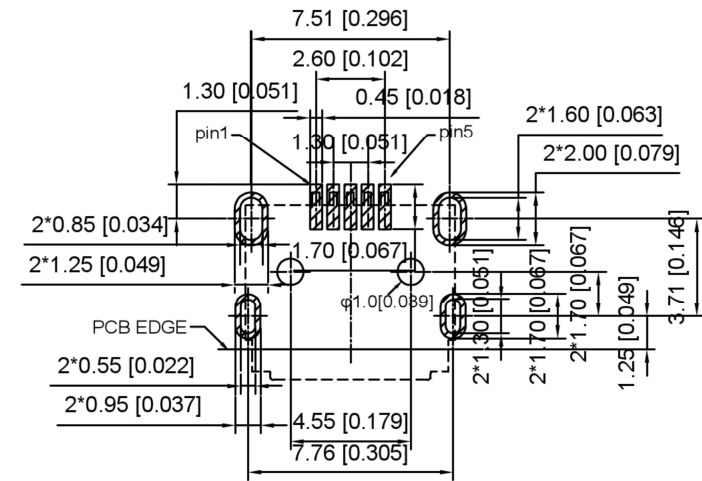

RECOMMENDED PCB LAYOUT
TOP VIEW(XX±0.05)

							DSND		SCALE: N/A	MODEL TYPE: MICRO USB		
							DWN		VIEW: 	PART NO.:		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4	U-D-M7DS-G-1		
							DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
REVISIONS						UNSPECIFIED TOLERANCES				1/1	A0	
www.alpsr.com www.gdxjdz.com www.xbswitch.com												
				ANGLAR	±5°							
				L≤ 4	±0.2							
				4<L≤ 16	±0.3							
				16<L≤ 63	±0.4							
				L> 63	±0.5							
	DATE	REVISED	APPROVED									