
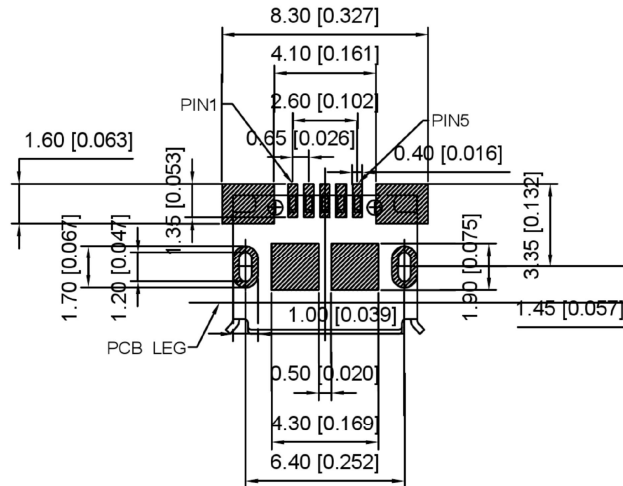
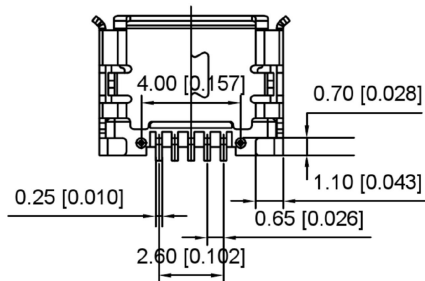
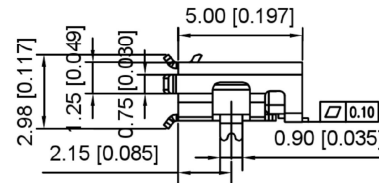
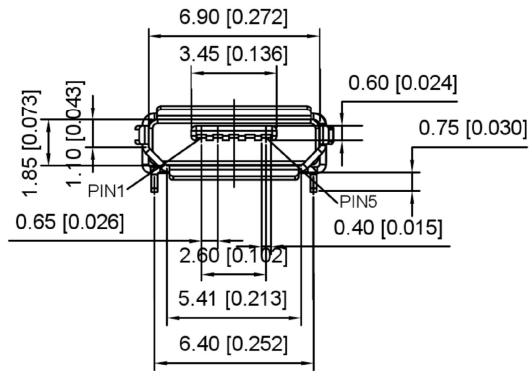
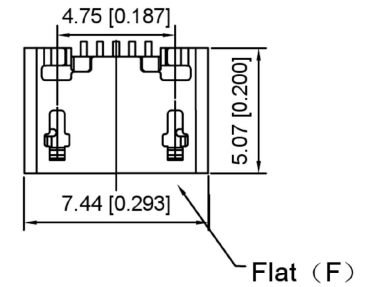



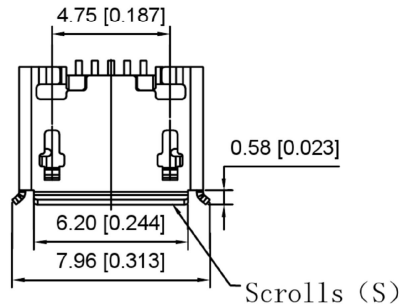

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLRANCE: ± 0.05)

Material

Housing Material: LCP, UL94V-0, black

Contact Terminal: Copper Alloy

Metallic Shell: Sus

Electrical

Voltage Rating: 30 V AC

Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A

Contact Resistance: 30m Ω Max

Insulation resistance: 1000M Ω Min

Dielectric withstanding voltage: 250V AC/Minute

Mechanical

Durability: 10,000 cycles

Mating Force: 35N (3.57Kgf) Max

Unmating Force: 8N (0.82Kgf) Min.

U254-05XX-4BH82-XXS
1:AU 1U"
6:AU 30U"
T:TIN
N:NICKEL
1:With 2:Without
S:Scrolls F:Flat

				ANGLAR	$\pm 5^\circ$
				$L \leq 4$	± 0.2
				$4 < L \leq 16$	± 0.3
				$16 < L \leq 63$	± 0.4
				$L > 63$	± 0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: MICRO USB		
DWN		VIEW:	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4	U254-05XX-4BH82-XXS		
		WEIGHT	SHEET	REVISION	
			1/1	A0	