
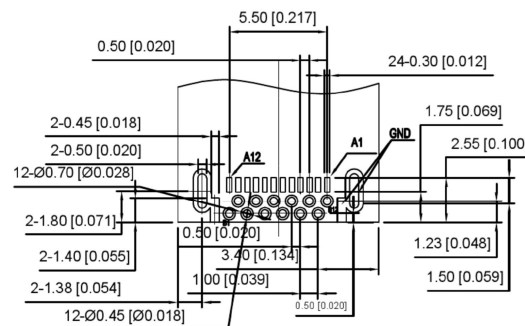
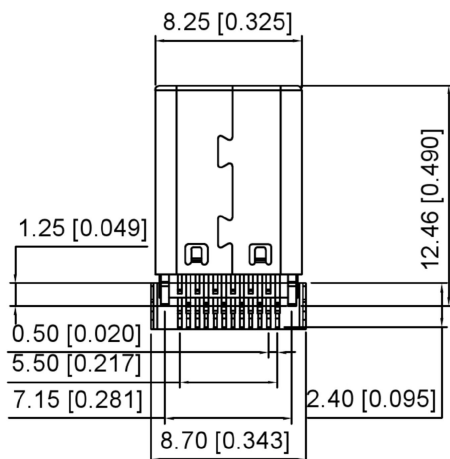
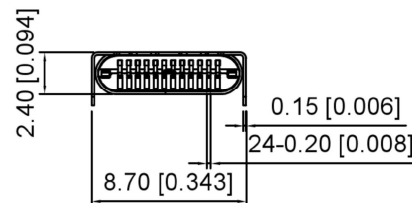


PIN DEFINITION			
PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	VBUS	B9	VBUS
A5	CC	B8	SBUS2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	VCONN
A9	VBUS	B4	VBUS
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND

DURABILITY: 10000 CYCLES

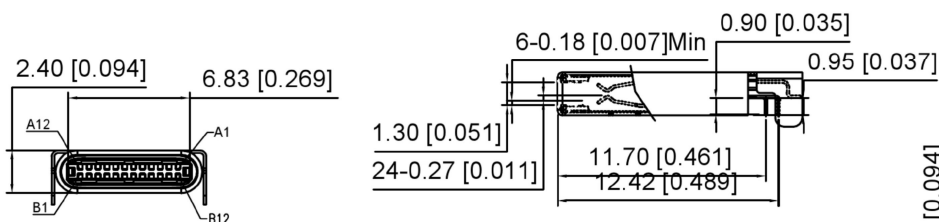

Recommended P.C.B Layout
Tolerance ± 0.05

U261-24XN-4BC2LS

— 1:WITH
2:WITHOUT

— B:BLACK
U:BLUE
W:WHITE
C:CREAM-COLOR

- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

1:Au 1U" MIN
2:Au 15U" MIN
3:Au 30U" MIN

DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1		
DWN		VIEW: 	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4	U261-24XN-4BC2LS		
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
				1/1	A0

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.qdxdz.com www.xbswitch.com					