

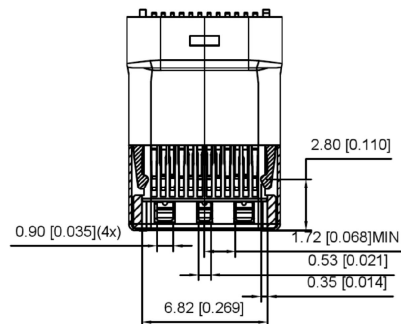


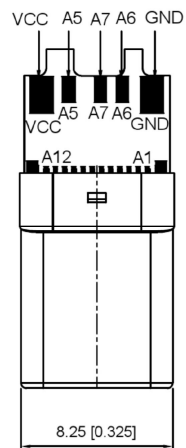

SECT B-B







P/N	R/C
U261-24XXN-4B0215	C(10nF/30V MIN)RD(5.1 KΩ)

U261-24XXN-4B0215

1: Au
2: Ni
1:Au1u"
2:Au3u"
4:Au15u"
5:Au30u"

C TYPE PLUG: PCB:

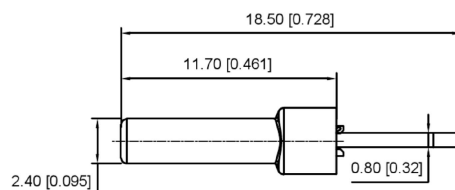

REMARKS:

1.CONTACT INSERTION AND WITHDRAW FORCE:


- 1.Insertion force: 5N-20N max.
2. Withdrawal force: 8N-20N.
- 3.Durability : 10000Cycles.

2.ELECTRIC PROPERTY:

- 1.Contact current rating: 3A.
- 2.Dielectric Strength: 100V AC(RMS).
- 3.Insulation Resistance: 100 megaohms min.
- 4.Contact resistance: 40mOhms MAX.FOR VBUS,GND AND OTHER CONTACT 50mOhms MAX.AFTER ENVIRONMENT TEST


3.AMBIENT TEMPERATURE:

- 1.Operating temperature: -55°C to +85°C.




D

2:1

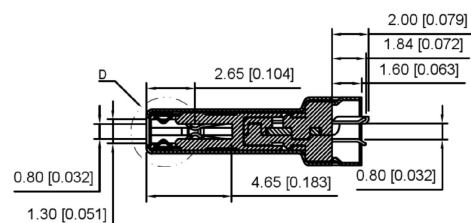

SECT A-A

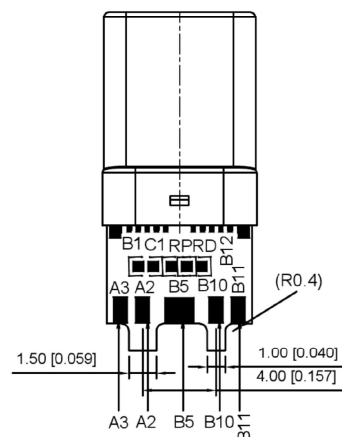

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

6	Shrapnel	SUS T=0.10mm	
5	Shell	SUS T=0.15mm	Ovep-plating: Ni
4	Terminal	C7025 T=0.15mm	Ovep-plating: Au Ni/Sn
3	Latch	SUS T=0.4mm	
2	Housing	LCP	UL94-0
1	Housing Stopper	LCP	UL94-0
ITEM	DESCRIPTION	MATERIAL	REMARKS

							DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1								
							DWN		VIEW: 	PART NO.:								
							CHKD		UNIT: mm/in	DWG NO.:								
							APPD		SIZE: A4	U261-24XXN-4B0215								
														WEIGHT	SHEET	REVISION		
REVISIONS						UNSPECIFIED TOLERANCES						DONG GUAN XI BANG ELECTRONIC CO., LTD					1/1	A0
www.alpsr.com www.gdxjdz.com www.xbswitch.com																		