


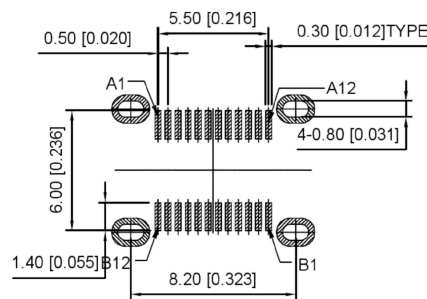
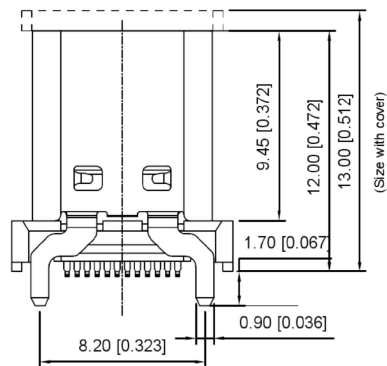



WITHOUT COVER

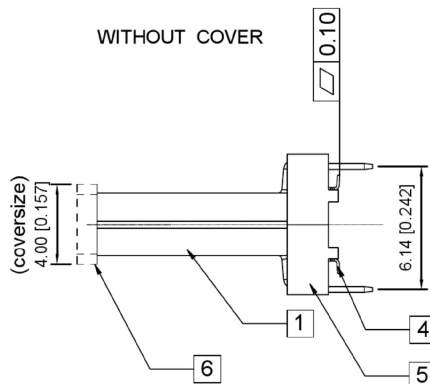

WITH COVER



RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05
KEEP OUT AREA

1. Contact Resistance: 40mOHM Max.;
2. Dielectric Withstanding Voltage: 100V AC For 1 Minute
3. Insulation Resistance: 100M OHM Min.;
4. Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST:
5. Durability: 10000 Cycles;

U263-24XN-4BQC16

Mating Area plating

- 01: Au 1u" Min.
- 03: Au 3u" Min.
- 05: Au 5u" Min.
- 10: Au 10u" Min.
- 15: Au 15u" Min.
- 30: Au 30u" Min.

Item	Title	Material	Dispose	Q'TY
1	Shell	SUS304	Ni: 30u" Min.	1PCS
2	GND Plate	SUS301		2PCS
3	Mid Plate	SUS301		1PCS
4	Contact	C7025	Mating Area: See P/N Solder Tails: Matt Tin	2PCS
5	Insert Molding	LCP E6808	UL 94V-0 Black	1PCS
6	COVER	LCP E6808	UL 94V-0 Black	1PCS

							DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1							
							DWN		VIEW: 	PART NO.:							
							CHKD		UNIT: mm/in	DWG NO.:							
							APPD		SIZE: A4	U263-24XN-4BQC16							
REVISIONS						UNSPECIFIED TOLERANCES						DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com																1/1	A0