
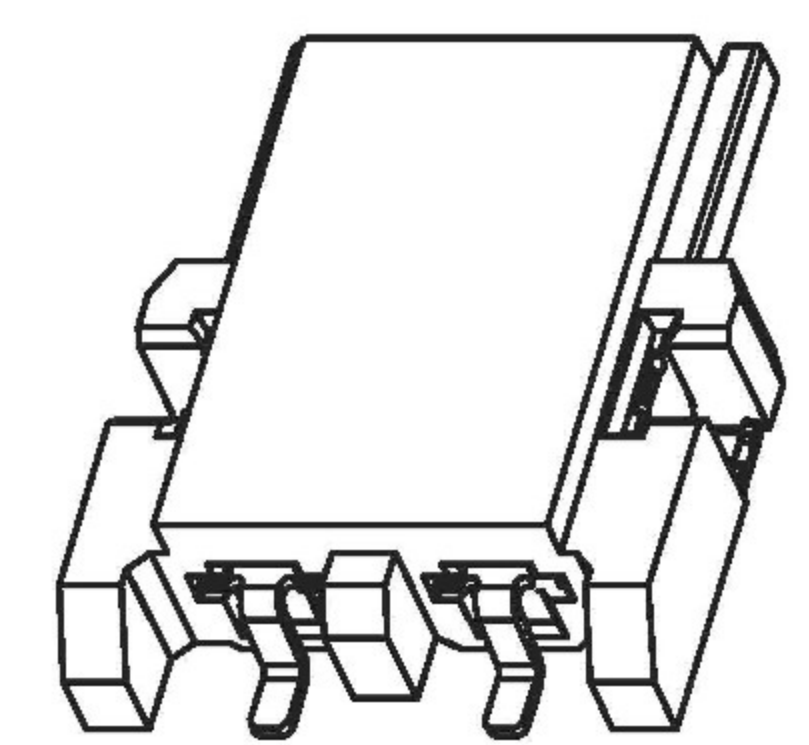
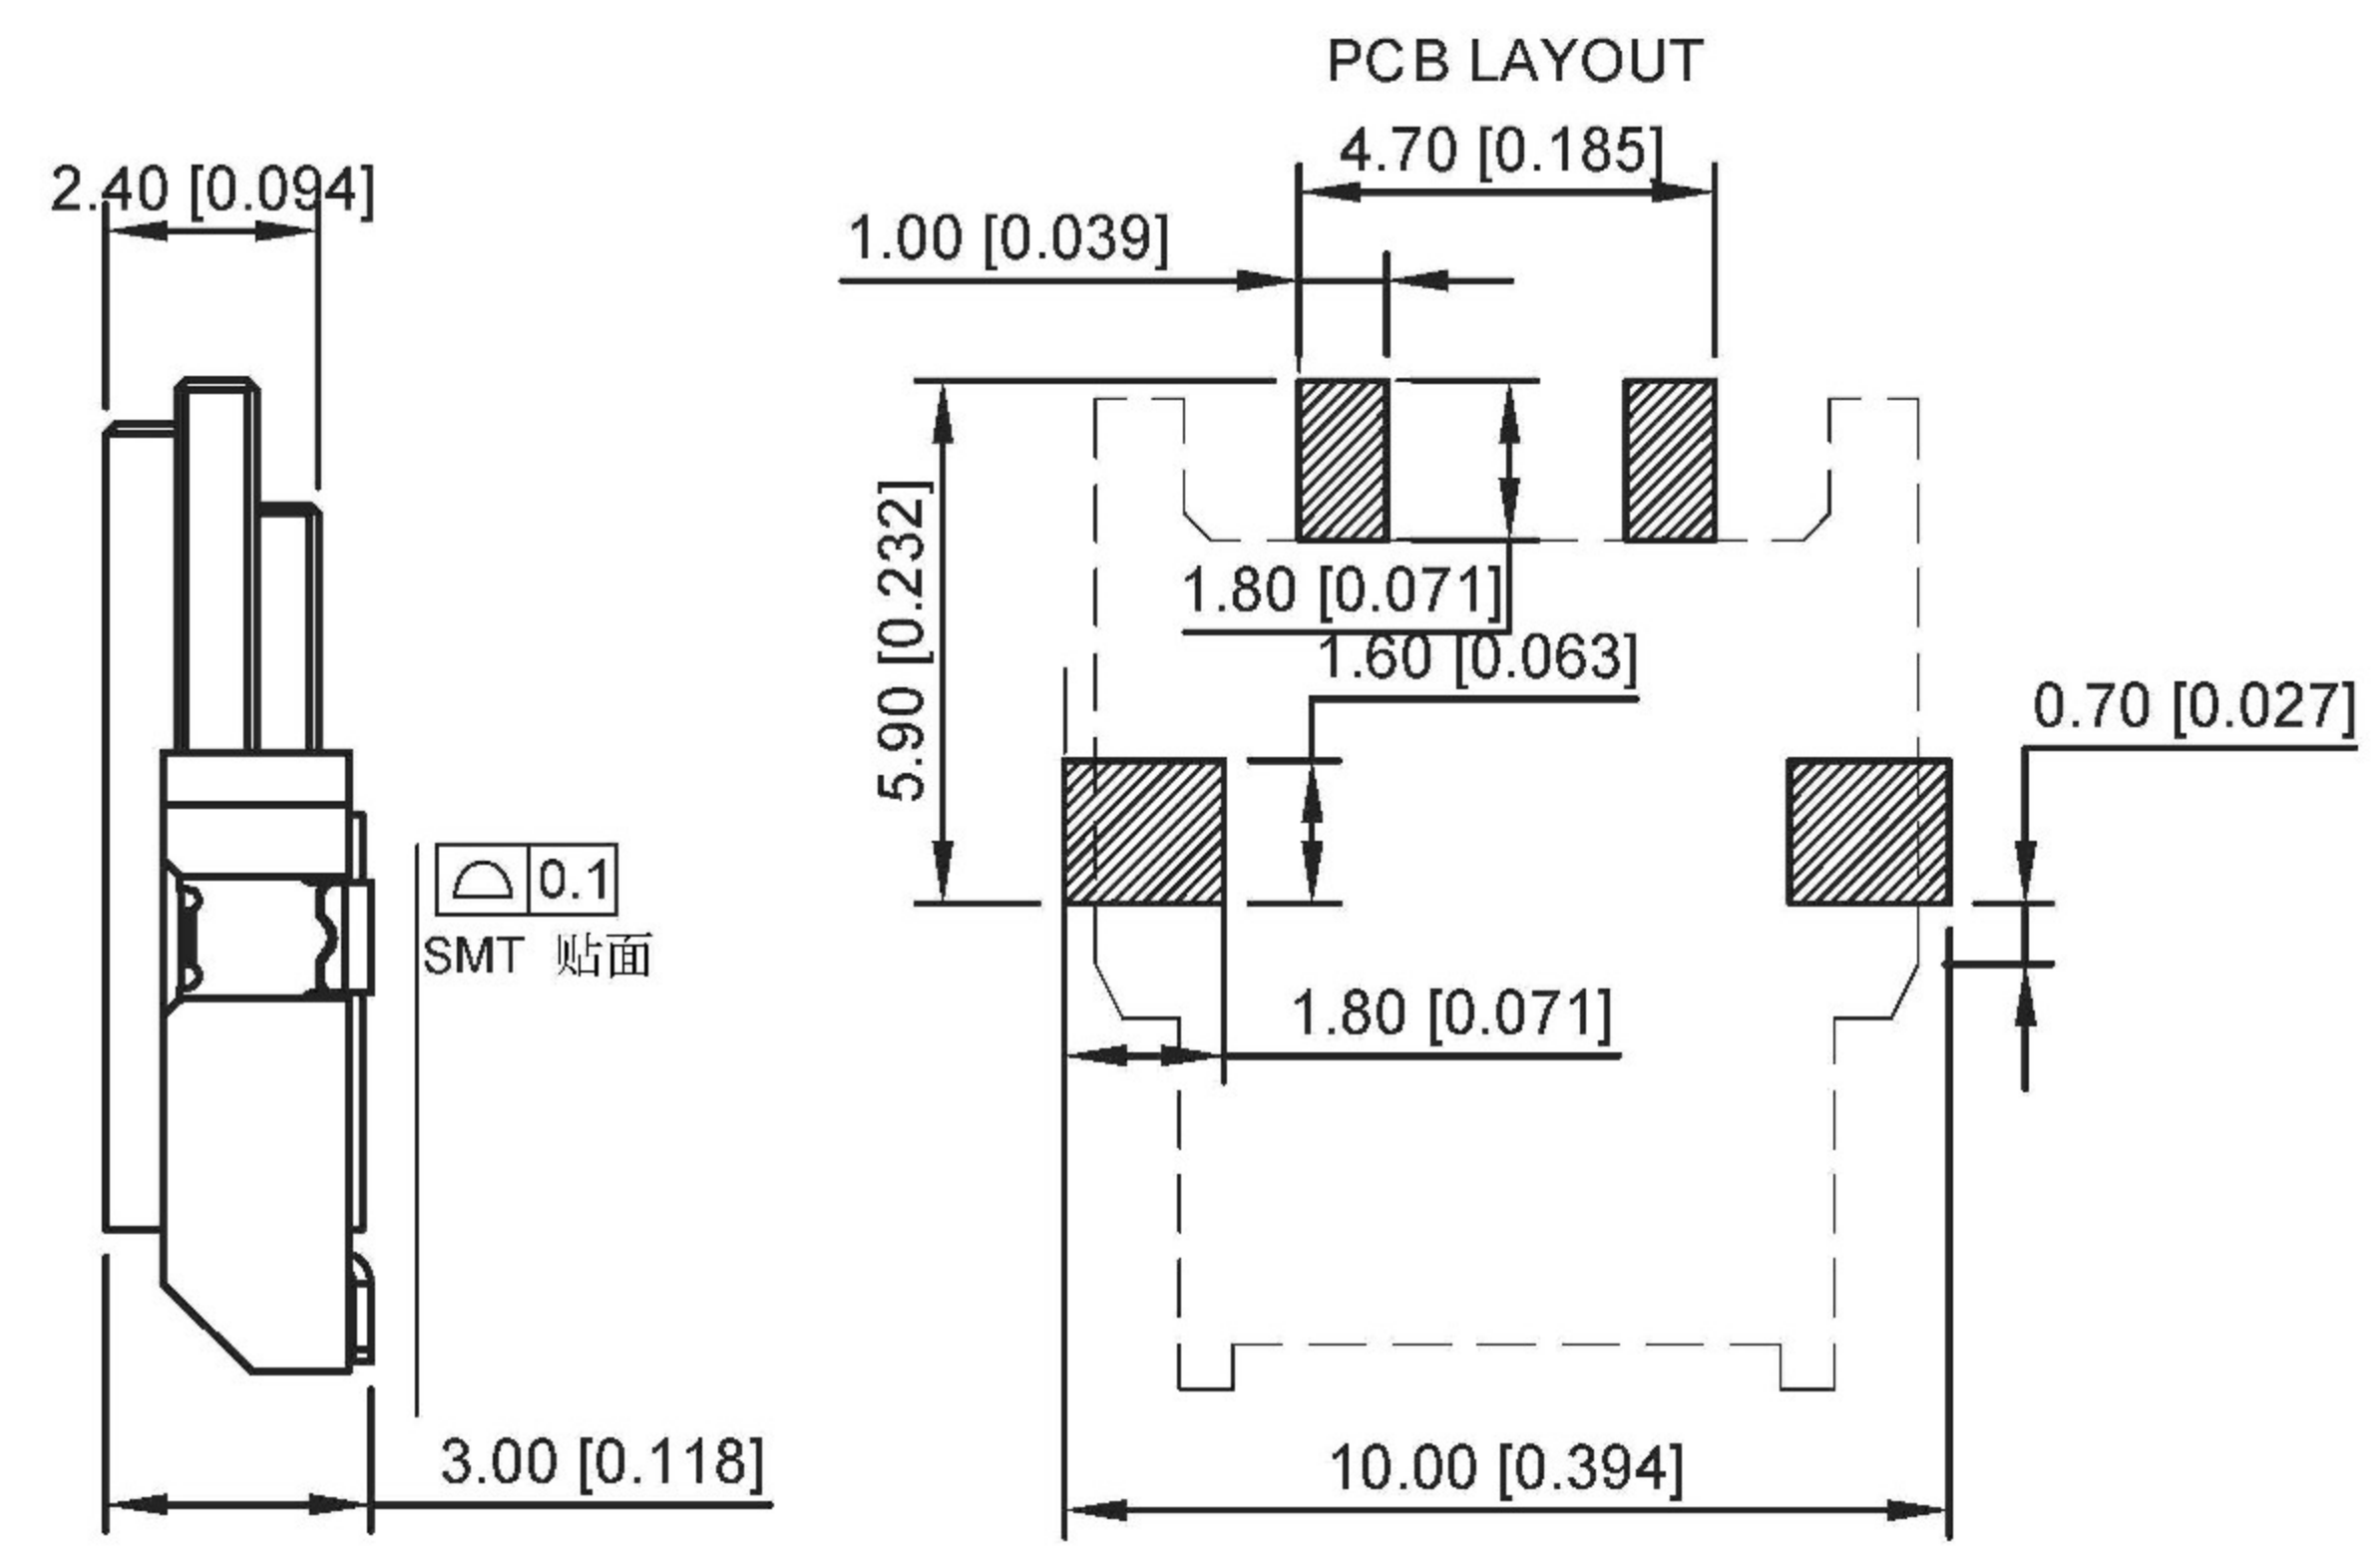


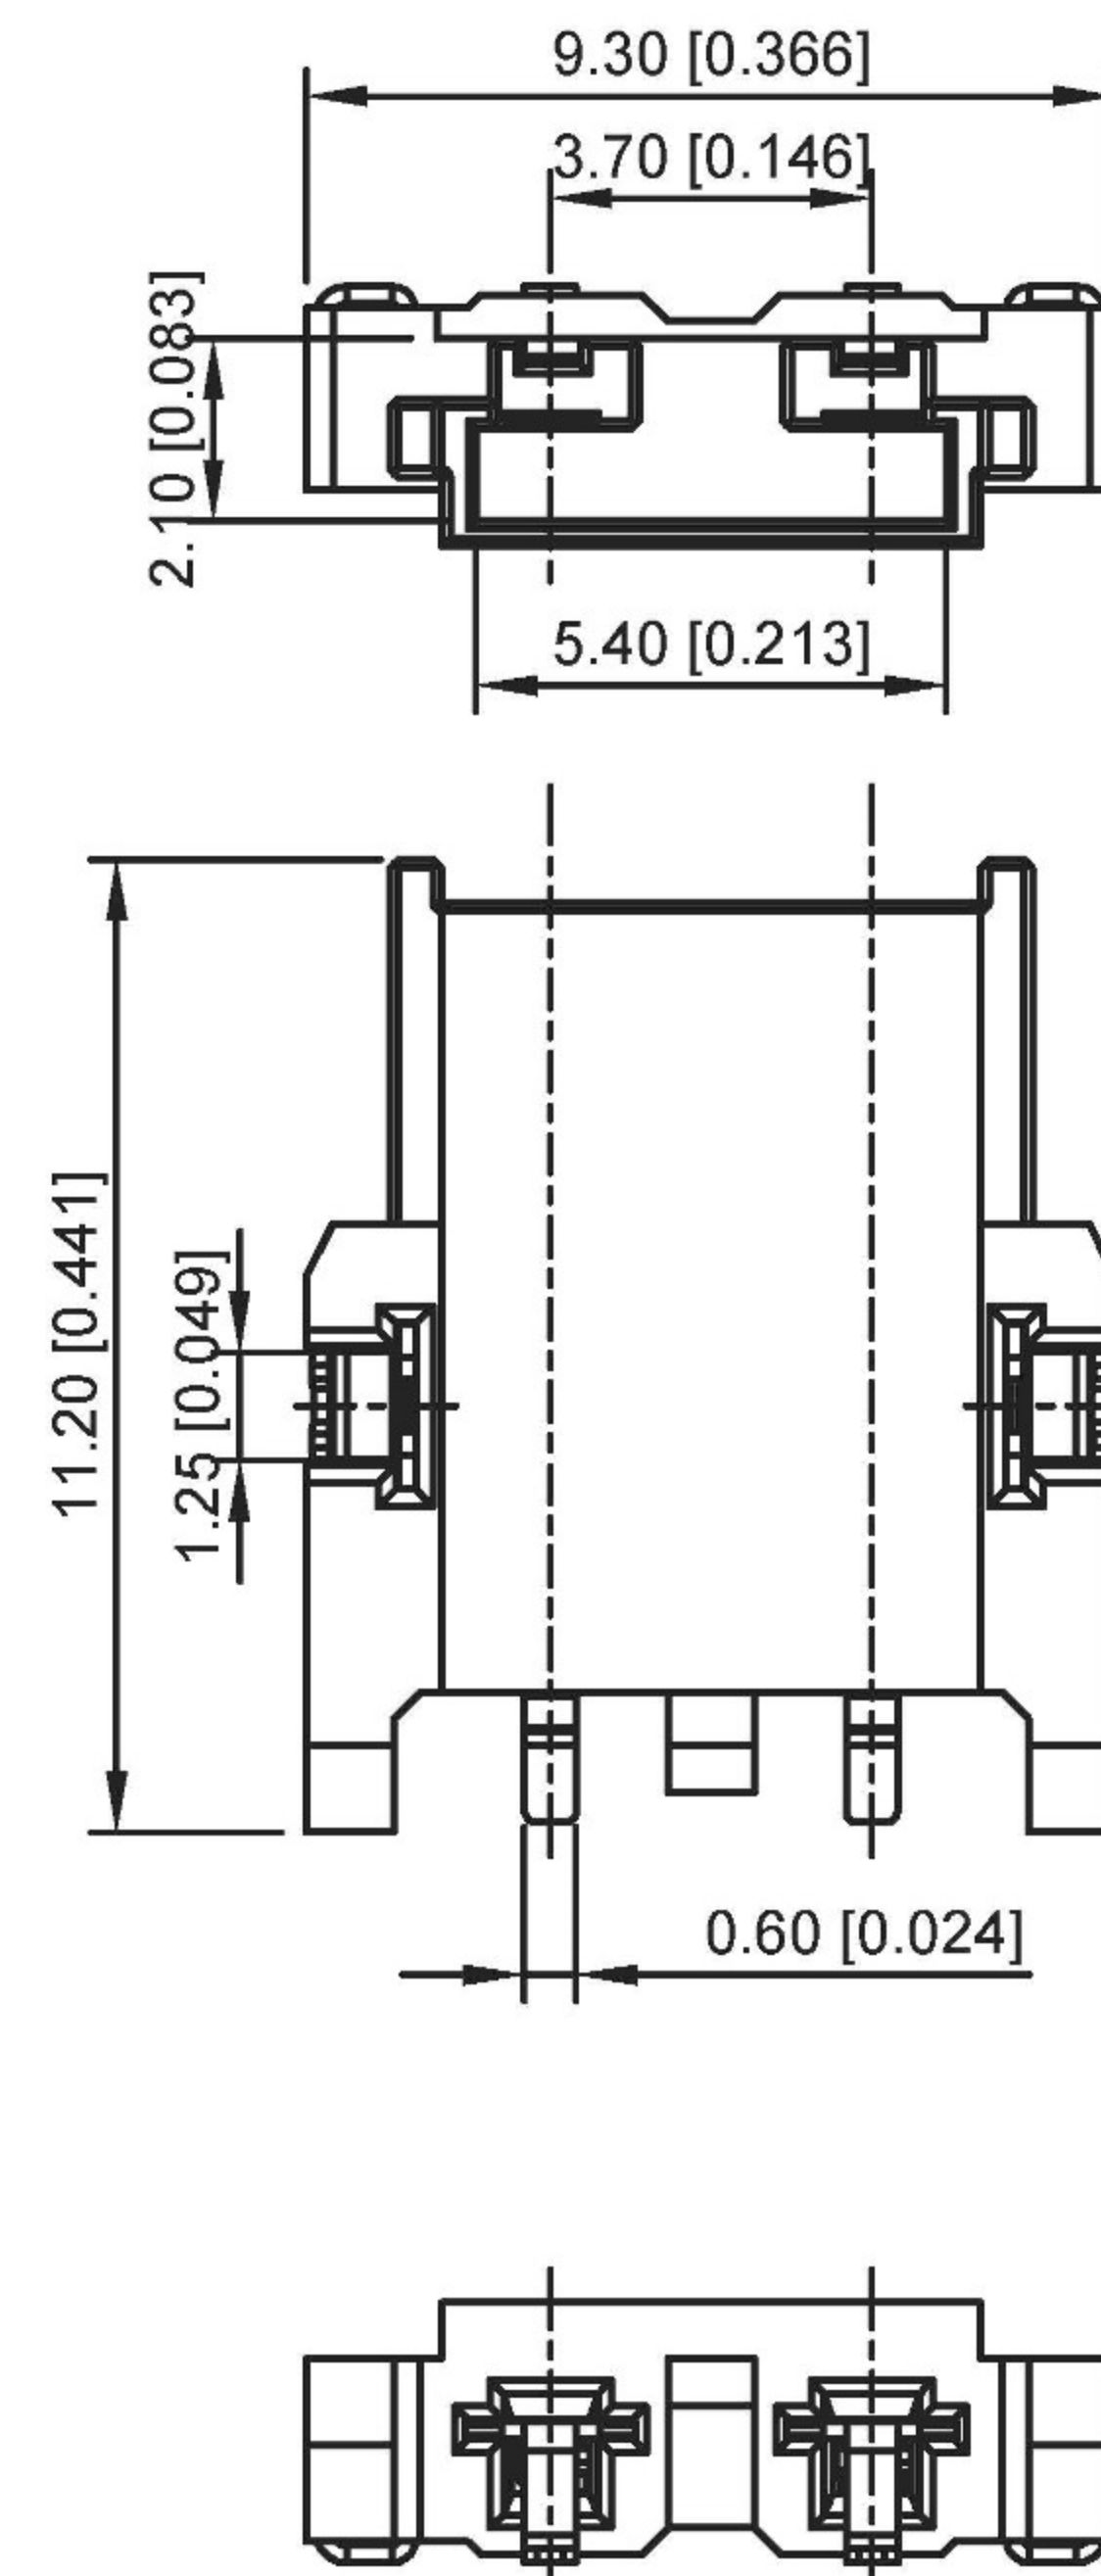

Specifications:
Voltage rating:500V AC/DC
Current rating:2A AC/DC
Withstanding voltage:1500V AC/minute
Temperature range: -40℃ ~85℃
Insulation resistance:≥1000MΩ
Contact resistance:≤40mΩ
After environmental testing:≤80mΩ

X3700W M-02HF-LPSN
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category:W-WAFER
- ③ Welding Board Angle:M-Male
- ④ Row No.-Pin No.:02-Single Row
- ⑤ Plug the Pin&Special No.:HF-Halogen Free
- ⑥ Material:LP-LCP 94V-0
- ⑦ Plating Category:SN-Bright Tin Plating

X3700WM-02HF-LPSN	LCP UL 94V-0 Halogen Free	Phosphor Bronze	Matte Tin-Plated	Phosphor Bronze	Matte Tin-Plated	X3700WF
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)	Mates With Housing

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X3700WM-XXHF-LPSN_1		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4 < L ≤ 16	±0.3		APPD		SIZE: A4			
				16 < L ≤ 63	±0.4							
				L > 63	±0.5							
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com											1/1	A0