

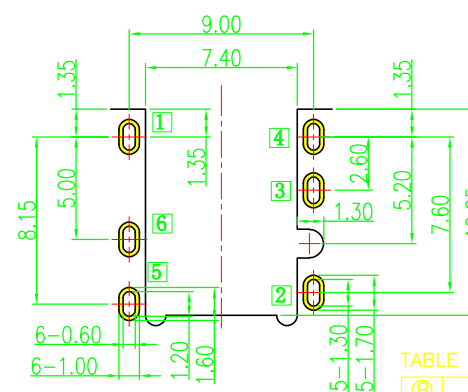


NOTES:


1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 1 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial),
100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial),
50 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 0.3~3.0Kgf.
 - 4.2. UNMATING FORCE: 0.3~3.0Kgf.
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. SALT SPRAY: 48H.
 - 5.2. OPERATION: -30℃~+80℃.

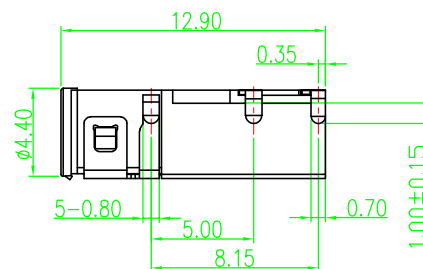


TOP VIEW (TOLRANCE:±0.05)

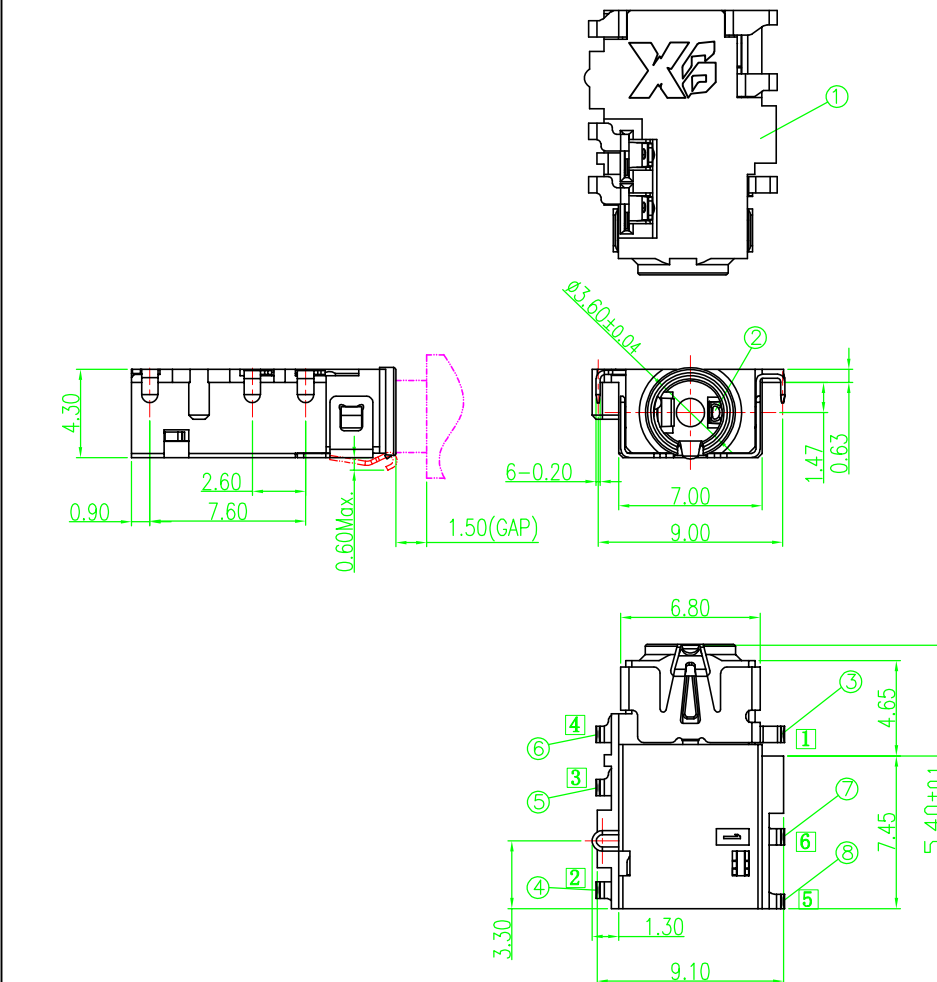

PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC
Technical drawing of the plug with dimensions: - Total length: 14.00 - Thread length: 8.50 - Outer diameter: $\varnothing 3.20 \pm 0.05$ - Inner diameter: 2.50 - Chamfer: 3-0.70	Schematic diagram showing the pin configuration: 1 M/G 2 L 3 R 4 G/M 5 6	Schematic diagram showing the plug inserted into the connector, with the same pin configuration as the previous schematic.

UNLESS OTHERWISE SPECIFIED TOLERANCES		XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—
 3RD ANGLE PROJECTION		UNIT: mm	
DESIGN:		Tony	2021.11.11
CHECK:			
APPROVED:		Andy	2021.11.11
PART NAME:		Φ3.5 AUDIO JACK	
PART NO.:		XB-PJ03506-0401-00000	
SHEET: 1/2		REV.: A1	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

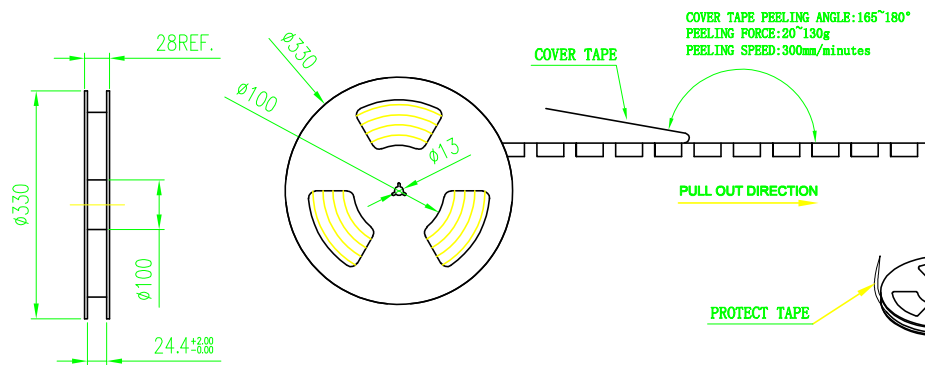

COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g
PEELING SPEED:300mm/minutes

PULL OUT DIRECTION

PROTECT TAPE

10 DISK

VACUUM BAG


DRYER

FOLDER PAPER BOARD

OUTSIDE LABEL

CARTON

ADHESIVE TAPE (80~150mm)

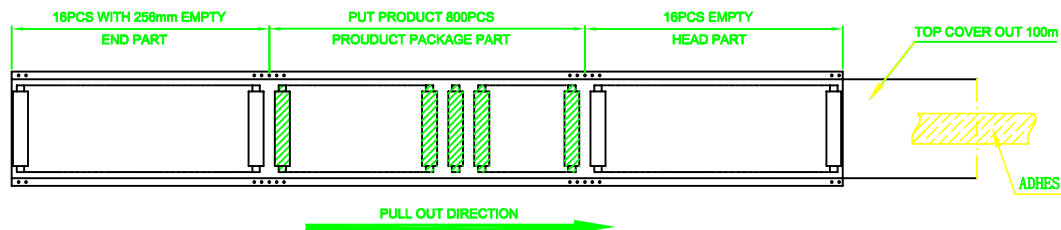


NOTES:

1.Material requirements:

- 1.1 The carton material requirements for the B=B, Dimension is 350*340*310mm;
- 1.2 Reel materials for PS; size reel for 330*28.


2.Packaging requirements:

- 2.1 The tape into the packing machine, before the empty 16PCS, after the release of the product 800PCS, then the empty 16PCS with 256mm length of stay;
- 2.2 Top cover should out 100mm of the carrier tape.After winding, using adhesive tape(80~150mm) to stick the leader of cover tap on the side of the carrier tape;
- 2.3 Winding a protect tape arround the reel,then stick it by adhesive tape;
- 2.4 label should paste in the designated area of the reel;
- 2.5 Put a dryer and a packed reel in the vacuum bag and make the vacuum process;
- 2.6 The tired folded 10 disks in the carton total 8000pcs;
- 2.7 Packed finished packing sealing, and in the outer carton label



CARTON SIZE

1 CARTON = 10 REEL = 8000 PRODUCT

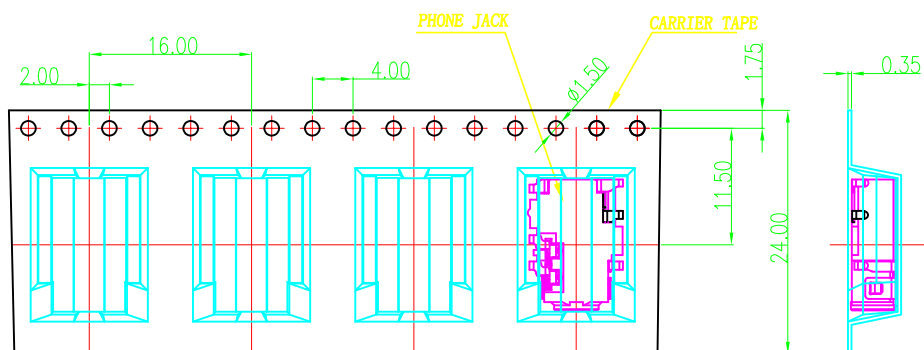

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:

DIM TOL

X. ±0.50

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

ANGLES:

DIM TOL

X. ±2°

X.X ±1°

X.XX ±1°

X.XXX ±1°

DESIGN:

Tony

2021.11.11

CHECK:

APPROVED:

Andy

2021.11.11

PART NAME:

Φ3.5 AUDIO JACK

PART NO.:

XB-PJ03506-0401-00000H

SHEET: 2/2

REV.: A1

REV. ECN NO. DESCRIPTION DESIGN DATE

3RD ANGLE PROJECTION

UNIT: mm

8

7

6

5

4

3

2

1