







DATE CODE:

Y M DD LL

Line
Date
Month
Year



3D VIEW

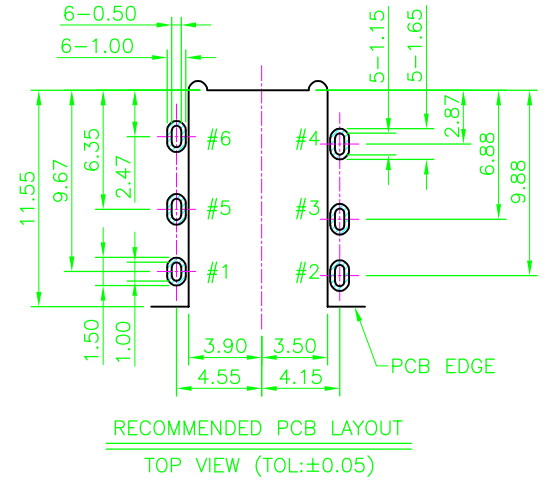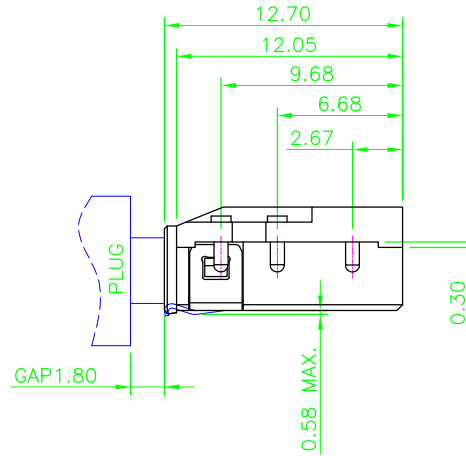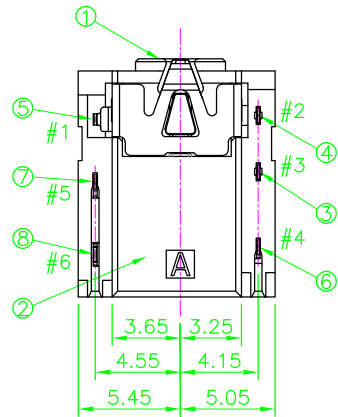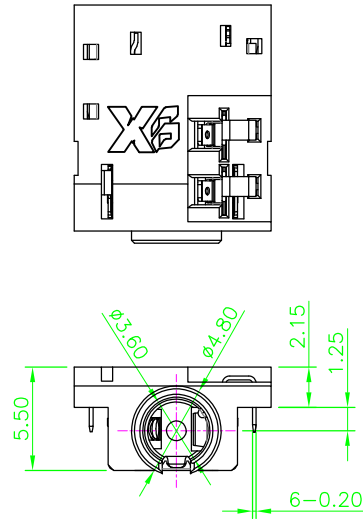

RECOMMENDED PCB LAYOUT
TOP VIEW (TOL:±0.05)

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 1 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 50 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 3.0Kgf MAX.;
 - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. OPERATION: -30°C~+80°C.

TABLE 1:


⑧	MAKE	⑥	1	Phosphor bronze	GOLD FLASH ON CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER NI 40μ"MIN	T=0.20mm
⑦	TRANSFER	⑤	1	Phosphor bronze		T=0.20mm
⑥	TIP	④	1	Phosphor bronze		T=0.20mm
⑤	EARTH	①	1	Phosphor bronze		T=0.20mm
④	RING B	②	1	Phosphor bronze		T=0.20mm
③	RING A	③	1	Phosphor bronze		T=0.20mm
②	SEPARATOR		1	HIGH TEMP. PLASTIC	UL94 V-0	BLACK
①	HOUSING		1	HIGH TEMP. PLASTIC	UL94 V-0	SEE TABLE
NO.	PART NAME	QTY		MATERIAL	DESCRIPTION	REMARK

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ3.5mm Phone Jack CONN.
DIM	TOL	DIM	TOL		2021.3.15	
X.	±0.50	X.	±2°	CHECK:		PART NO. XB-PJ03506-0572-00000H
X.X	±0.30	X.X	±1°			SHEET: 1/2
X.XX	±0.20	X.XX	—			REV.: A1
X.XXX	±0.10	X.XXX	—	APPROVED	Andy	DRAWING NO
3RD ANGLE PROJECTION		UNIT: mm			2021.3.15	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

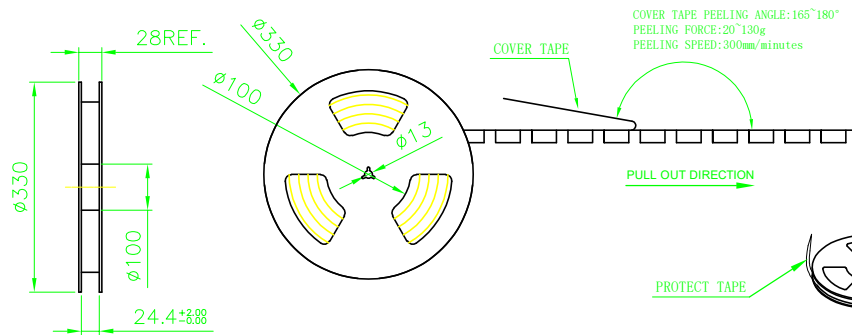

COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g
PEELING SPEED:300mm/minutes

COVER TAPE

PULL OUT DIRECTION

PROTECT TAPE

10 DISK


VACUUM BAG

DRYER

FOLDER PAPER BOARD

OUTSIDE LABEL

CARTON

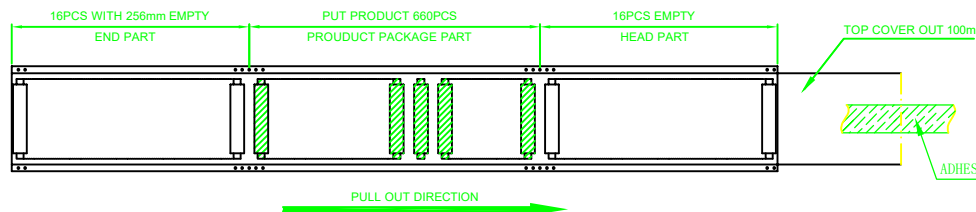

PULL OUT DIRECTION


NOTES:

1.Material requirements:

- 1.1 The carton material requirements for the B=B, Dimension is 350*340*310mm;
- 1.2 Reel materials for PS; size reel for 330*28.


2.Packaging requirements:

- 2.1 The tape into the packing machine, before the empty 16PCS, after the release of the product 660PCS, then the empty 16PCS with 256mm length of stay;
- 2.2 Top cover should out 100mm of the carrier tape.After winding, using adhesive tape (80~150mm) to stick the leader of cover tap on the side of the carrier tape;
- 2.3 Winding a protect tape arroud the reel,then stick it by adhesive tape;
- 2.4 label should paste in the designated area of the reel;
- 2.5 Put a dryer and a packed reel in the vacuum bag and make the vacuum process;
- 2.6 The tired folded 10 disks in the carton total 6600pcs;
- 2.7 Packed finished packing sealing, and in the outer carton label



CARTON SIZE

1 CARTON = 10 REEL = 6600 PRODUCT

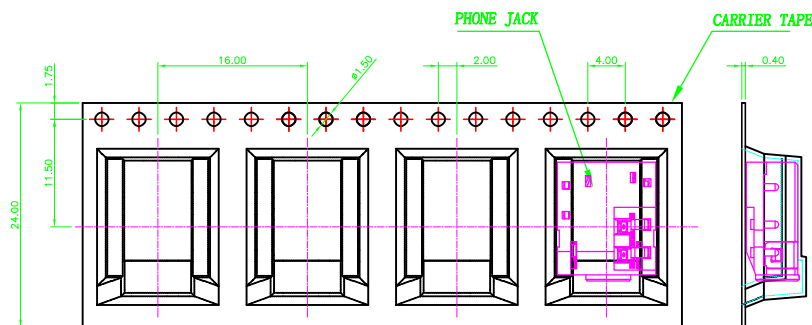

PHONE JACK

CARRIER TAPE

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:		
DIM	TOL	DIM	TOL	CHECK:	2021.3.15	Φ3. 5mm Phone Jack CONN.		
X.	±0.50	X.	±2°		APPROVED	Andy	PART NO.	
X.X	±0.30	X.X	±1°				XB-PJ03506-0572-00000H	
X.XX	±0.20	X.XX	—				SHEET: 2/2	REV.: A1
X.XXX	±0.10	X.XXX	—	UNIT: mm	2021.3.15	DRAWING NO		
								

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------