







CAD FILE:



CIRCUIT DIAGRAM

P.C.B LAYOUT TOP VIEW

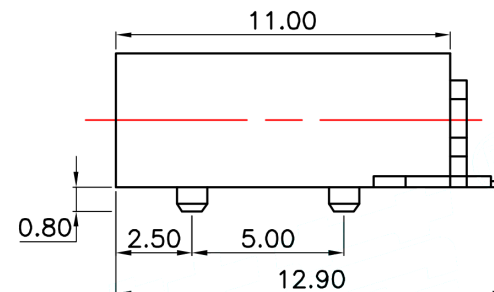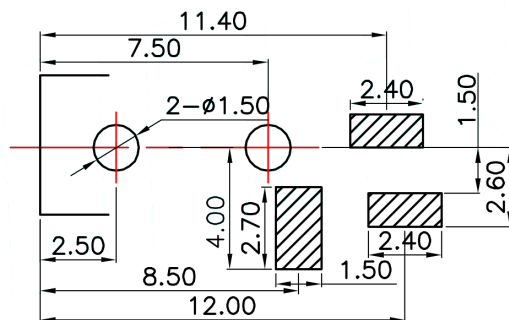

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2023-6-21	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC JACK			UNIT : mm	DRWG NO.: XB-DC-027S
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2023-6-21
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2023-6-21
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2023-6-21
NO.	PARTS	MATERIALS	Q'TY	FINISH					