

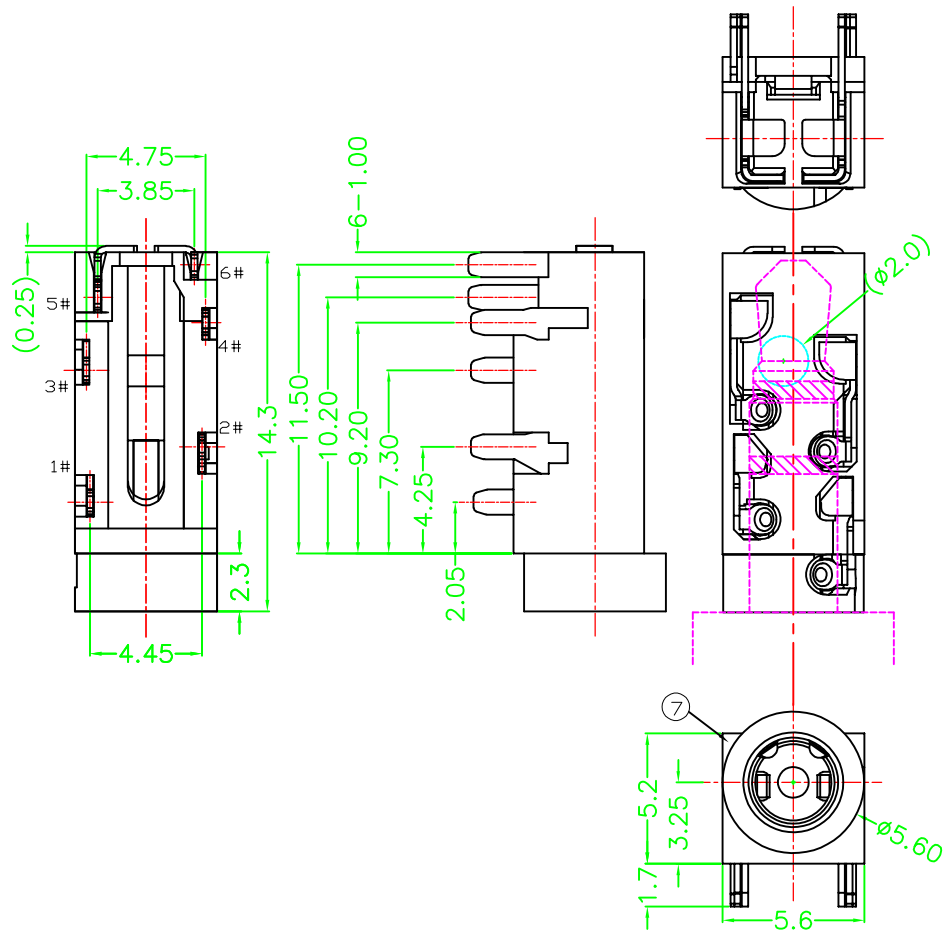




Notes:

- 1.Current Rating: 12V&1A max.
- 2.Contact Resistance: 30mOhms Max.(initial)
- 3.Insulation Resistance: 100M Ohms Min./500V DC
- 4.Dielectric Withstanding Voltage: 500V AC/1Minute
- 5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
- 6.Durability: 10,000 Cycles
- 7.Operating Temperature:-25°C to+85°C

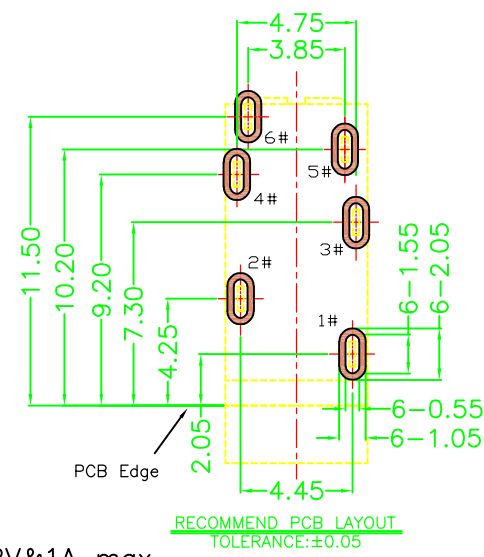

7	Housing	Thermoplastics	Black
6	6#Pin Contact	Copper Alloy	Sn On Solder&Contact Area;Ni Plated Overall.
5	5#Pin Contact		
4	4#Pin Contact		
3	3#Pin Contact		
2	2#Pin Contact		
1	1#Pin Contact		G/F On Contact Area Sn On Solder Tails Ni Plated Overall.
Item	Name	Material	Description

UNLESS OTHERWISE SPECIFIED TOLERANCES

DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

3RD ANGLE PROJECTION

DESIGN: Tony

CHECK:

APPROVED Andy

2022.6.1

2022.6.1

PART NAME:
Φ3.5 AUDIO JACK

PART NO.
XB-PJ03506-0990-00000H

SHEET: 1/1

REV.: A1

DRAWING NO

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------