


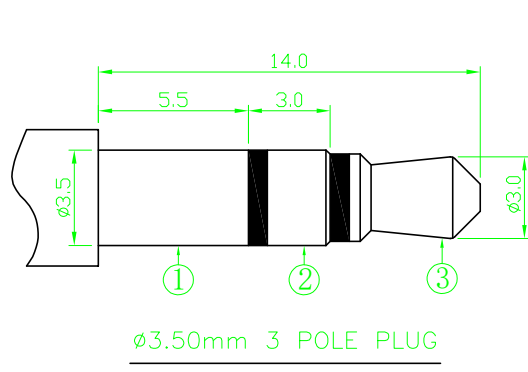


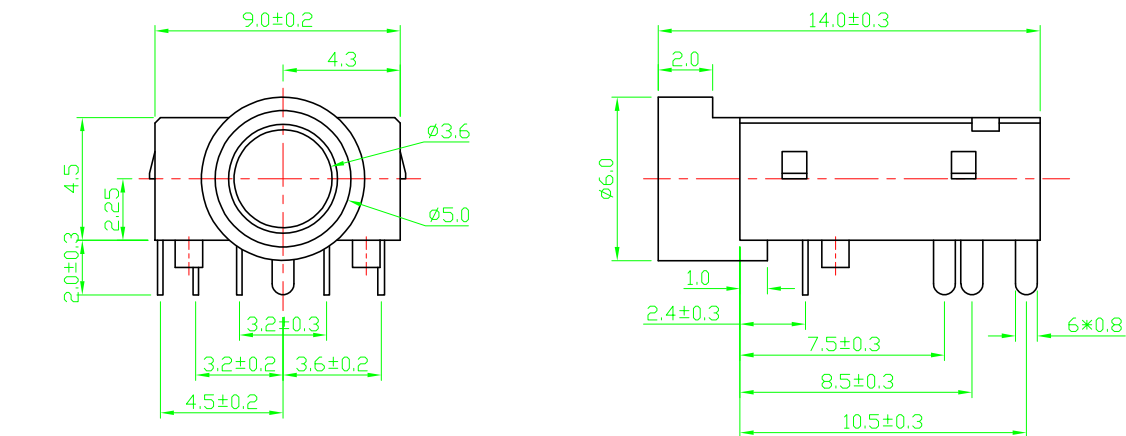


- SPECIFICATION**
1. Rating : DC 30V 1.0A;
 2. Contact resistance: $\leq 0.03\Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-20N;
 6. life test: 5,000 cycles.

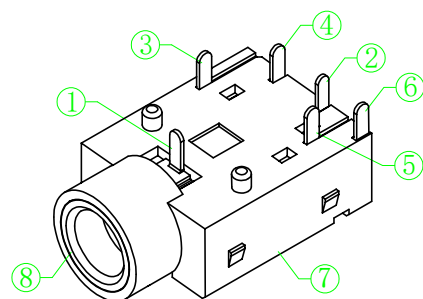

P.C.B LAYOUT
TOP VIEW

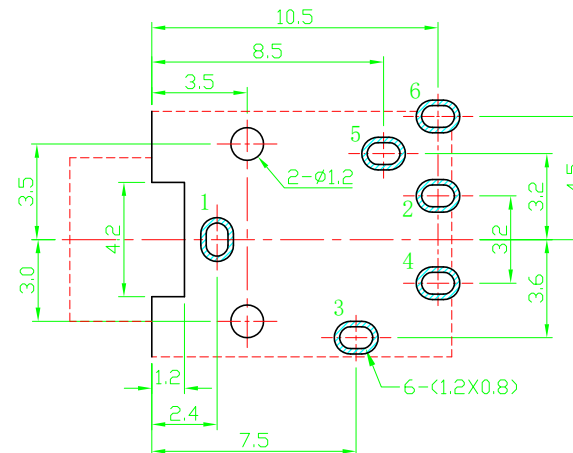

SCHEMATIC



8	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
7	HOUSING	1	PBT	
6	CONTACT FOOT	1	BRONZE	Ag-Plating
5	SPRING PIECE	1	BRONZE	Ag-Plating
4	CURVE PIECE	1	BRONZE	Ag-Plating
3	SPRING PIECE	1	BRONZE	Ag-Plating
2	SPRING PIECE	1	BRONZE	Ag-Plating
1	CONTACT FOOT	1	BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony 2020.3.15	PART NAME: Φ3.5mm Phone Jack CONN.
DIM	TOL	DIM	TOL	CHECK:		PART NO. XB-PJ03506-1035-00000H
X.	±0.50	X.	±2°			SHEET: 1/1
X.X	±0.30	X.X	±1°			REV.: A1
X.XX	±0.20	X.XX				DRAWING NO
X.XXX	±0.10	X.XXX				
3RD ANGLE PROJECTION		UNIT: mm		APPROVED	Andy 2020.3.15	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------