


LASER CARVING DESCRIPTION: XX X XX XX

XX-YEAR: 20 = 2020  
X-MONTH: A = JAN, B = FEB,.....  
XX-DAY: 14 = 14th DAY  
XX-HOUR: 14 = 14 PM

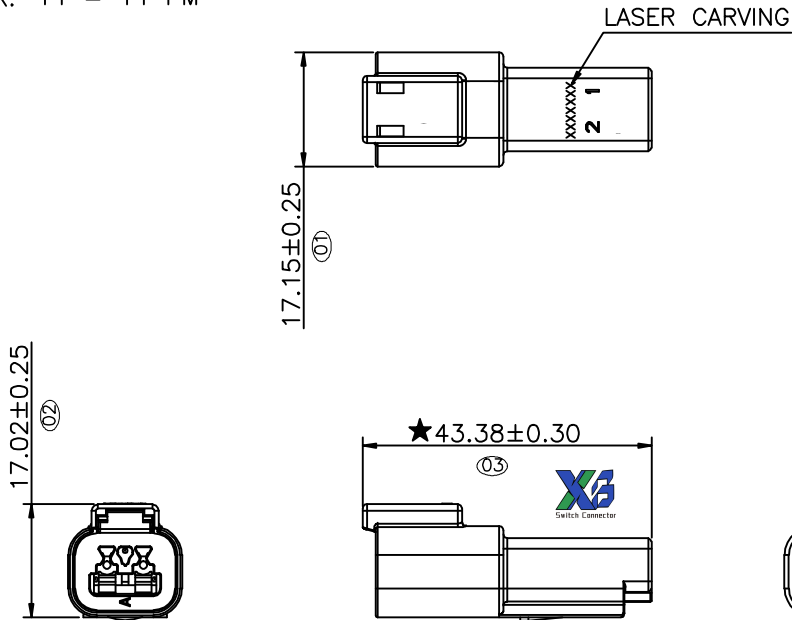

Specifications

Current Rating 14 AWG: 13.0Amp AC/DC  
16 AWG: 13.0Amp AC/DC  
18 AWG: 10.0Amp AC/DC  
20 AWG: 7.5Amp AC/DC

Voltage Rating: 250V AC/DC.

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:1500VAC

Contact Resistance:20mΩMax.

Operating Temperature:-55°C to +125°C

Materials

Insulator Material:High Temperature Thermoplastic,  
UL 94V-0 PA66 or the equivalent material


★All materials must meet Greenconn hazardous  
substances control standards.

★: Significant Characteristics.

indicates product characteristics, functionalities, and  
manufacturing processes regarding to customer's  
specifications

★: Safety Features

indicates product characteristics, functionalities, and  
manufacturing processes complying to legal  
regulations stated by local government

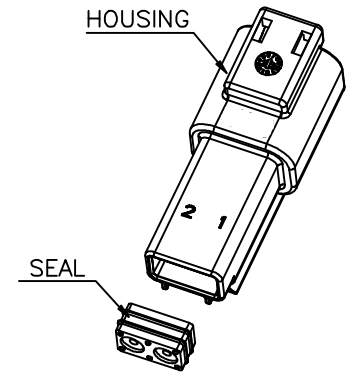

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. A UNIT. mm SCALE. 1:1

3RD.ANG  
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

|            |           |
|------------|-----------|
| X'±3.0'    | X.±0.30   |
| .X'±2.0'   | .X±0.25   |
| .XX'±1.0'  | .XX±0.20  |
| .XXX'±0.5' | .XXX±0.15 |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

XB-AGZ011-02APA

PART NO.

XB-AGZ011-02APA

TITLE.

2 WAY  
RECEPTACLE,STANDARD  
SEAL EXTRA THIN  
SEAL SERIES