

F

E

D

C

B

A

F

E

D

C

B

A



Specifications

Current Rating 14 AWG: 13.0Amp AC/DC
16 AWG: 13.0Amp AC/DC
18 AWG: 10.0Amp AC/DC
20 AWG: 7.5Amp AC/DC

Voltage Rating: 250V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-55°C to +125°C

Materials
Insulator Material:High Temperature Thermoplastic, UL 94V-0 PA66 or the equivalent material

★All materials must meet Greenconn hazardous substances control standards.
★: Significant Characteristics.
indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
★: Safety Features
indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

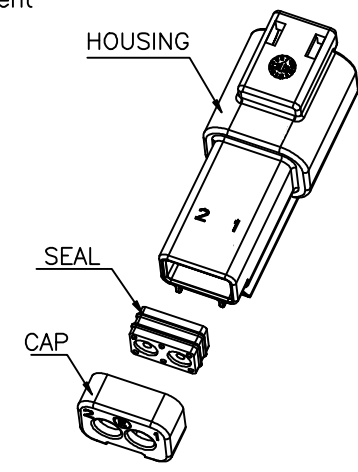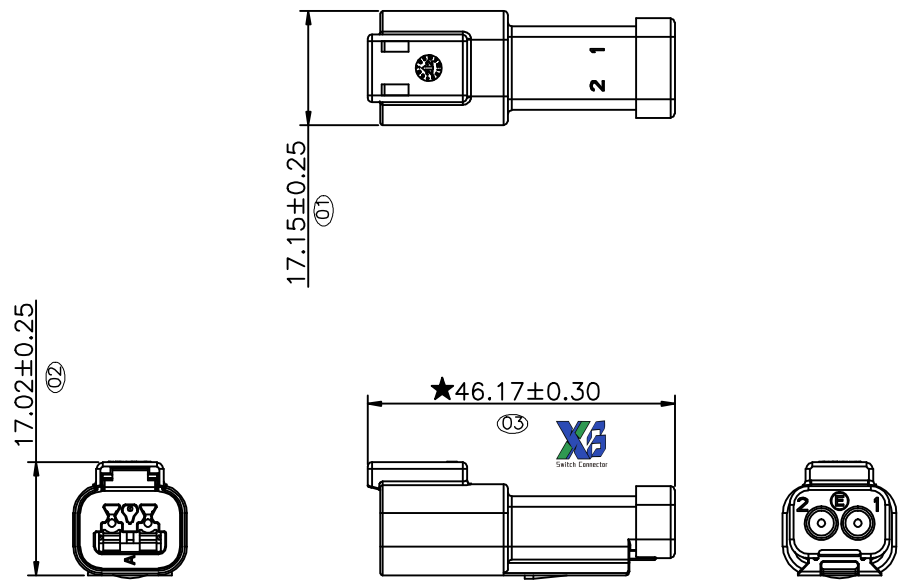




东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE	
X.±3.0°	X.±0.30
.X'±2.0°	.X±0.25
.XX'±1.0°	.XX±0.20
.XXX'±0.5°	.XXX±0.15

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
XB-AGZ021-02APA
PART NO.
XB-AGZ021-02APA

TITLE.
2 WAY RECEPTACLE,STANDARD SEAL EXTRA THIN SEAL,SHORT CAP SERIES