




INKJET CODE Description : XX X XX XX

XX-YEAR: 20 = 2020


X-MONTH: A = JAN, B = FEB,.....

XX-DAY: 14 = 14th DAY

XX-HOUR: 14 = 14 PM



INKJET CODE



Specifications

Current Rating 14 AWG: 13.0Amp AC/DC
16 AWG: 13.0Amp AC/DC
18 AWG: 10.0Amp AC/DC
20 AWG: 7.5Amp AC/DC

Voltage Rating: 250V AC/DC.

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:1500VAC

Contact Resistance:20mΩMax.

Operating Temperature:-55°C to +125°C

Materials

Insulator Material:High Temperature
Thermoplastic, UL 94V-0 PA66
or the equivalent material


★ All materials must meet Greenconn
hazardous substances control standards.

★: Critical Characteristics.

indicates product characteristics,
functionalities, and manufacturing processes
regarding to customer's specifications

★: Safety Features

indicates product characteristics,
functionalities, and manufacturing processes
complying to legal regulations stated by
local government

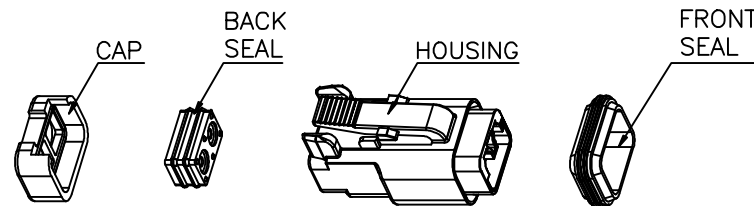

3RD.ANG
PROJ.



PAGE.
1/1

GENERAL TOLERANCE

X'±3.0'	X.±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

XB-AGZ091-02APA

PART NO.

XB-AGZ091-02APA

TITLE.

2 WAY PLUG
STANDARD SEAL
SHORT CAP DT SERIES