

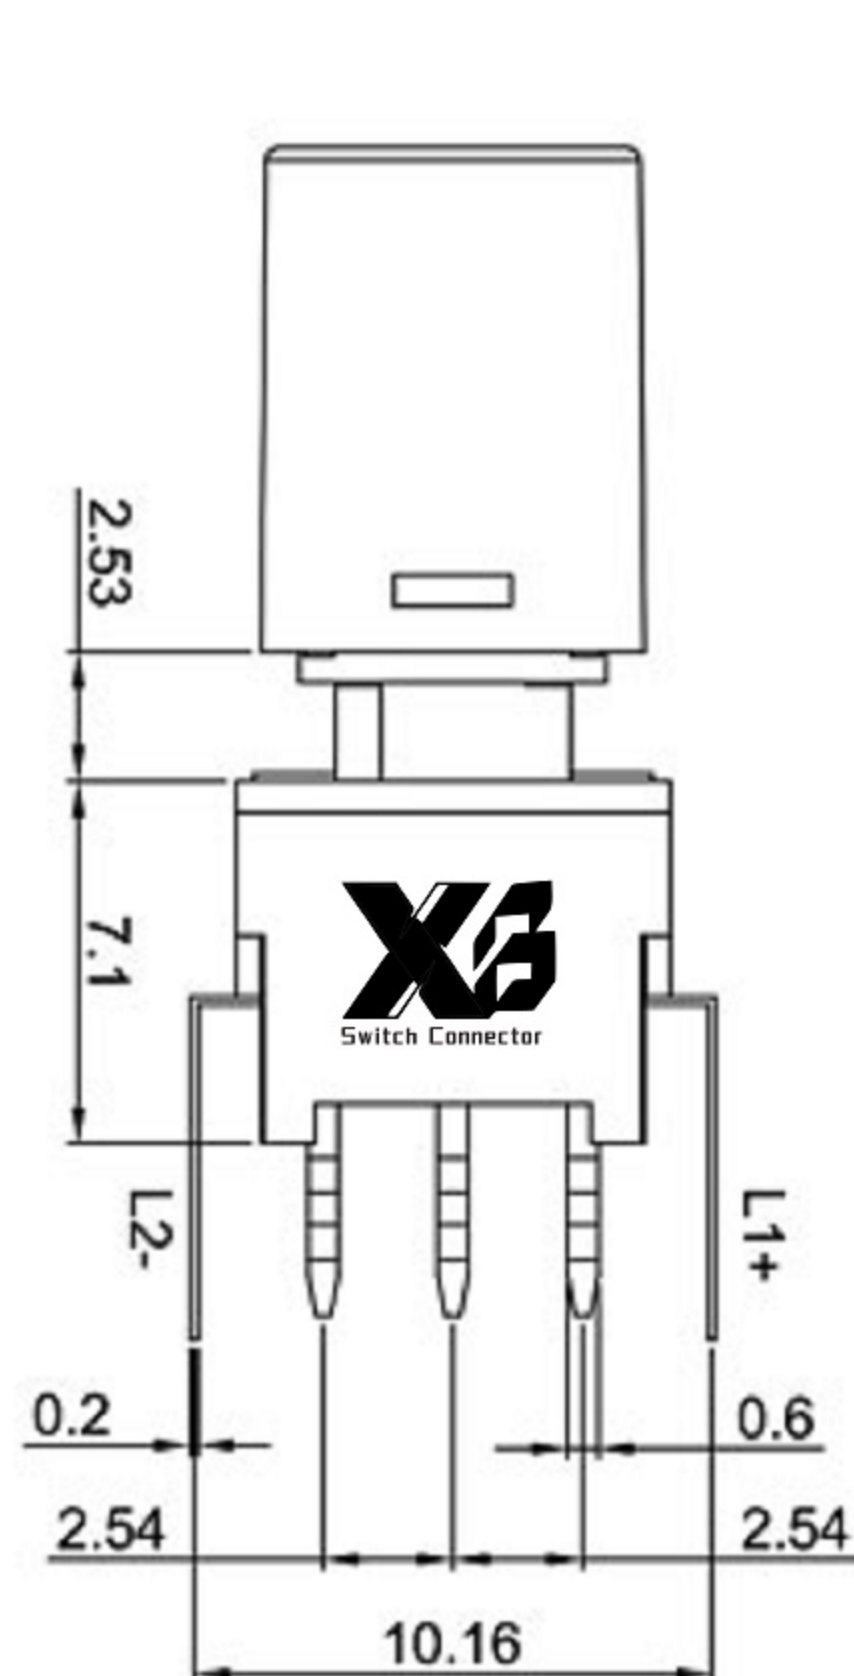



ROHS

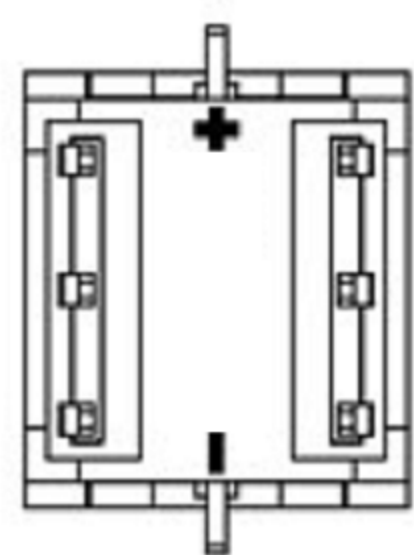

CIRCUIT

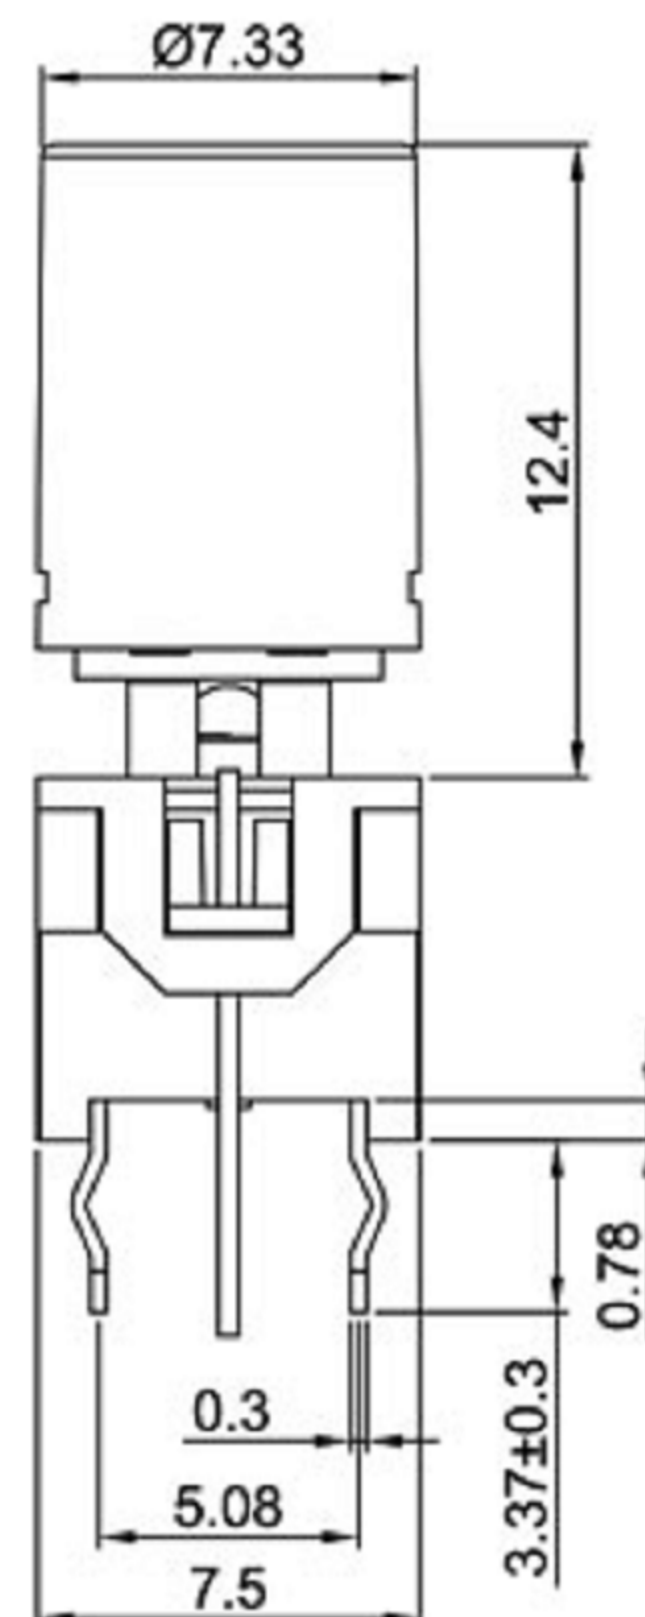

P.C.B. LAYOUT

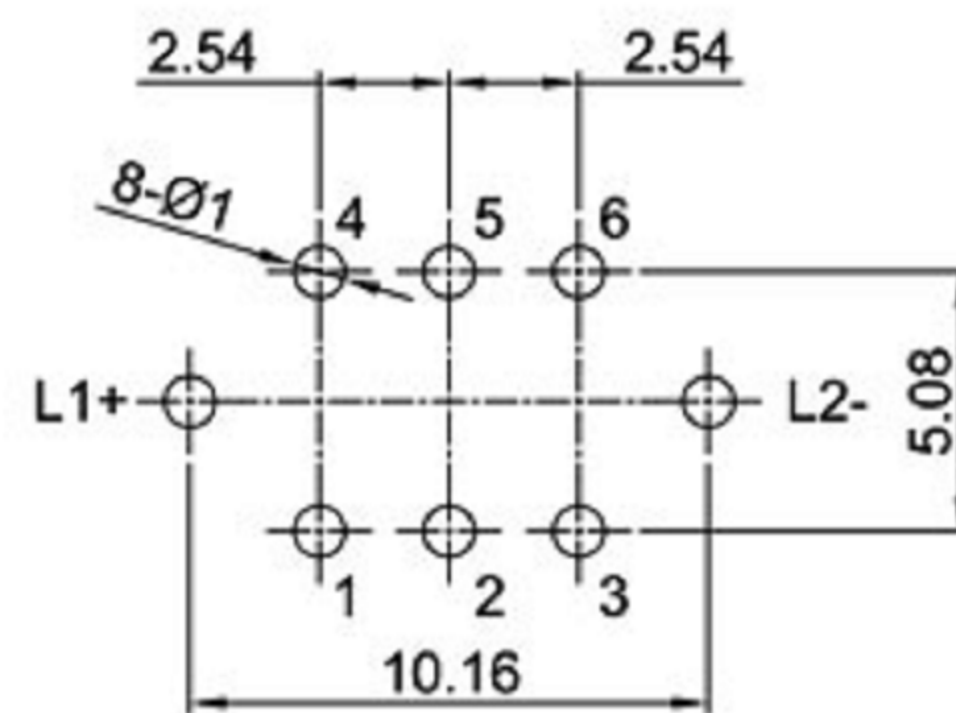

Type	Switch Action		Circuit
Lock	Normal ON	Push to lock ON	
Connected Terminals	1 - 2 4 - 5	2 - 3 5 - 6	
No Lock	Normal ON	Push to lock ON	
Connected Terminals	1 - 2 4 - 5	2 - 3 5 - 6	
LED Circuit			

RG	Red	红色
	Green	翠绿色
G	Green	绿色
W	White	白色
U	Blue	蓝色
Y	Yellow	黄色
O	Orange	橙色
R	Red	红色
灯发光颜色 X Emitted color X		



帶燈按鍵開關性能電氣

Circuit:DPDT 2P2T

Current Rating:0.3A 0.5A DC

Voltage Rating: 12V 30VDC

Dielectric withstanding voltage :250VAC ftor 1
minute

Contact Resistance: 100m0 Max . (intial)

Insulation Resistance:100MQ Min.

Operating Force: 250 ± 100

Total Travel: 2.5+0.2mm

Operating life:10,000 Cycles Min

Soldear Specifications: 260°C for 5 Seconds

Function: Momentary or self-lock

Openrating Temperature. :-20°C~+ 70°C

8				TOLERANCE UNLESS SPECIFIED					
7									
6				WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版		ZENQ. CHEN
5				OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Button Switch With Light		UNIT : mm	DRWG NO.: XB-LED-TB-018M	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-LED-TB-018M		SCALE: 5:1	DWN.	JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED				CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK	 东莞市溪榜电子有限公司			APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.				