

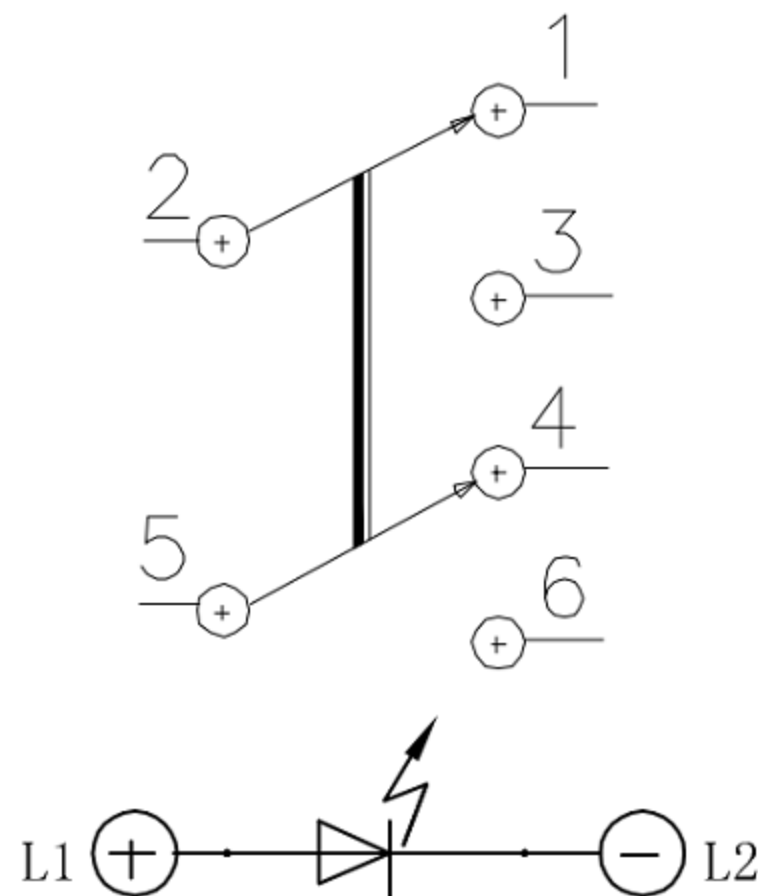
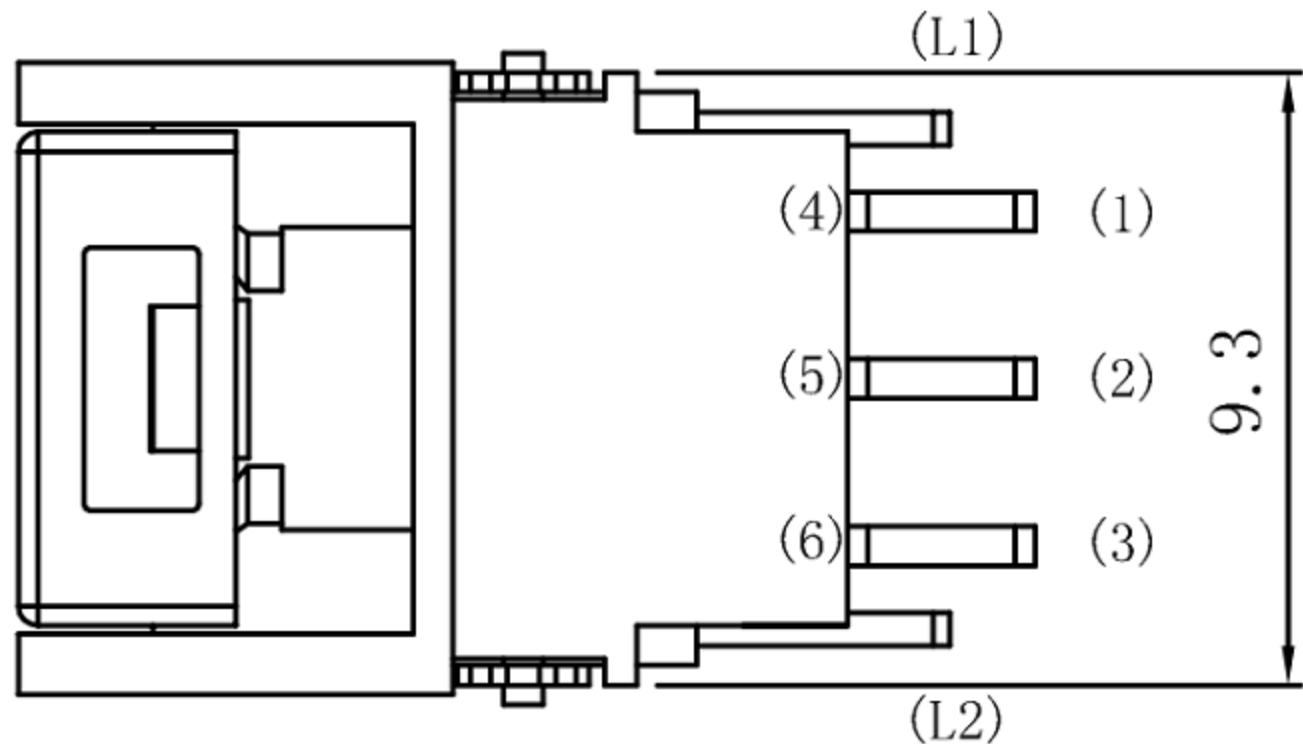
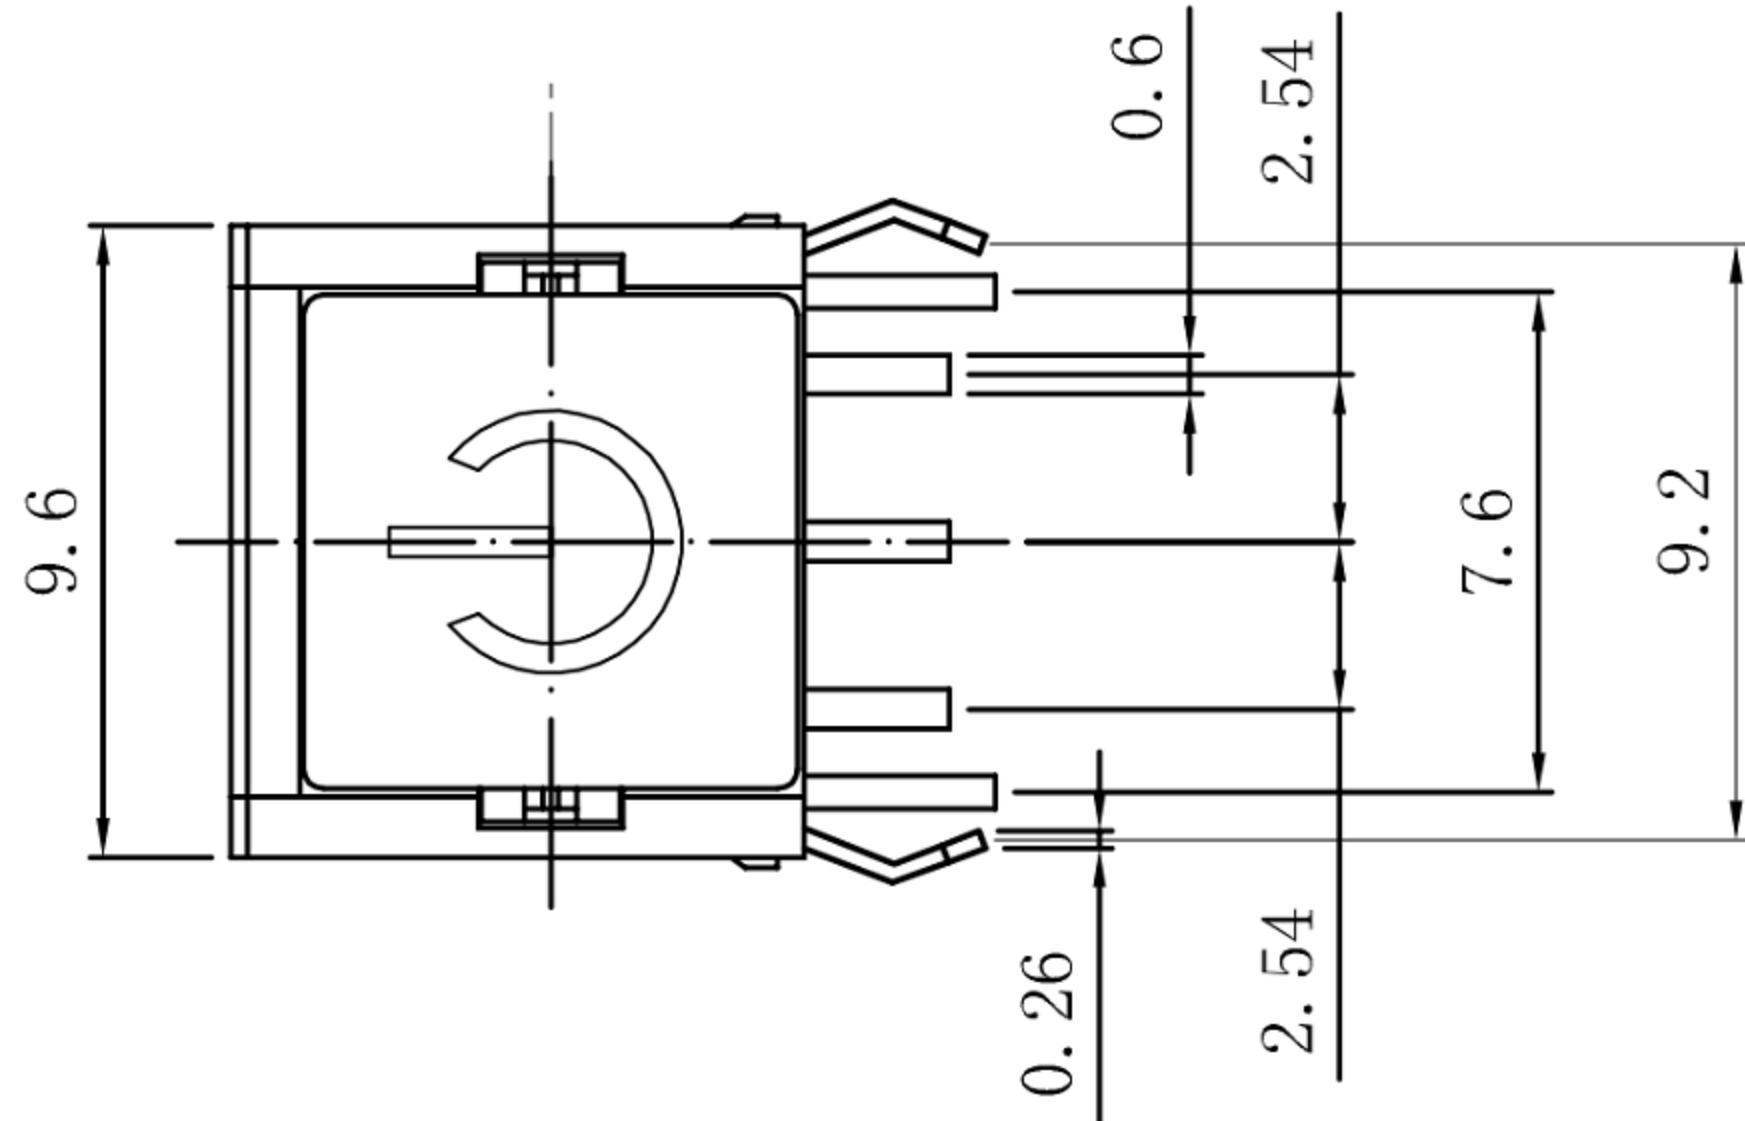


CAD FILE:

ROHS

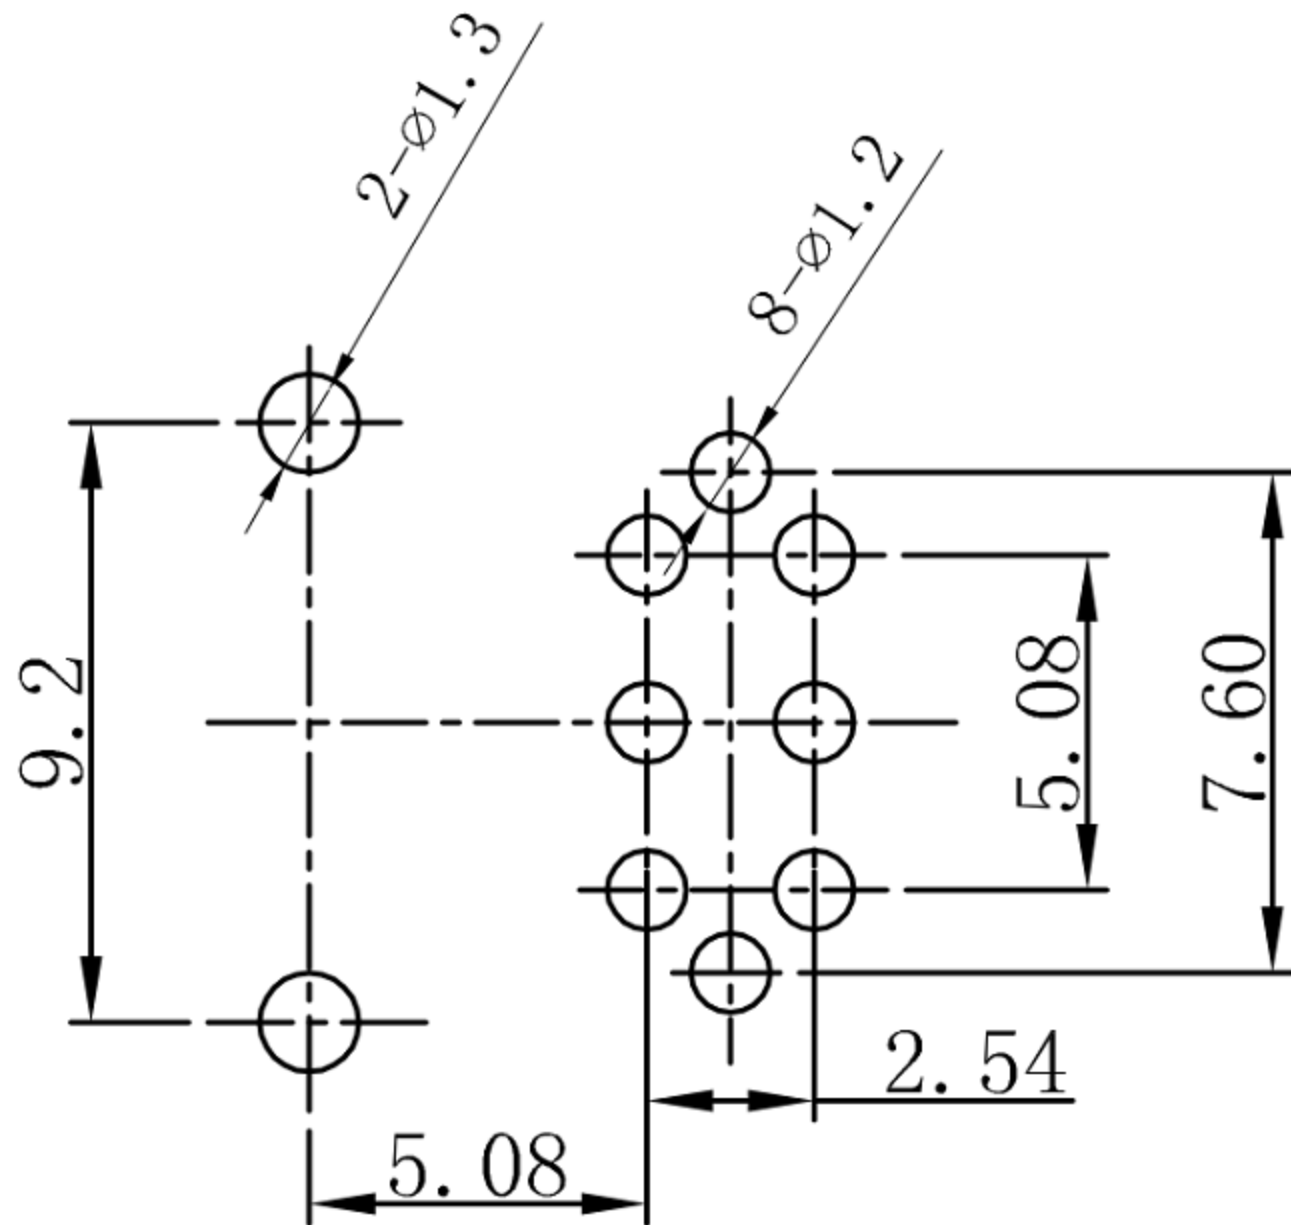

SCHEMATIC

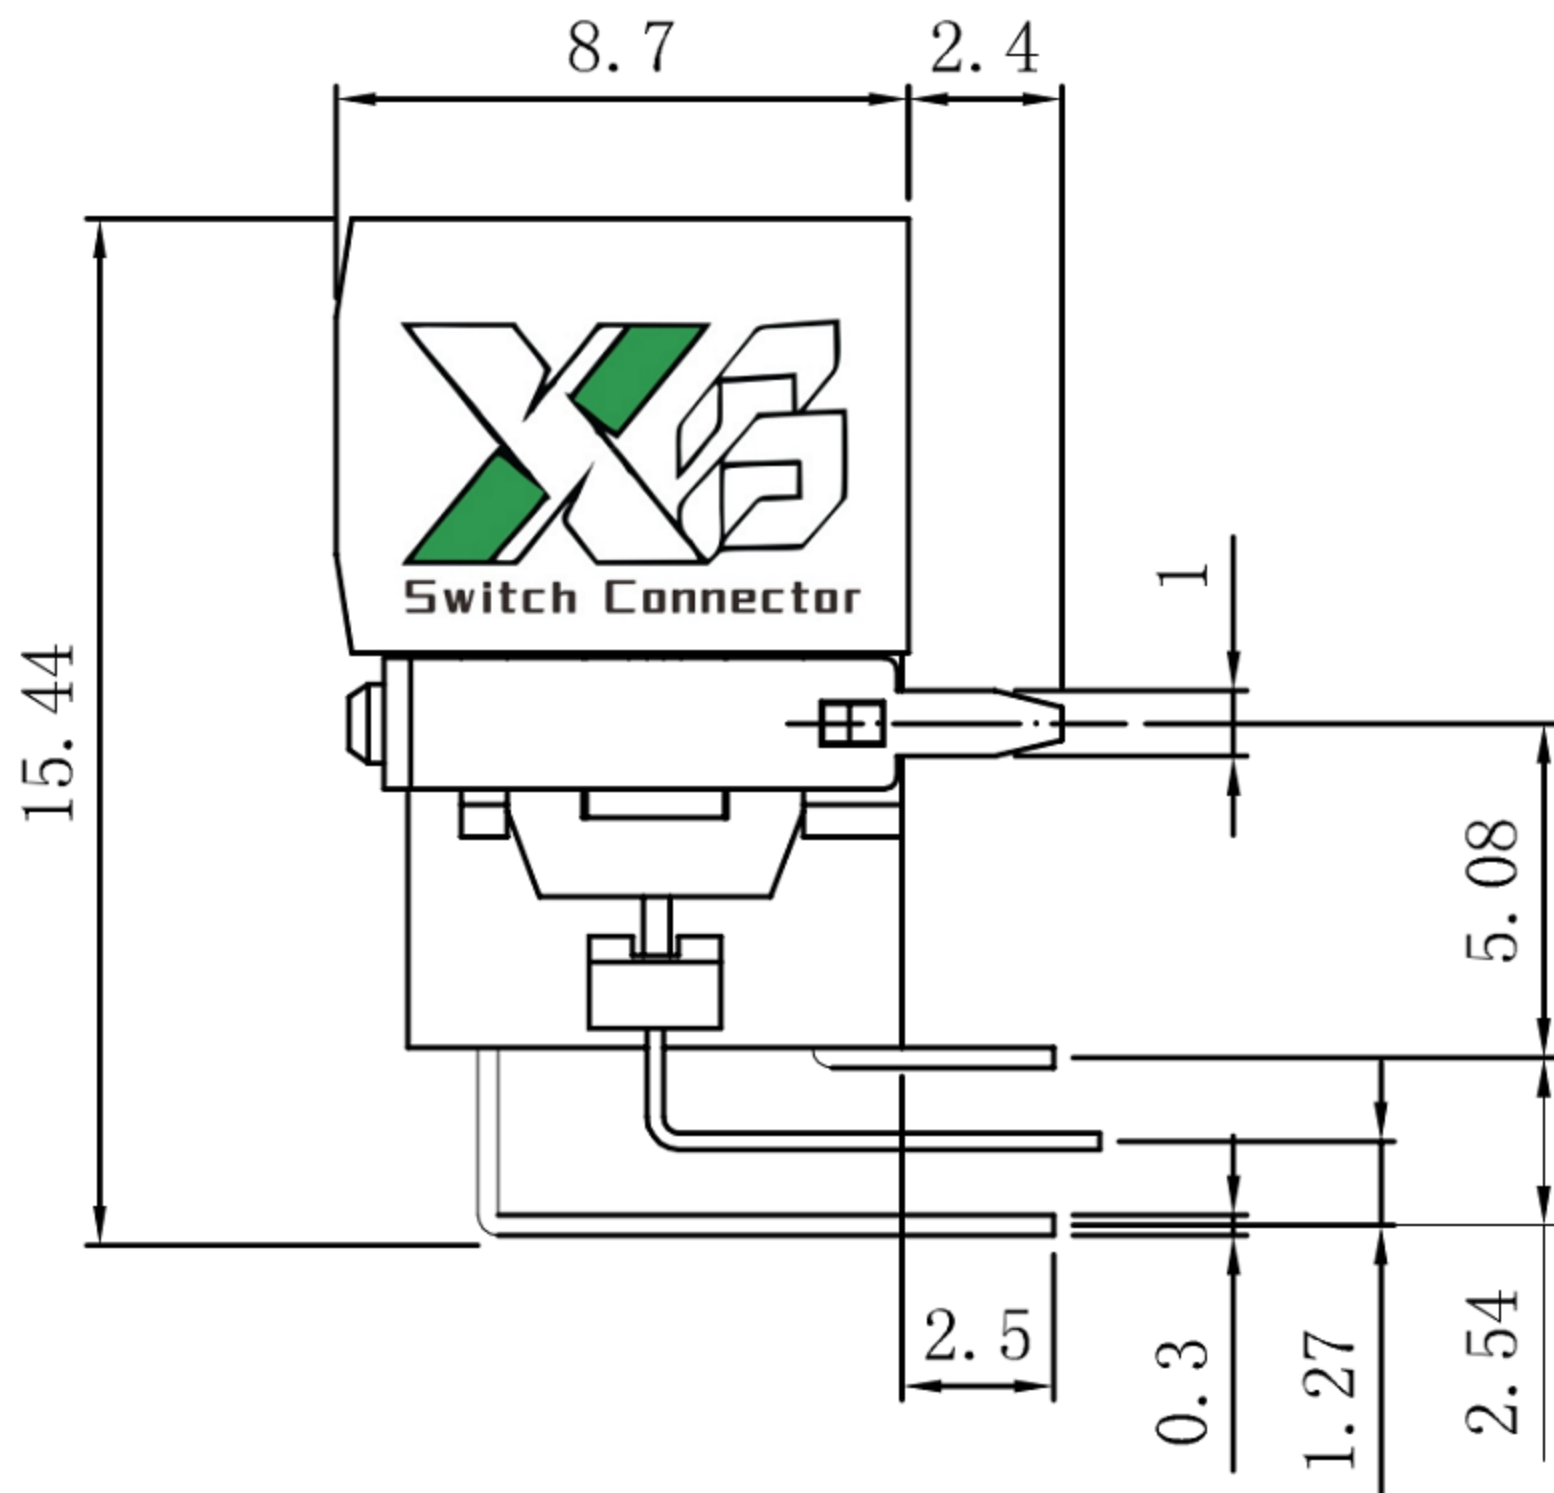

P. C. B LAYOUT

SPECIFICATIONS

- 2P2T , LOCK TYPE .
- RATING : 0.1A 30VDC MAX ; 0.1mA 5VDC MIN .
- CONTACT RESISTANCE : 70 mΩ , MAX .
- INSULATION RESISTANCE : 500 V DC , 100 MΩ , MIN .
- OPERATING TEMPERATURE : -20℃ ~ 70℃ .
- OPERATING FORCE : 300±100 gf .
- OPERATING LIFE 10,000 CYCLES .
- LED OPERATING CURRENT:20mA MAX.

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版	ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE :Button Switch With Light			UNIT : mm	DRWG NO.: XB-LED-TB-018W
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-LED-TB-018W			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					