
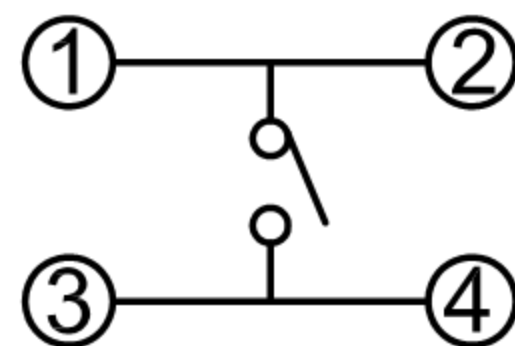
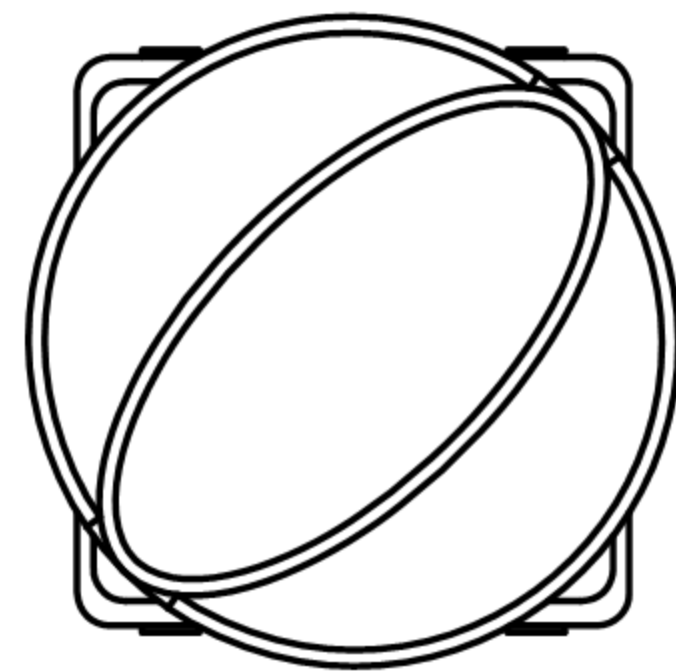
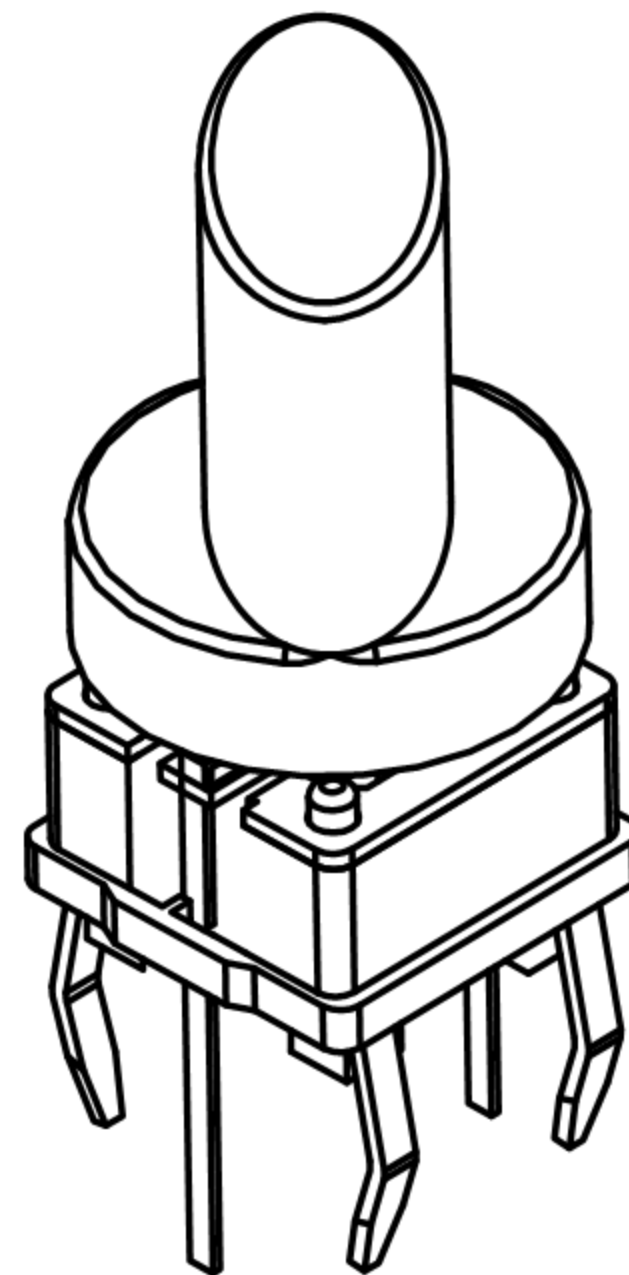
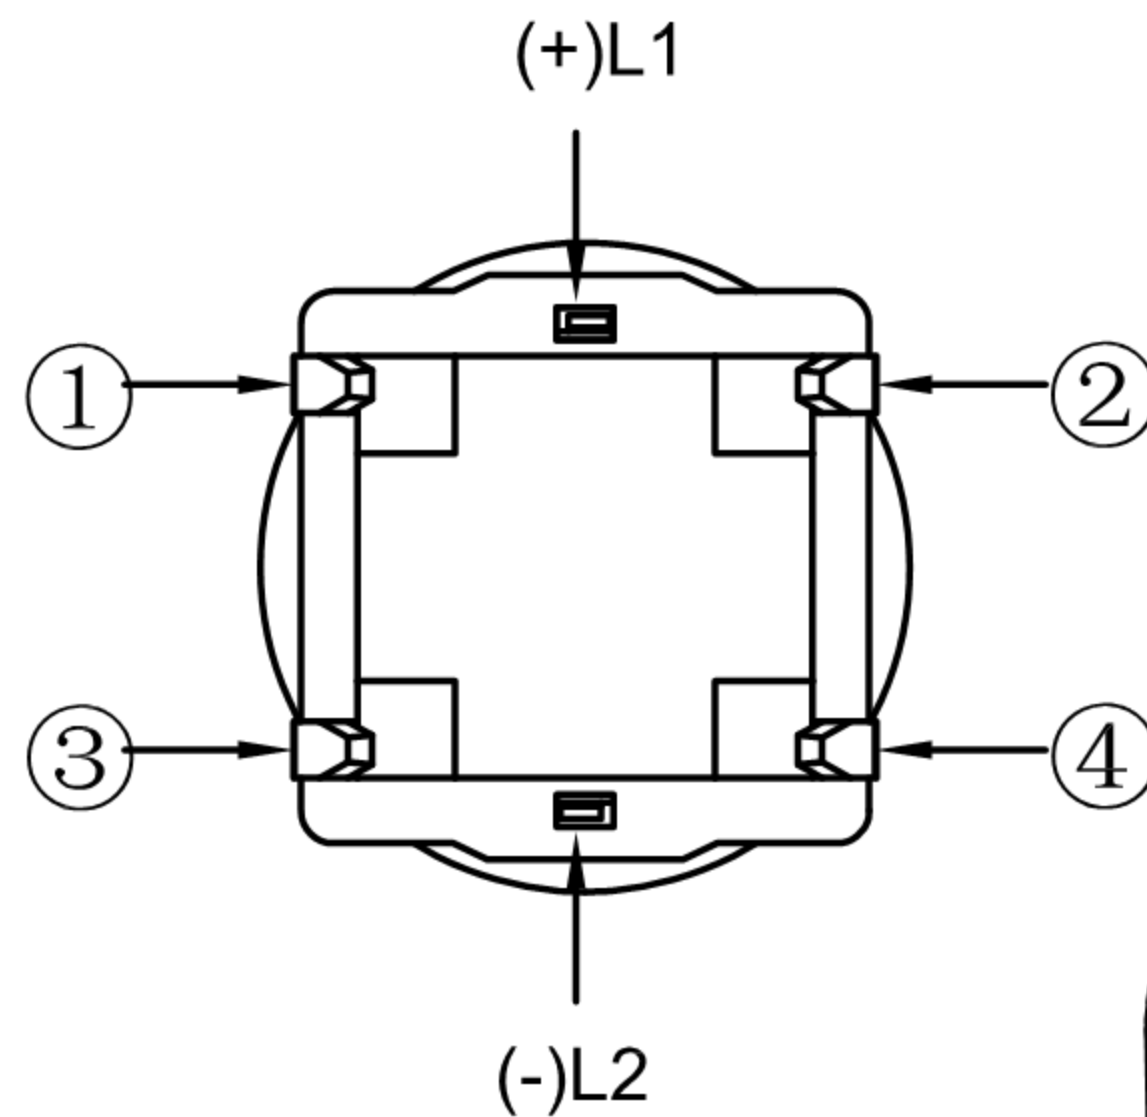
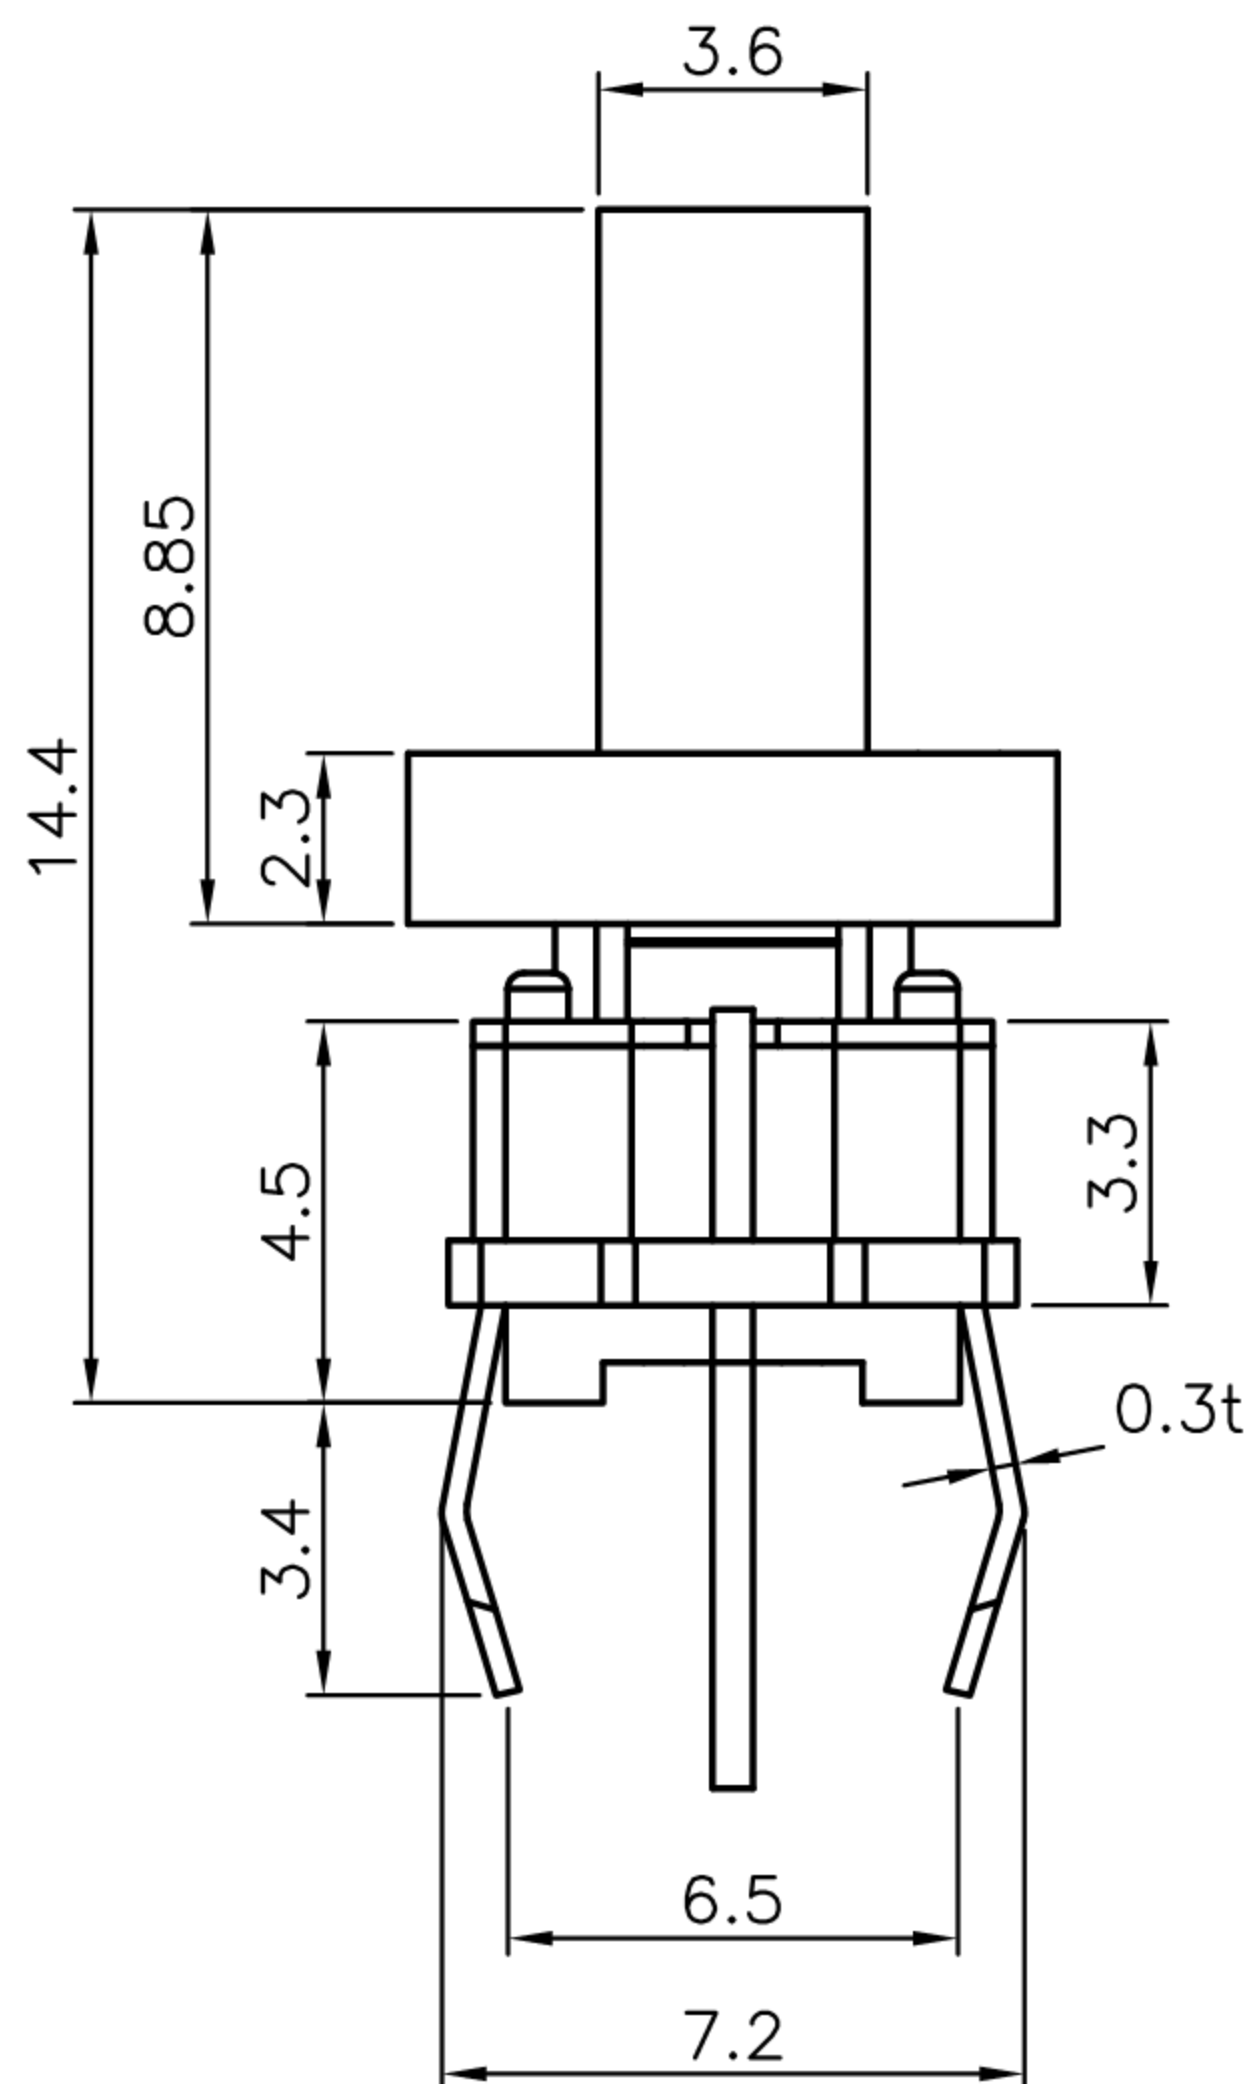



CAD FILE:

ROHS

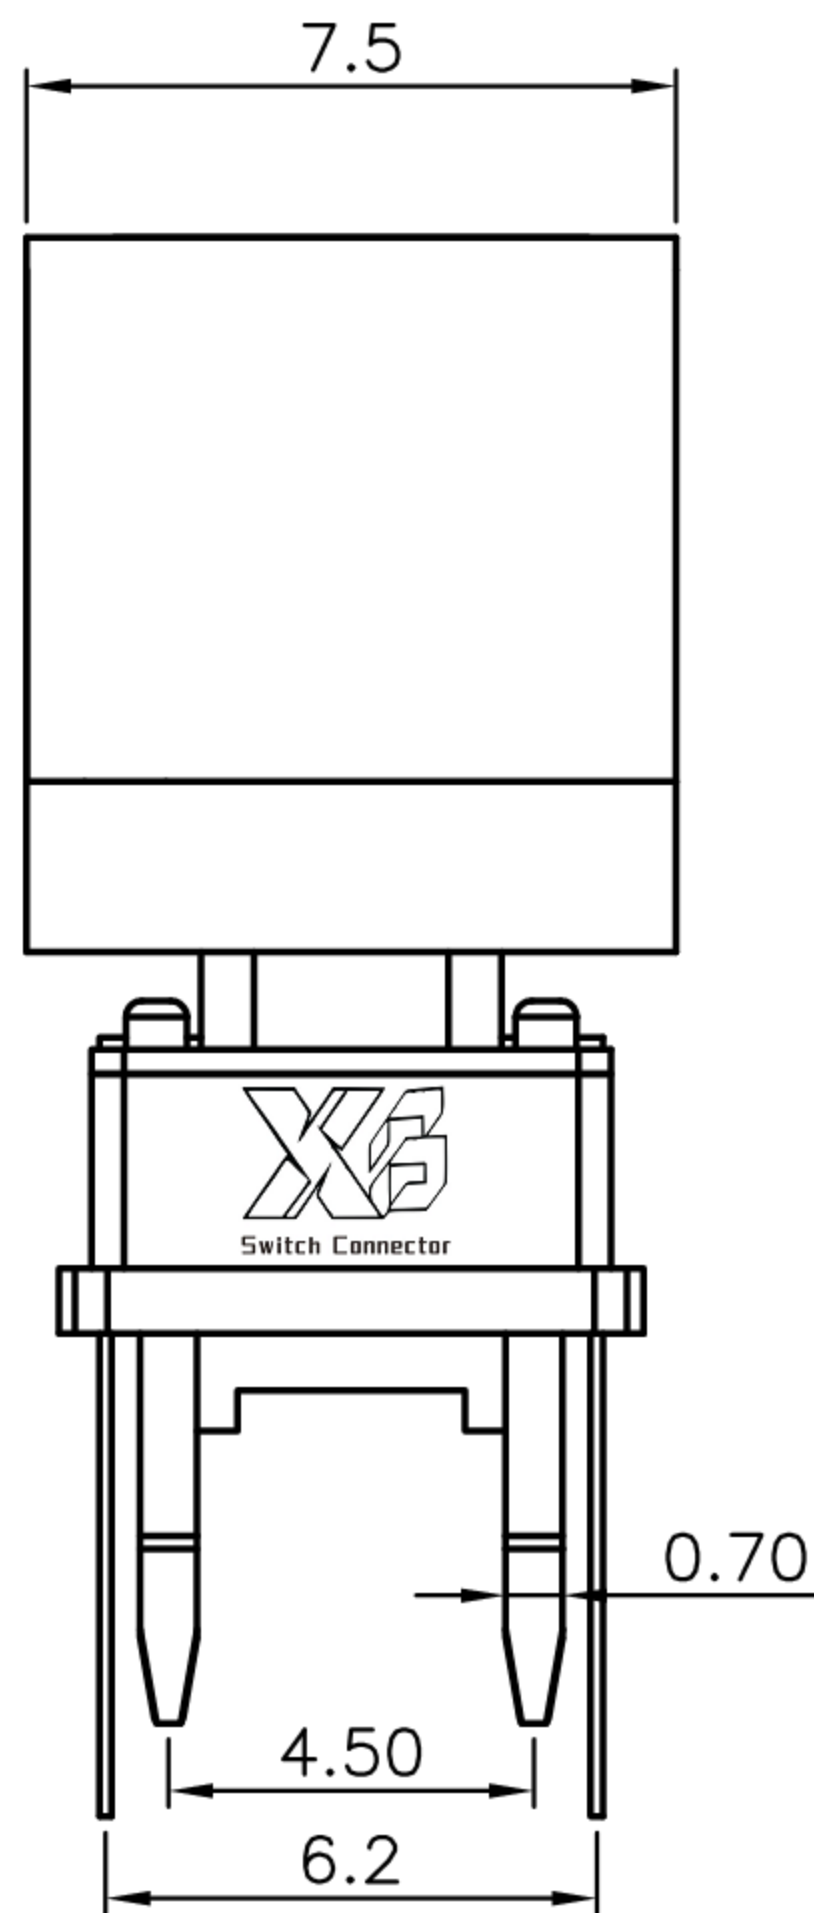

CIRCUIT L1 ⊕ → LED → ⊖ L2

P.C.B LAYOUT

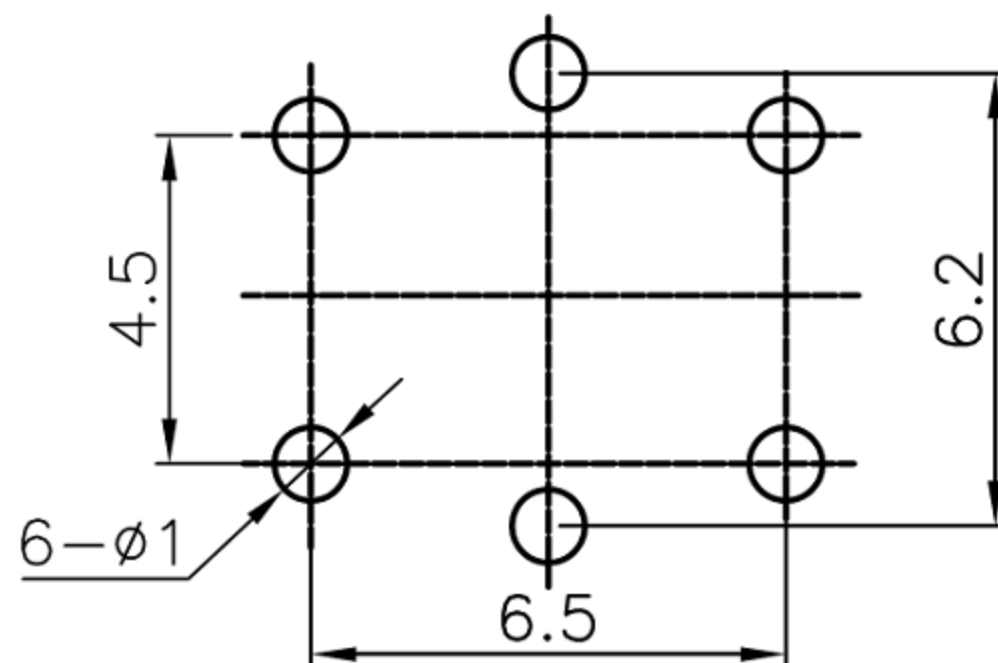

NOTES:

Electrical Characteristics:

Rating : 50mA 12VDC

Contact Resistance: 50mΩ max. (Initial)

Insulation Resistance: 100MΩ min. (at 250 VDC)

Dielectric Strength: AC 250V(50/60Hz) for 1 minute.

LED Operating Current: 20mA max.

Mechanical Characteristics:

Operating Force: 160±50gf

Travel: 0.25±0.1mm

Static load : 3Kg / 60 sec

Operating Life: 100,000 cycles min.

Operating temperature: -20°C to 70°C.

LED COLOR (X)										
1	2	3	4	5	6	23	13	12	52	、 、
Red	Yellow	Green	Blue	White	Pure green	Yellow Green	Red Green	Red Yellow	White Yellow	、 、

NO.	PART NAME	MATERIAL	QTY.	REMARKS
1	CAP	PC	1	
2	BUTTON	NYLON	1	
3	COVER	PET	1	
4	HOUSING	NYLON	1	
5	LED	GaASP/GaP	1	
6	CONTACT	STAINLESS STEEL METAL	1	CONTACT SIDE SILVER PLATING
7	TERMINAL	H65(C2680)	4	Ag PLATED

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版		ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE Light Tact Switch MODEL: XB-TS-LED-03  东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.	UNIT : mm		DRWG NO.: XB-TS-LED-03		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED		SCALE: 5:1		DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED		CHK'D		DONG. PANG		2012-9-25
1	KNOB	PPA	1	BLACK		APPD.		ZENQ. CHEN		2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH						