

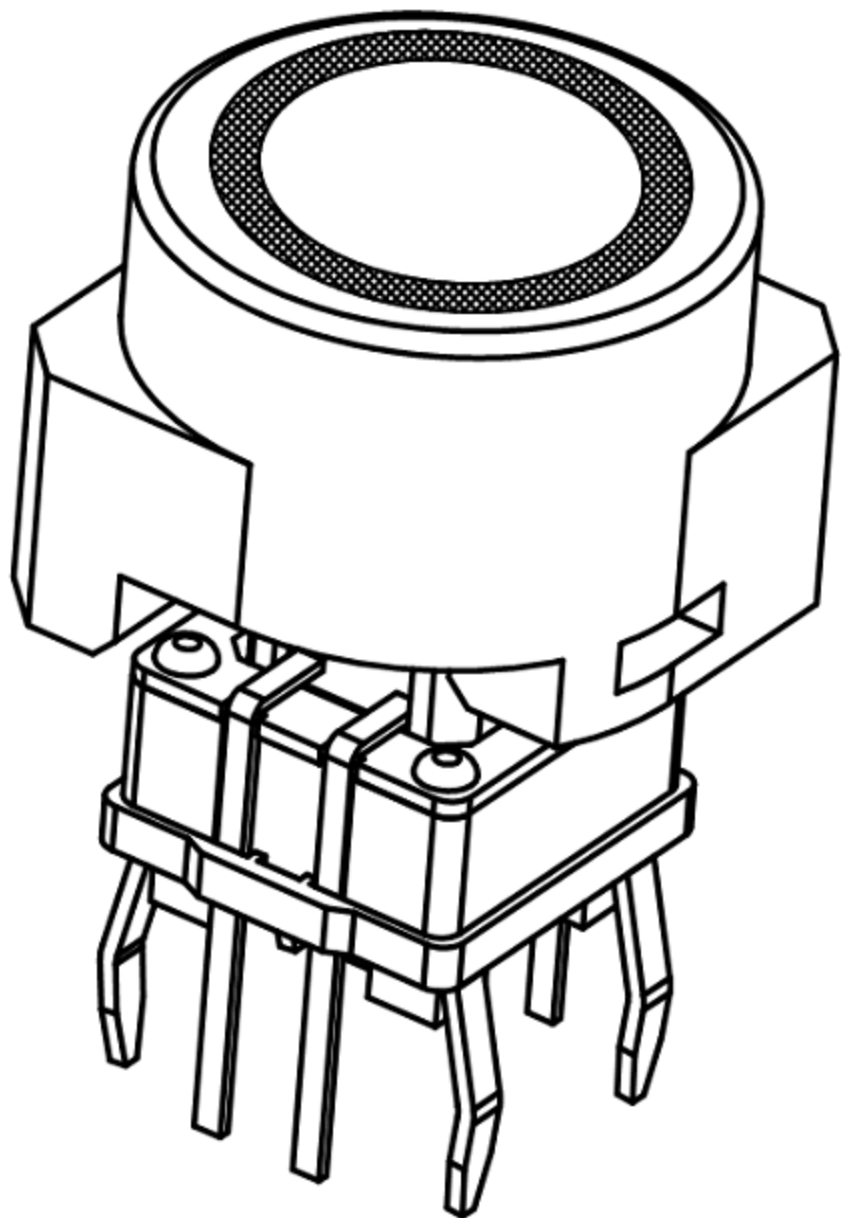
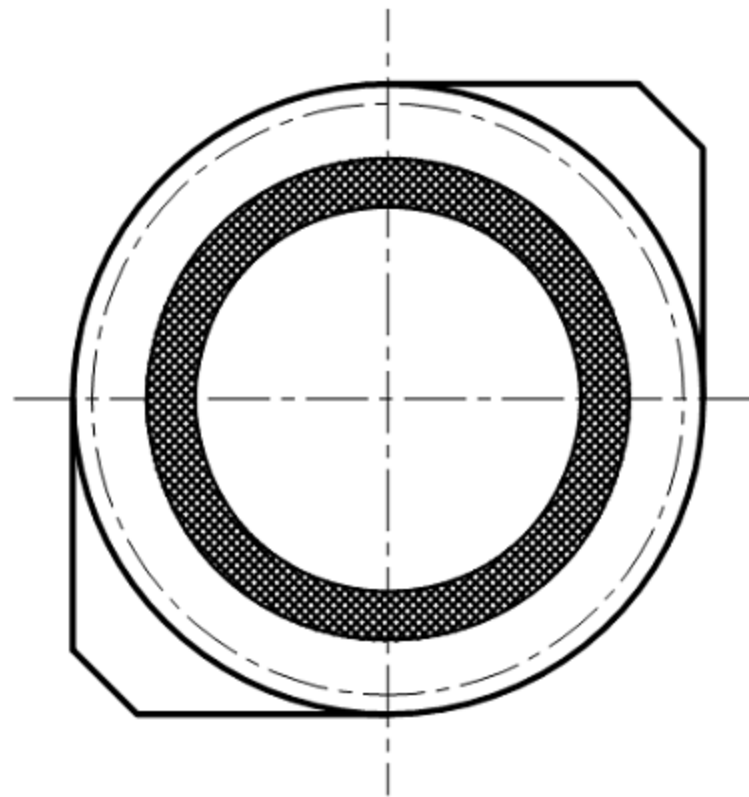


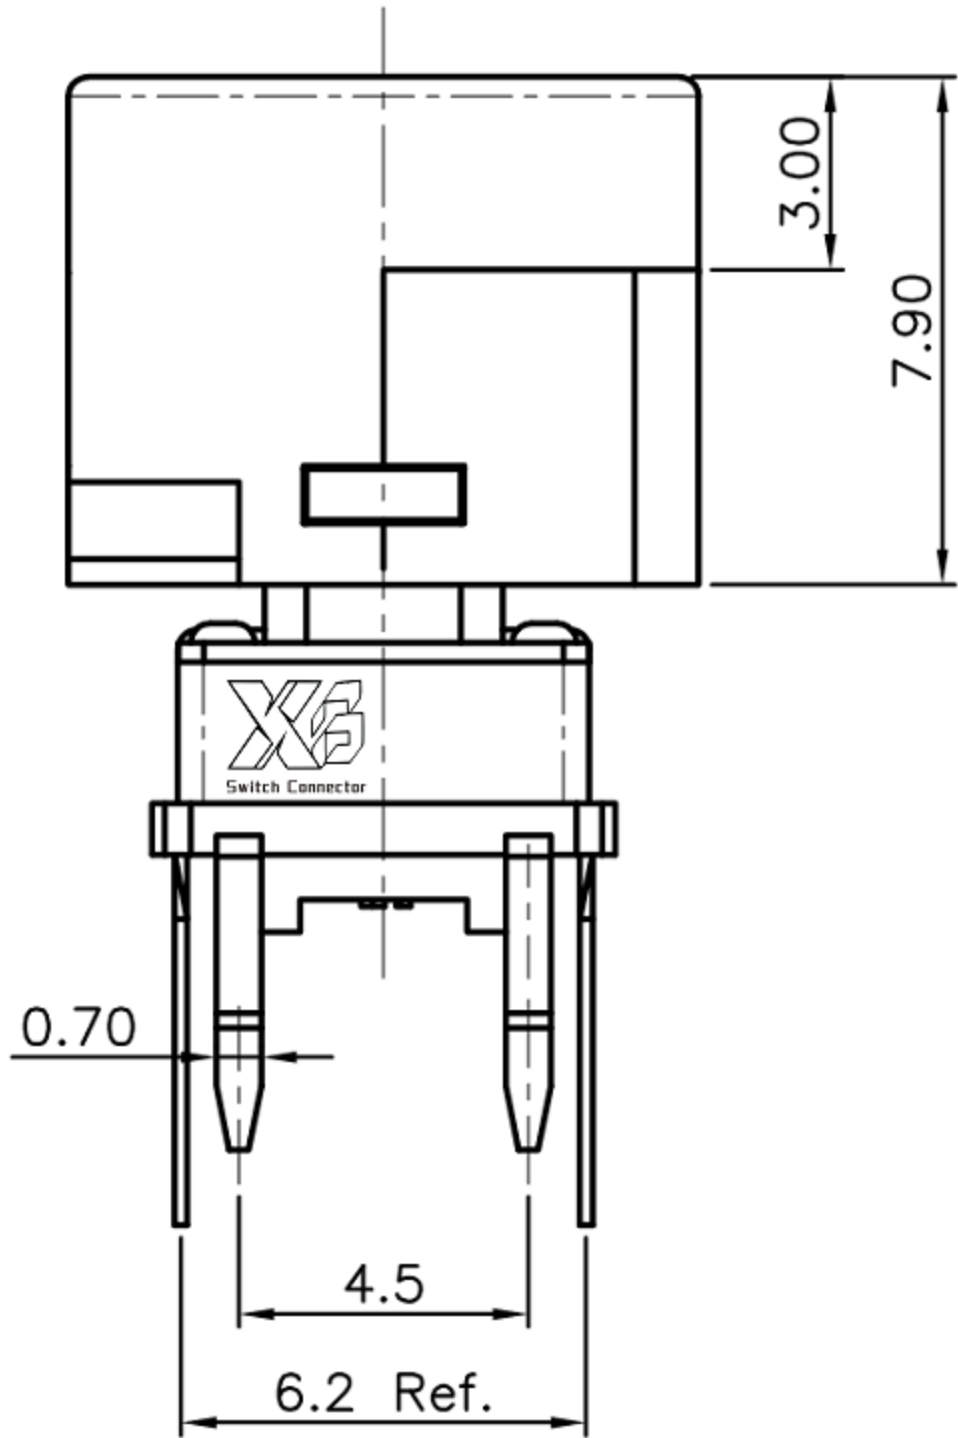

CAD FILE:

ROHS

DOT SHOWING LED
COLOR IS MARKED
FOR MINUS POLE
SEE SCHEMATIC

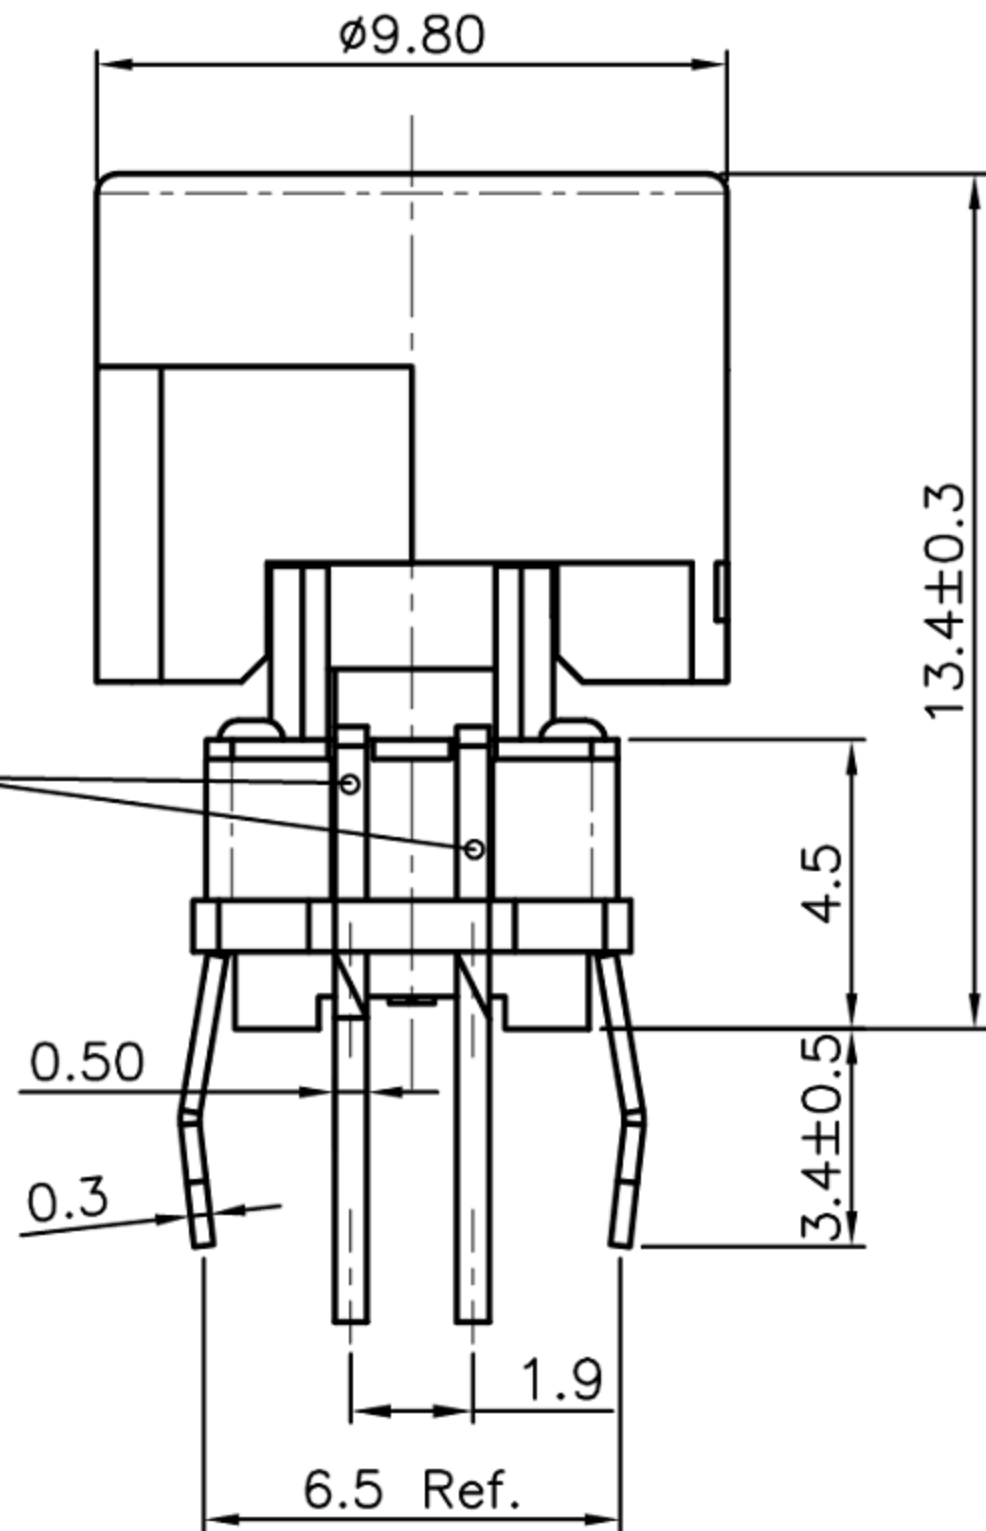




NOTES:

Electrical Characteristics:

Rating : 50mA 12VDC
Contact Resistance: 50mΩ max. (Initial)
Insulation Resistance: 100MΩ min. (at 250 VDC)
Dielectric Strength: AC 250V(50/60Hz) for 1 minute.
LED Operating Current: 20mA max.

Mechanical Characteristics:

Operating Force: 160±50gf
Travel: 0.25±0.1mm
Static load : 3Kg / 60 sec
Operating Life: 100,000 cycles min.
Operating temperature: -20°C to 70°C.

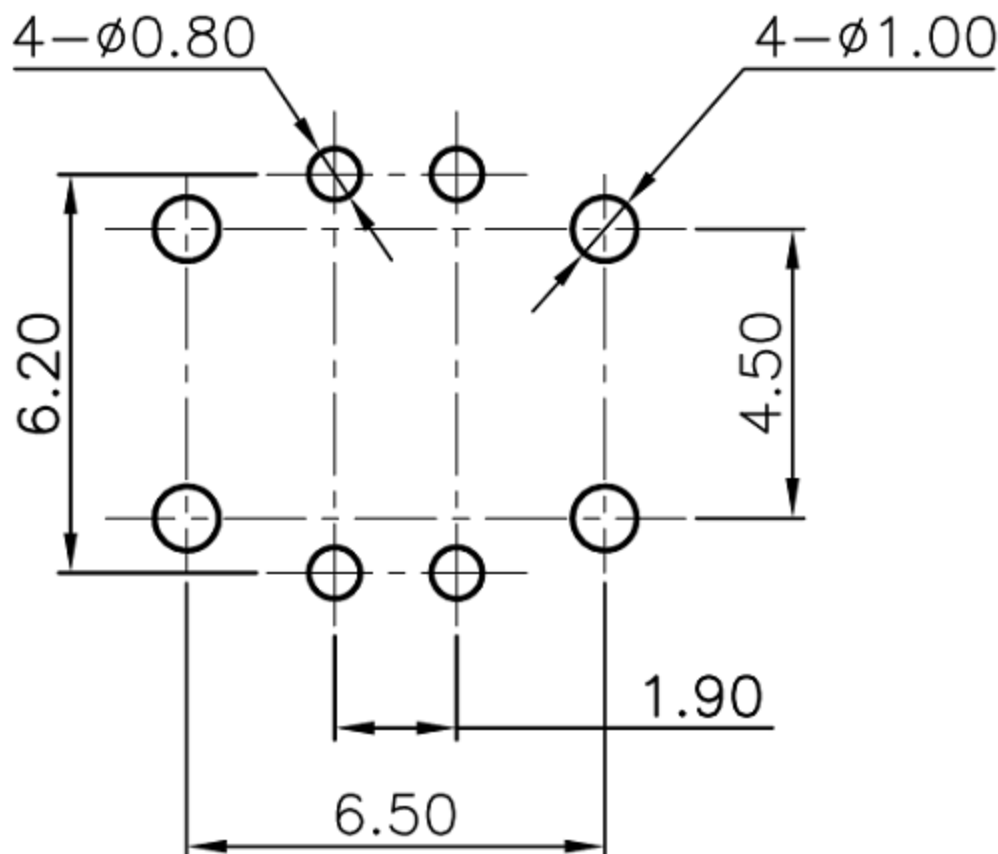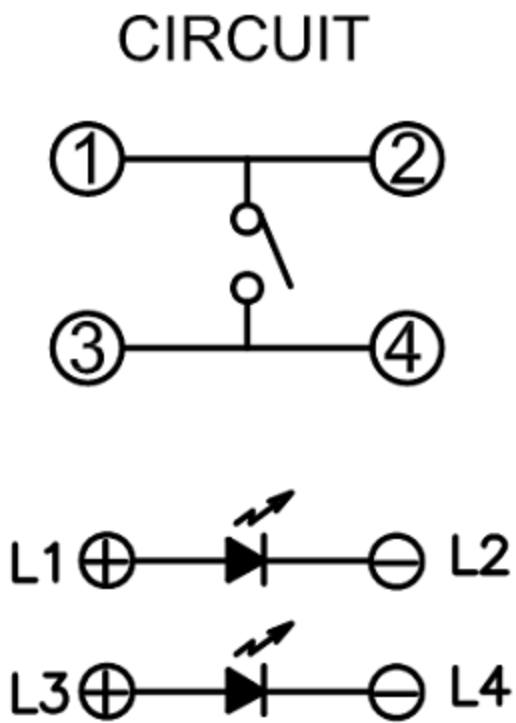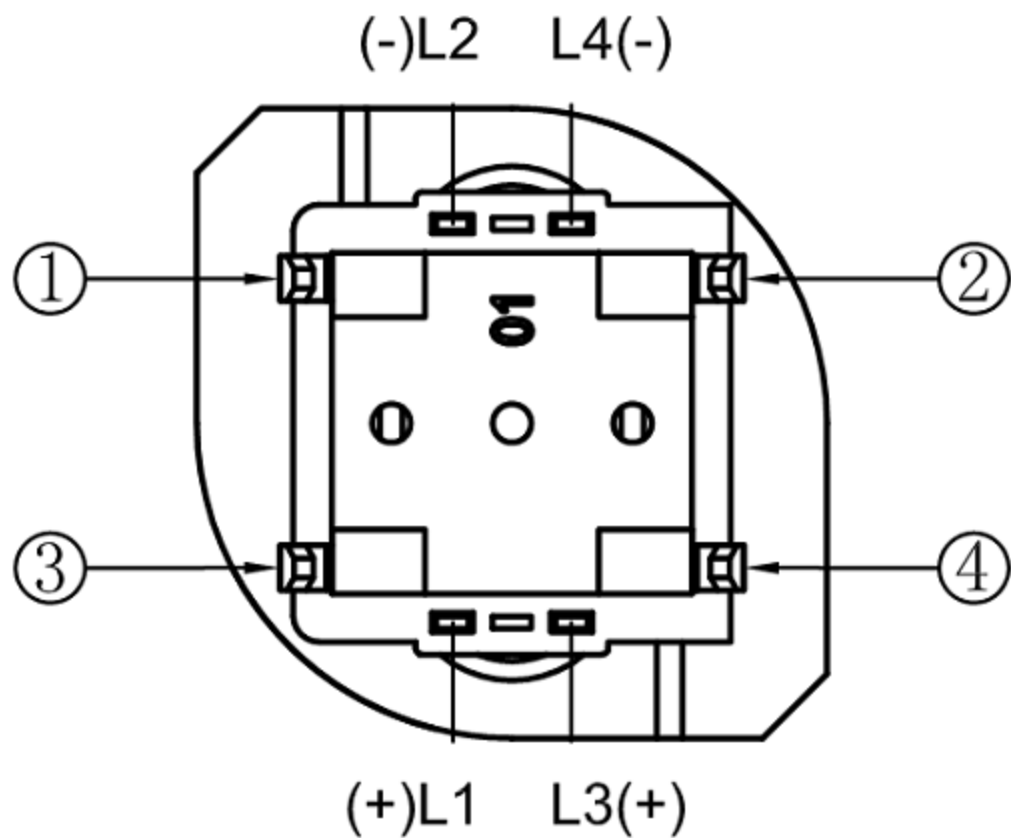

P.C.B LAYOUT

LED COLOR (X)										
1	2	3	4	5	6	23	13	12	52	、 、
Red	Yellow	Green	Blue	White	Pure green	Yellow Green	Red Green	Red Yellow	White Yellow	、 、

8					TOLERANCE UNLESS SPECIFIED							
7												
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版		ZENQ. CHEN		
5						ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.		
4	CONTACT	SUS	1	Ag CLAD	TITLE Light Tact Switch			UNIT : mm	DRWG NO.: XB-TS-LED-04			
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				MODEL: XB-TS-LED-04			SCALE: 5:1	DWN.
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司						CHK'D	
1	KNOB	PPA	1	BLACK				DONG GUAN XI BANG ELECTRONI CS CO., LTD.			APPD.	
NO.	PARTS	MATERIALS	Q'TY	FINISH								