

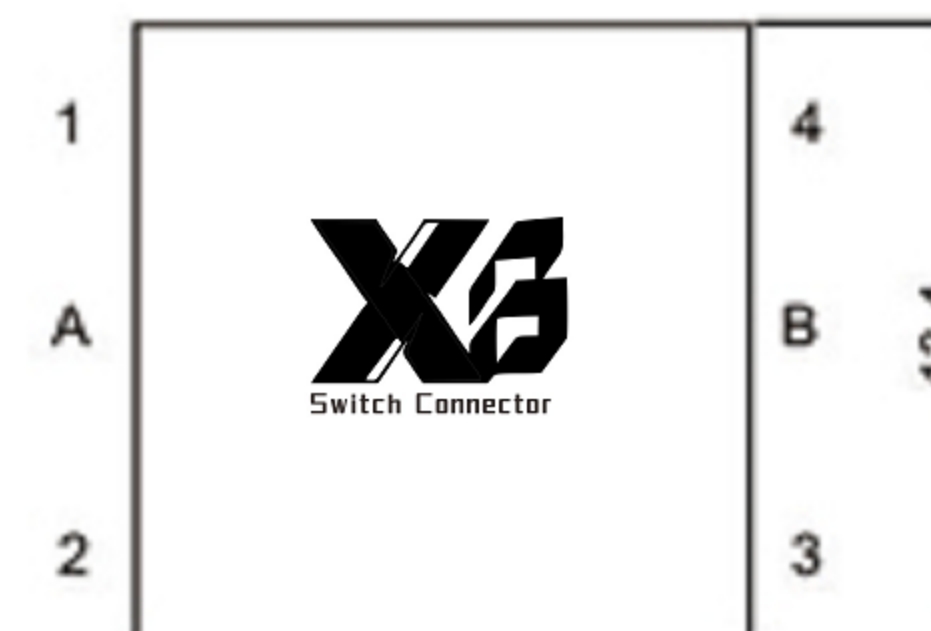
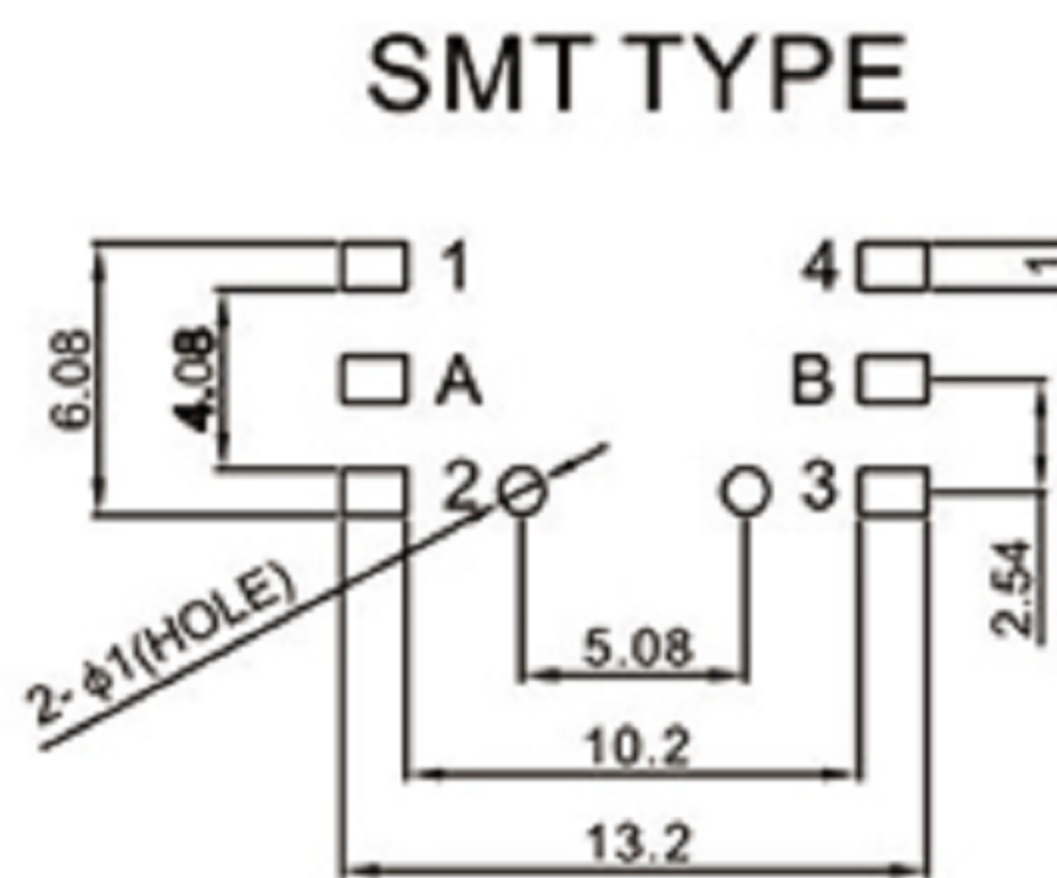


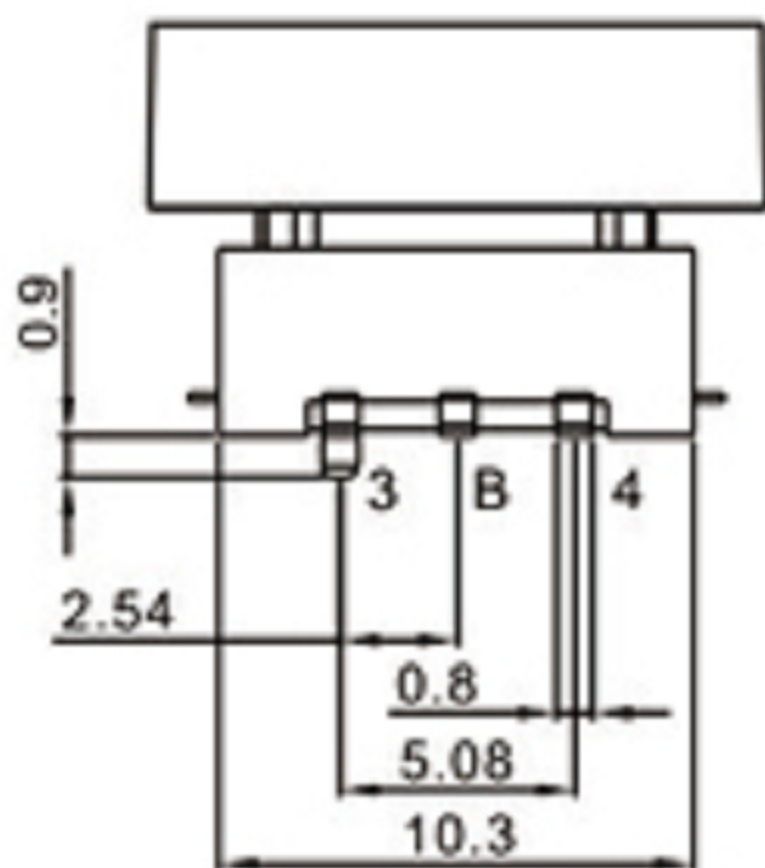


CAD FILE:


ROHS

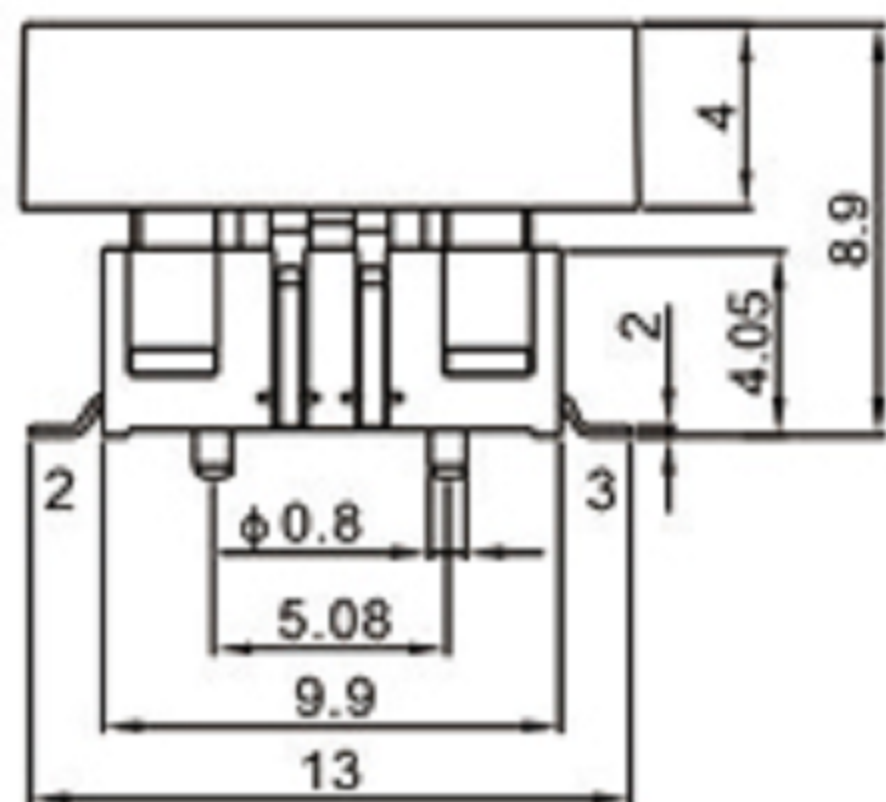


SINGLE COLOR

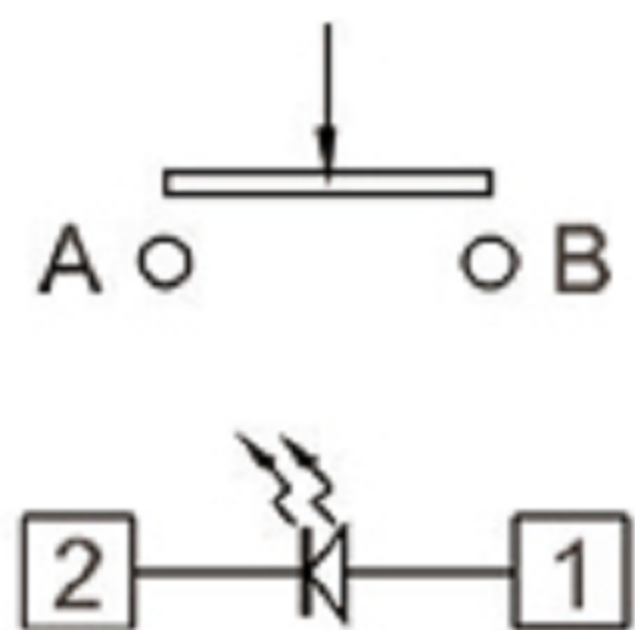

TWO COLOR

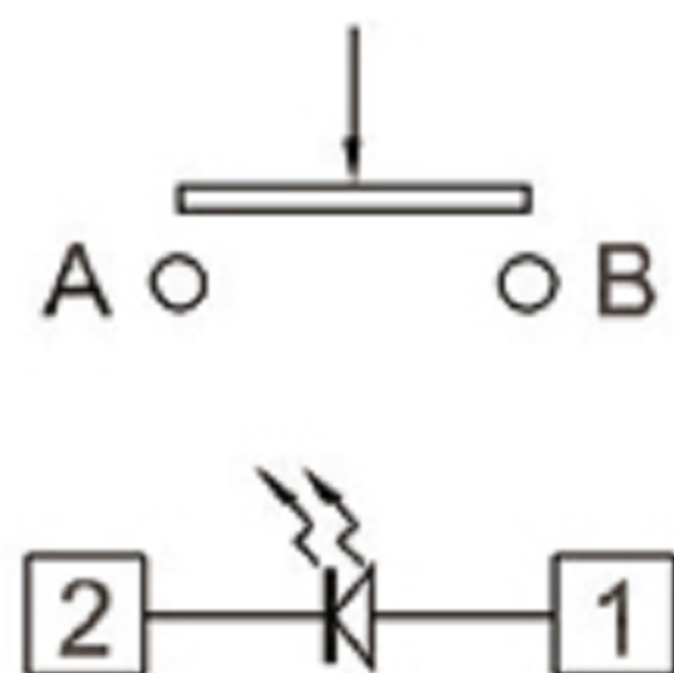

RGB COLOR

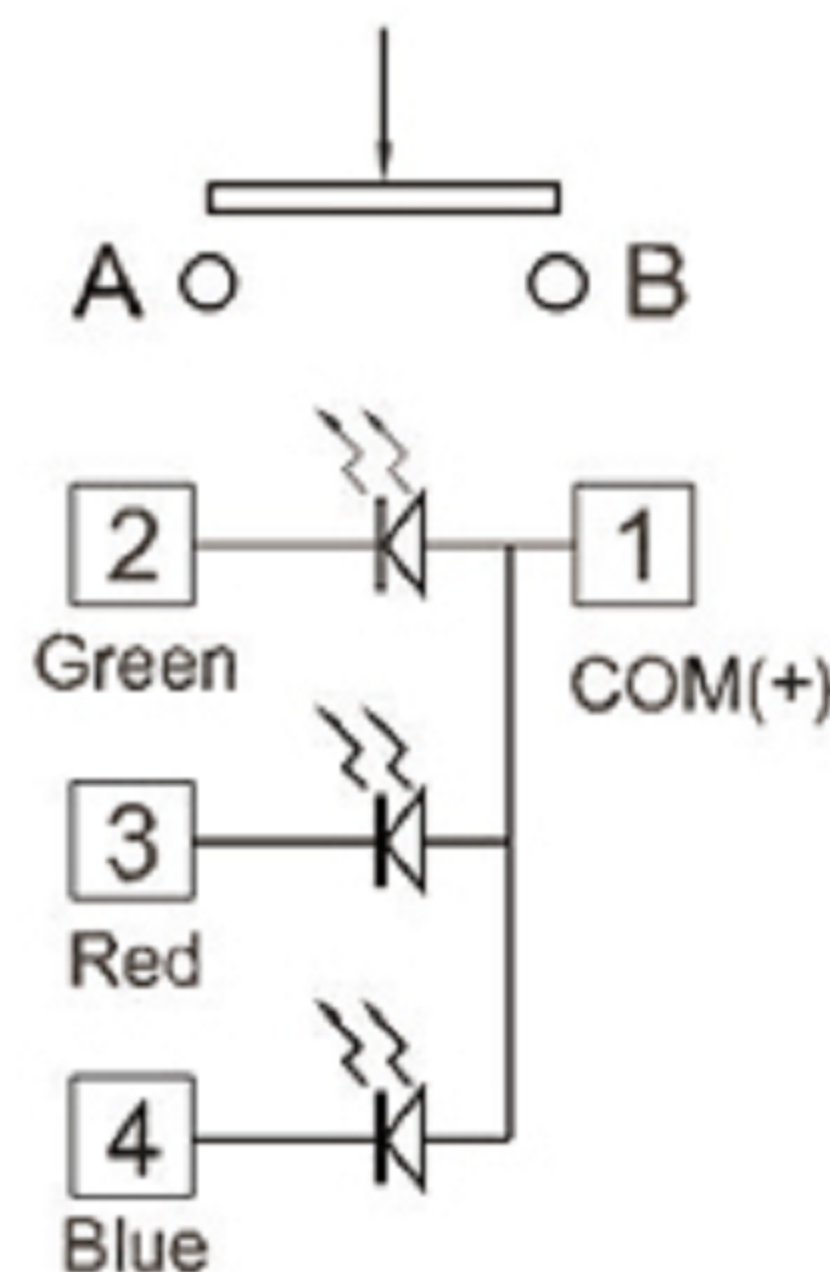

产品规格:

Circuit:SPST 1P1T with LED

Current Rating:50mA

Voltage Rating:12VDC

Dielectric withstanding voltage :250VAC for 1 minute

Contact Resistance:100mS Max(intial)

Insulation Resistance:1 00MQ Min

Operating Force:250+50gf

Total Travel:0.4+0.1 5mm

Opearating life:200,000 Cycles Min

Soldear Specifications:260°C for 3 Seconds

Function:Momentary

Openrating Temperature:-20°C~+70°C

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Light Touch Switch			UNIT : mm	DRWG NO. XB-TS-LED-1304N
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.				