

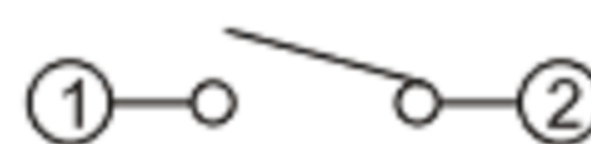


CAD FILE:

ROHS

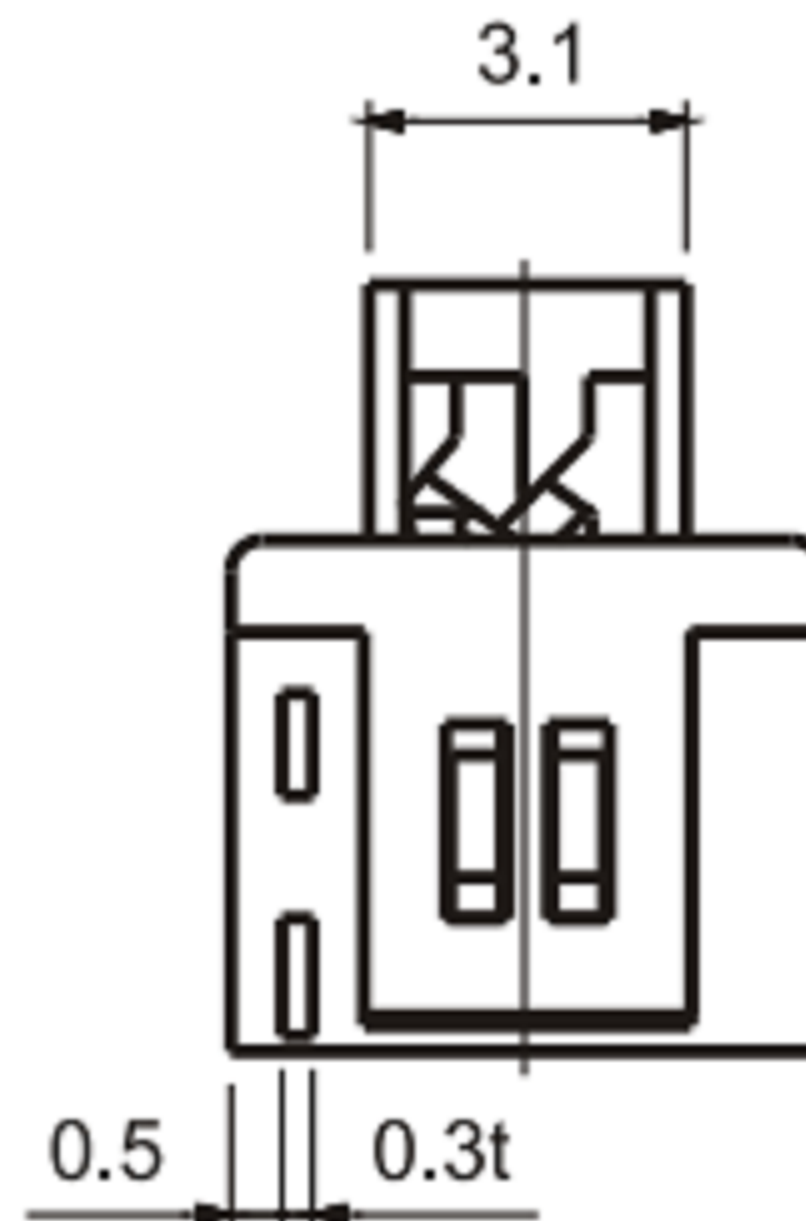

CIRCUIT DIAGRAM

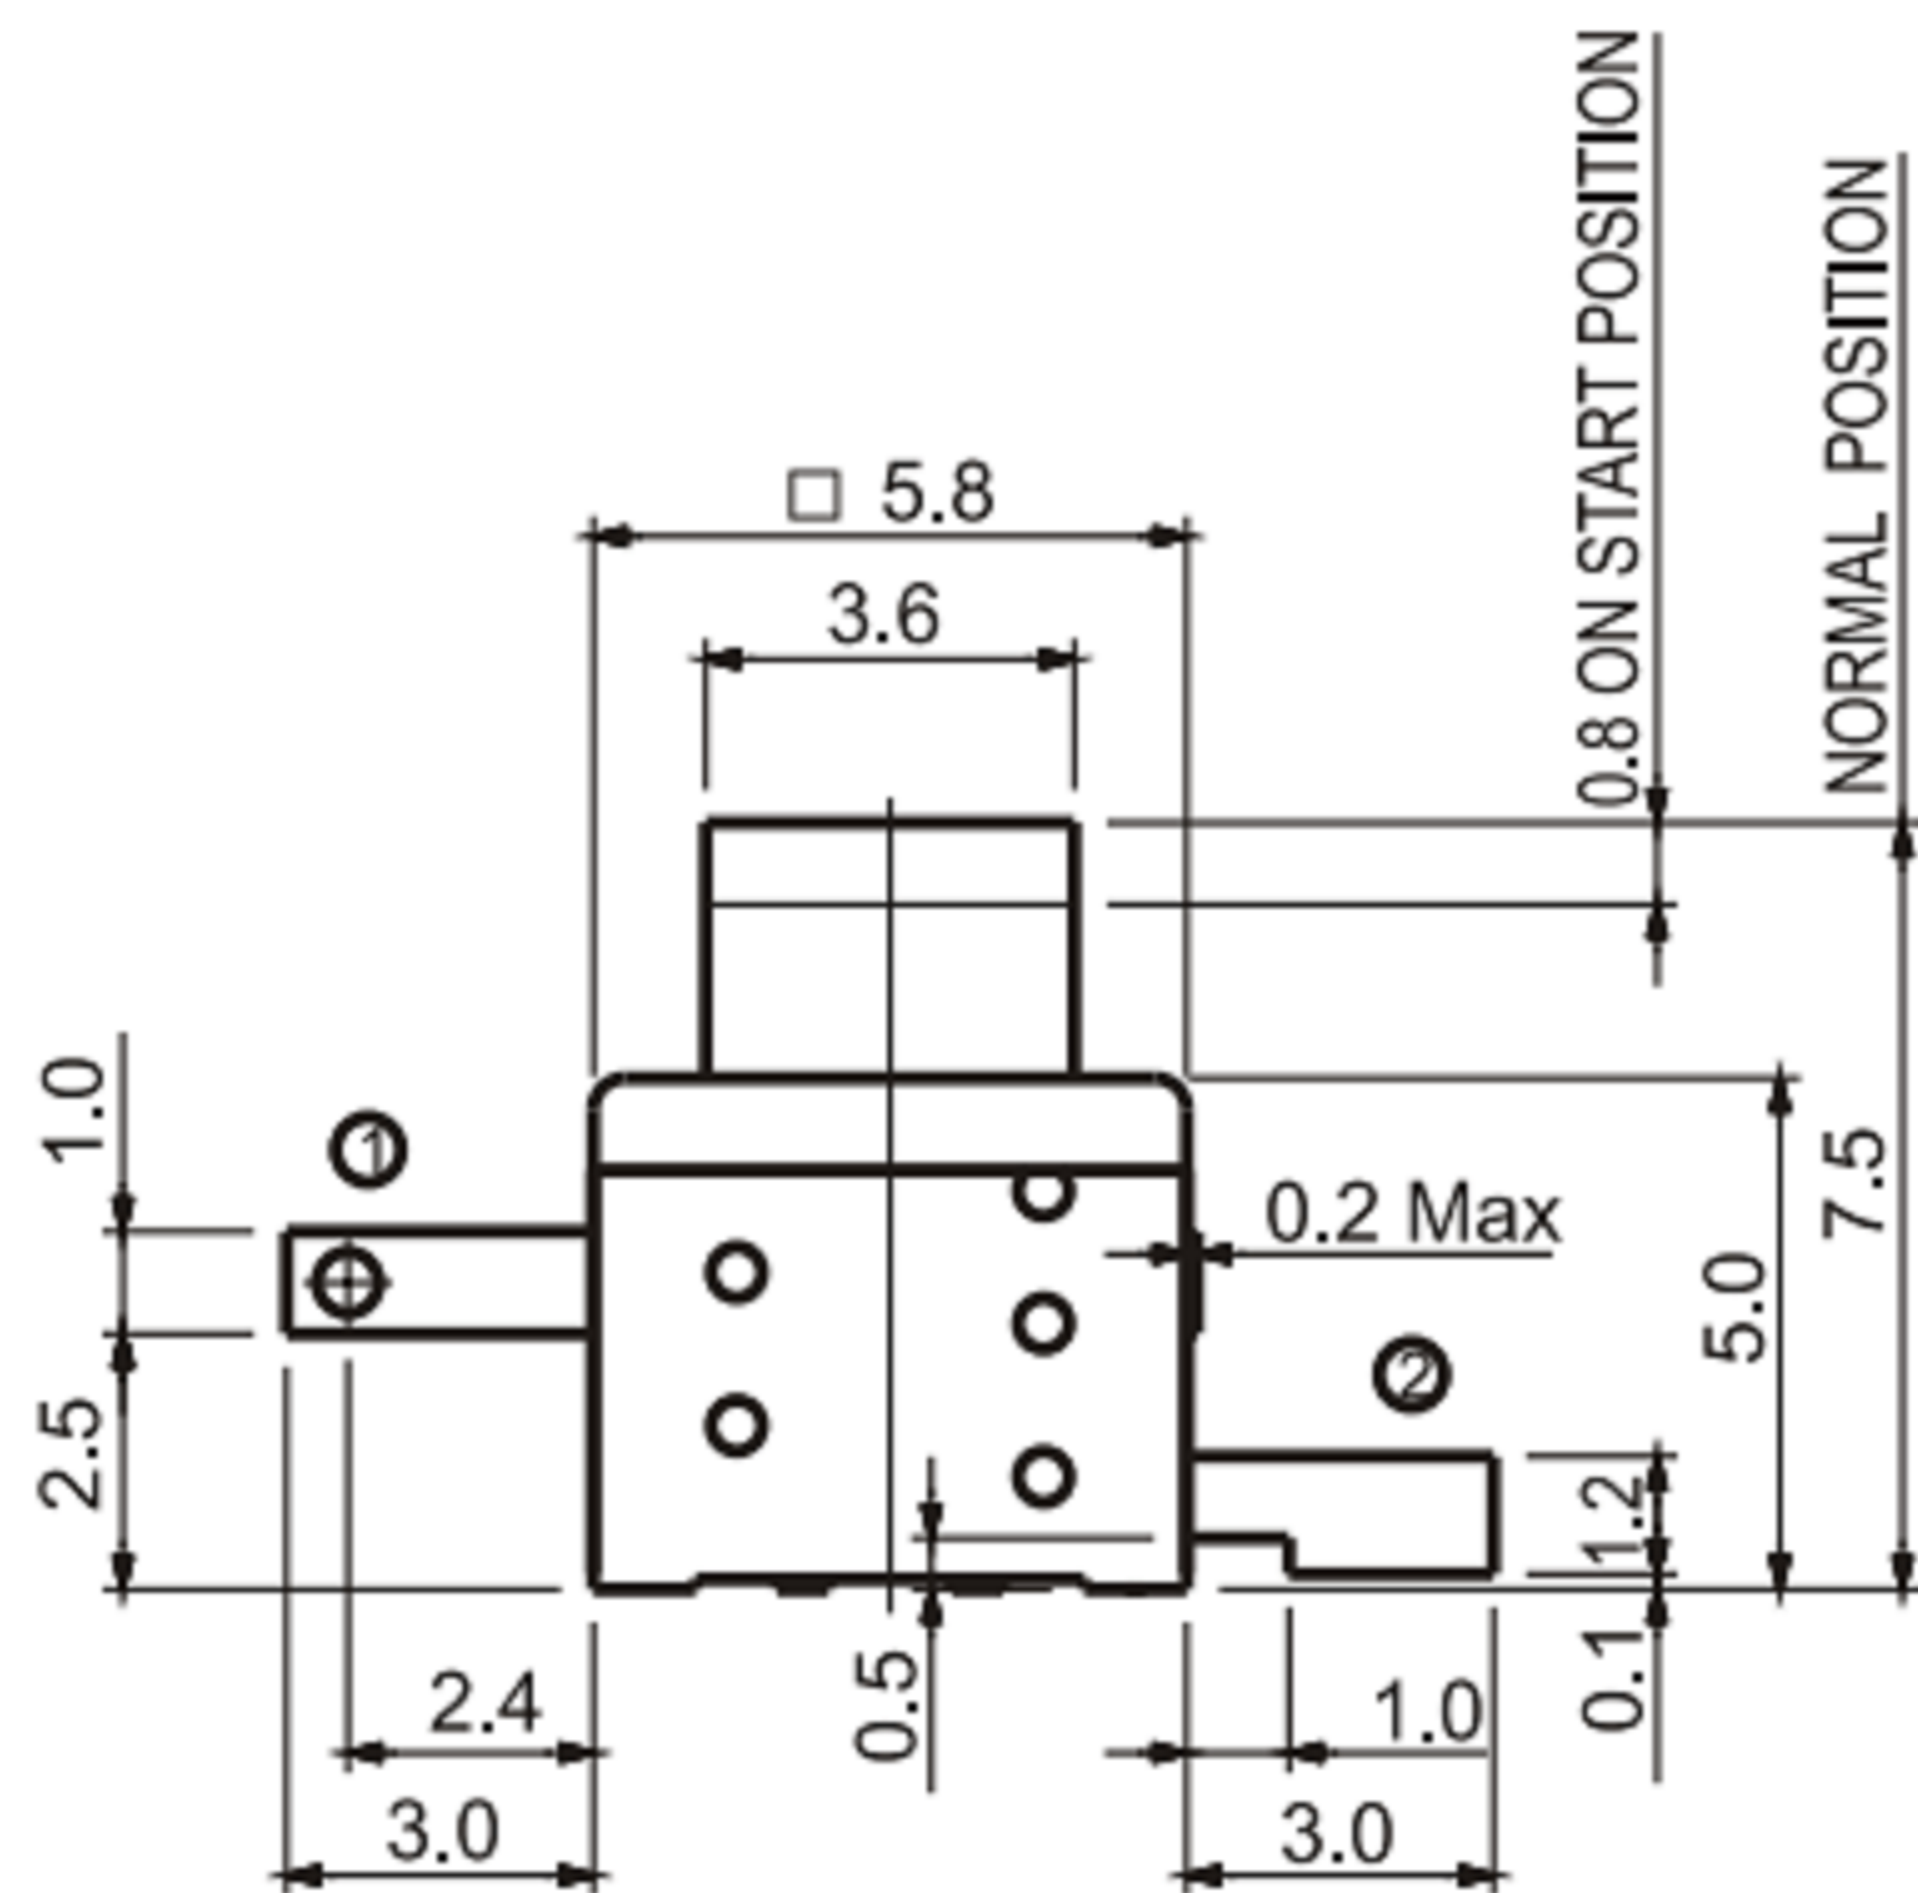

1. Rating: DC 30V 0.2A
2. Circuit: 1C-1P
3. Timing: Non Shorting
4. Operating Mode: Self Lock
5. Travel: Full 1.8mm
Lock 1.0mm
6. Operating Force: 150 ± 50 gf
7. Contact Resistance:
7-1. $50\text{m}\Omega$ (Max.): Initial
7-2. $100\text{m}\Omega$ (Max.): After life test at rating
8. Life Cycle: 10,000 Cycles

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Push Switch			UNIT : mm	DRWG NO.: XB-5858-M-2
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-5858-M-2			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					