


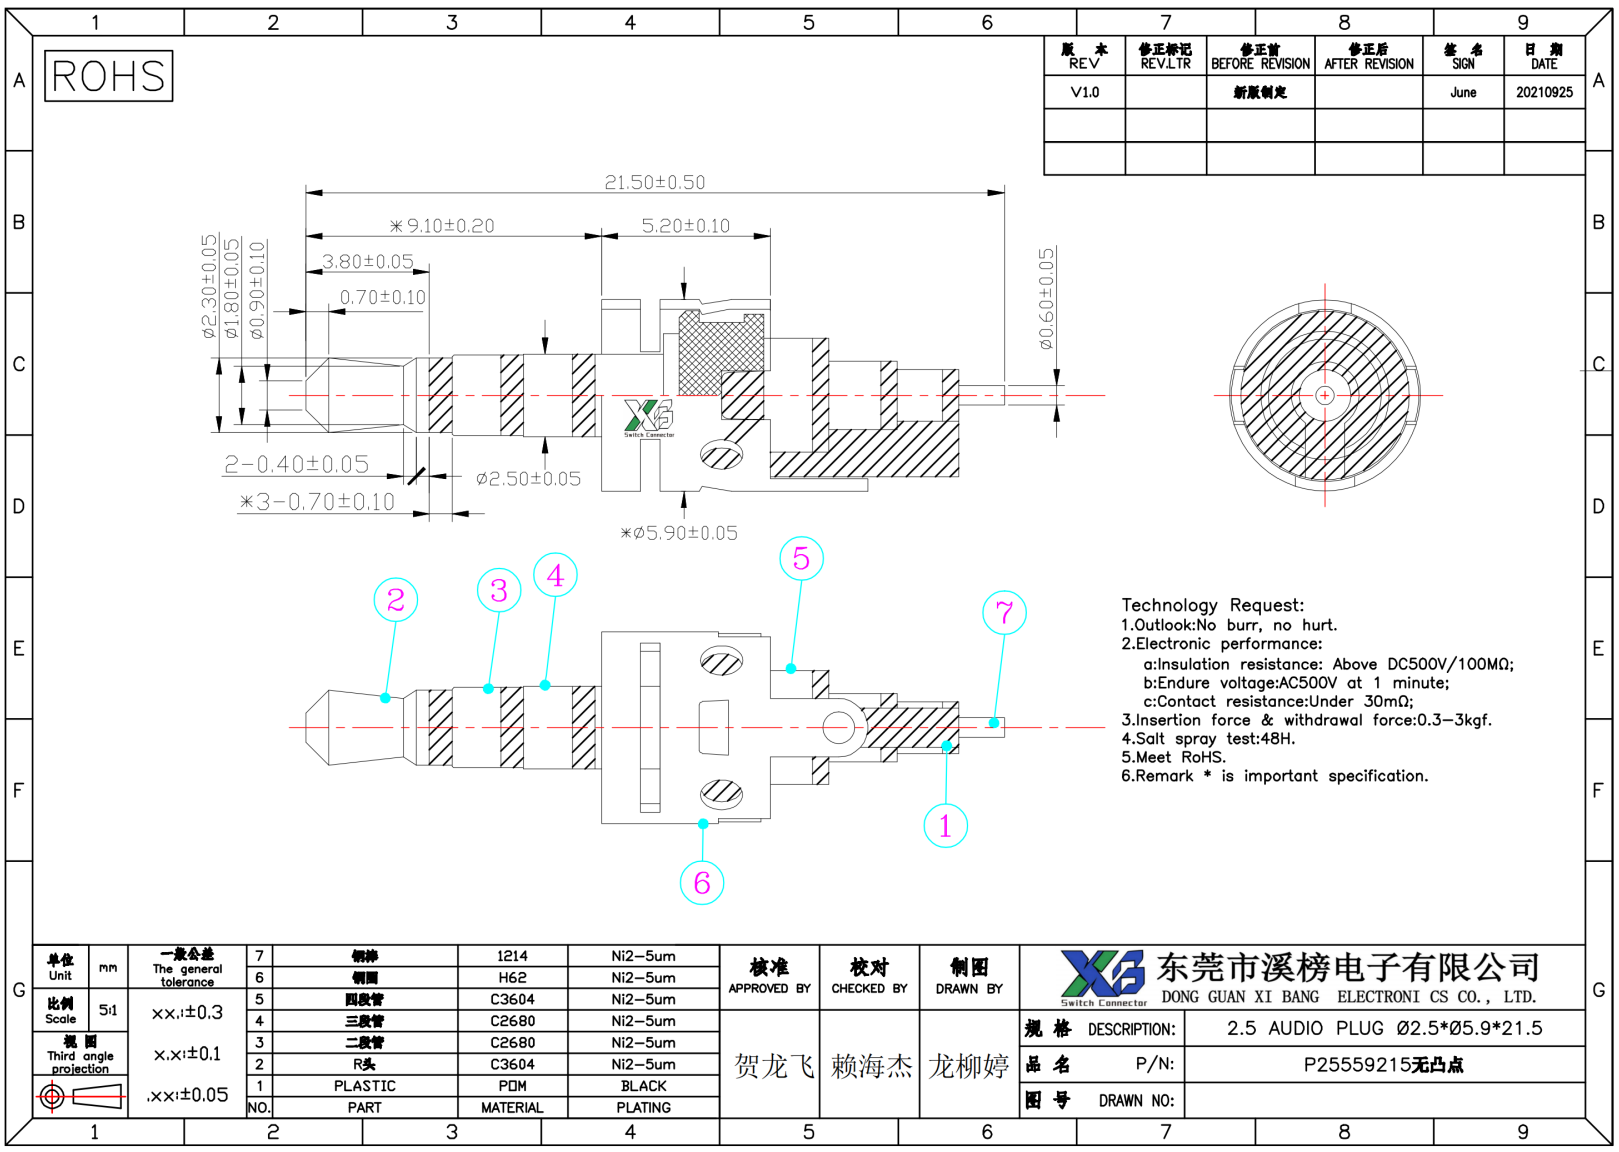

ROHS

原 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新 版 制 定		June	20210925

Technology Request:
1.Outlook:No burr, no hurt.
2.Electronic performance:
a:Insulation resistance: Above DC500V/100MQ;
b:Endure voltage:AC500V at 1 minute;
c:Contact resistance:Under 30mQ;
3.Insertion force & withdrawal force:0.3-3kgf.
4.Salt spray test:48H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7	材料	1214	Ni2-Sum	核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
比例 Scale	5:1	××.1±0.3	6	铜圈	H62	Ni2-Sum						
视图 Third angle projection 		×.x:±0.1	5	四股管	C3604	Ni2-Sum	贺龙飞	赖海杰	龙柳婷		规格 DESCRIPTION:	2.5 AUDIO PLUG Ø2.5*Ø5.9*21.5
		×.x:±0.05	4	三股管	C2680	Ni2-Sum					品 名 P/N:	P25559215无凸点
				3	二股管	C2680					Ni2-Sum	图 号 DRAWN NO:
			2	线头	C3604	Ni2-Sum						
			1	PLASTIC	PDM	BLACK						
			NO.	PART	MATERIAL	PLATING						