


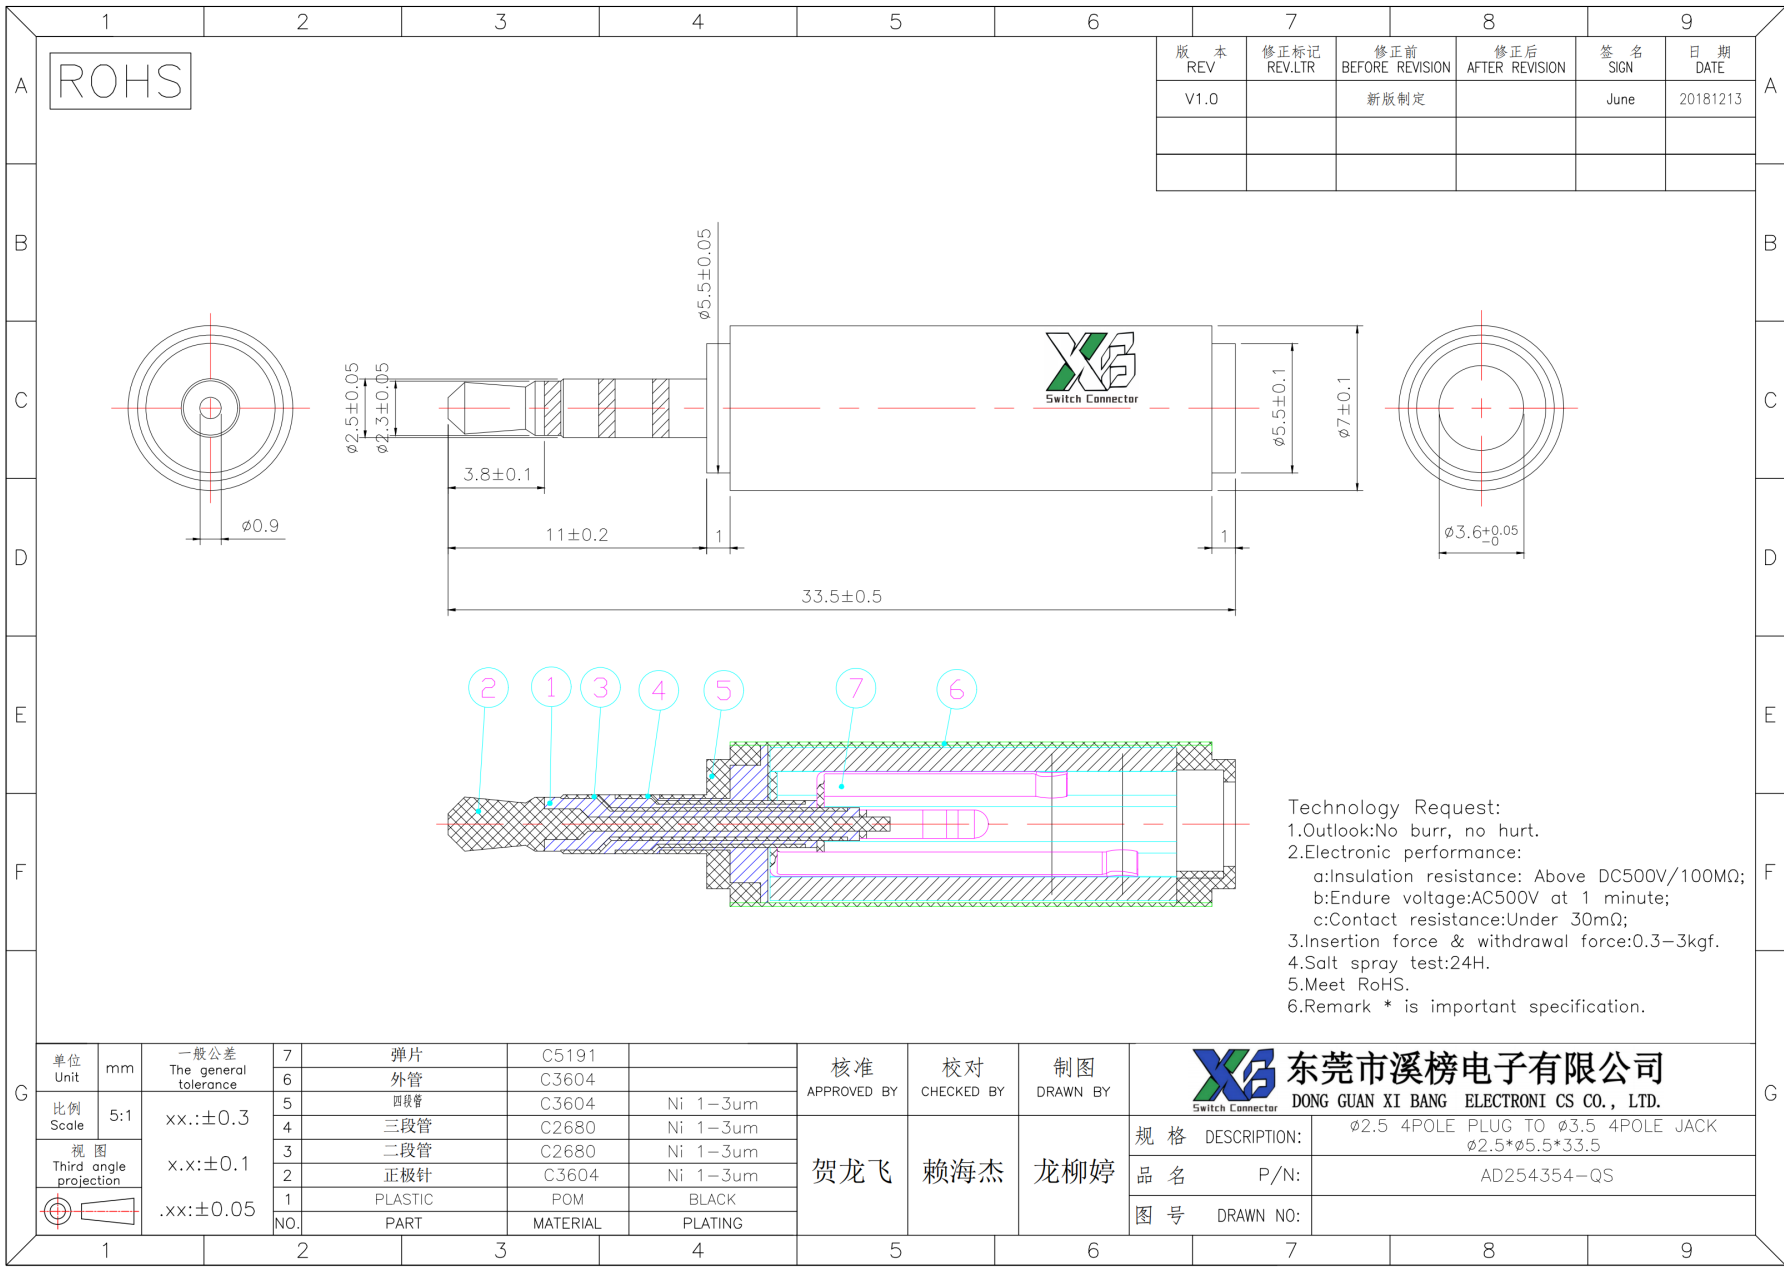

ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20181213

Technology Request:
1.Outlook:No burr, no hurt.
2.Electronic performance:
a:Insulation resistance: Above DC500V/100mΩ;
b:Endure voltage:AC500V at 1 minute;
c:Contact resistance:Under 30mΩ;
3.Insertion force & withdrawal force:0.3–3kgf.
4.Salt spray test:24H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7	弹片	C5191	
比例 Scale	5:1	xx.:±0.3	6	外管	C3604	
视图 Third angle projection		xx.:±0.1	5	四段管	C3604	Ni 1–3um
		xx.:±0.05	4	三段管	C2680	Ni 1–3um
			3	二段管	C2680	Ni 1–3um
			2	正极针	C3604	Ni 1–3um
			1	PLASTIC	POM	BLACK
			NO.	PART	MATERIAL	PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
贺龙飞	赖海杰	龙柳婷

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:	ø2.5 4POLE PLUG TO ø3.5 4POLE JACK ø2.5*ø5.5*33.5
品名 P/N:	AD254354–QS
图号 DRAWN NO:	