



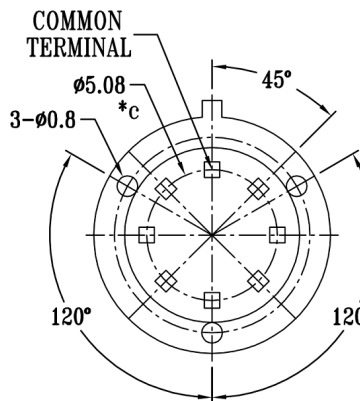
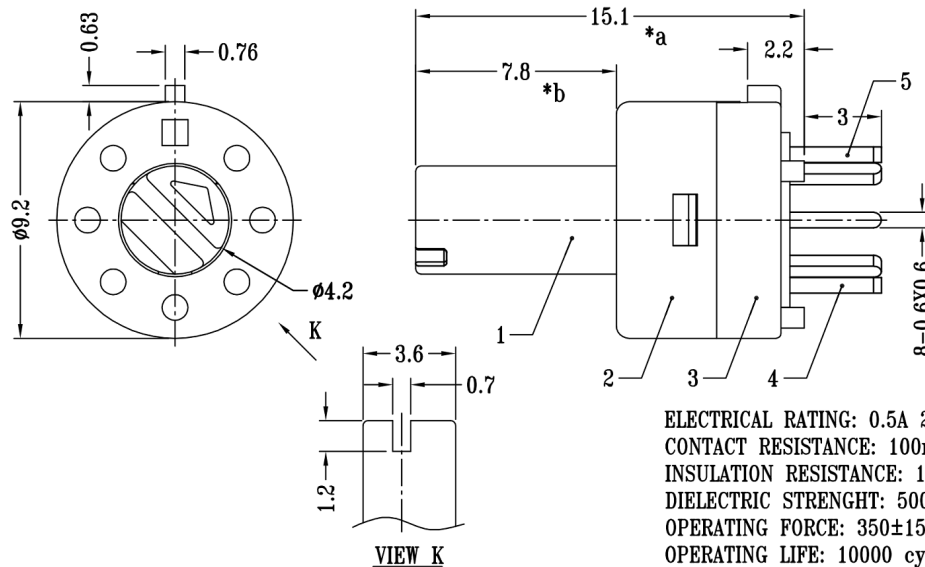
CAD FILE:

ROHS

MODEL NO.	TRAVEL	NUMBER OF POSITIONS
XB-RS-002	45°	①,②
XB-RS-003	90°	①,②,③
XB-RS-004	135°	①,②,③,④
XB-RS-005	180°	①,②,③,④,⑤
XB-RS-006	225°	①,②,③,④,⑤,⑥
XB-RS-007	270°	①,②,③,④,⑤,⑥,⑦
XB-RS-008	315°	①,②,③,④,⑤,⑥,⑦,⑧



SCHEMATIC

P.C.B LAYOUT
BOTTOM VIEW

ELECTRICAL RATING: 0.5A 24V DC ; 0.2A 48V DC
CONTACT RESISTANCE: 100mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN. 500V DC
DIELECTRIC STRENGHT: 500V AC FOR 1 MINUTE
OPERATING FORCE: 350±150gf
OPERATING LIFE: 10000 cycles
OPERATING TEMPERATURE RANGE: -20°C ~ +70°C

注：“*”表示关键尺寸（3个）。

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Rotary Switch		UNIT : mm	DRWG NO.: XB-RS-002-008	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-RS-002-008		SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED				CHK'D	DONG. PANG
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN
NO.	PARTS	MATERIALS	Q'TY	FINISH					

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.2012-9-25
2012-9-25
2012-9-25