
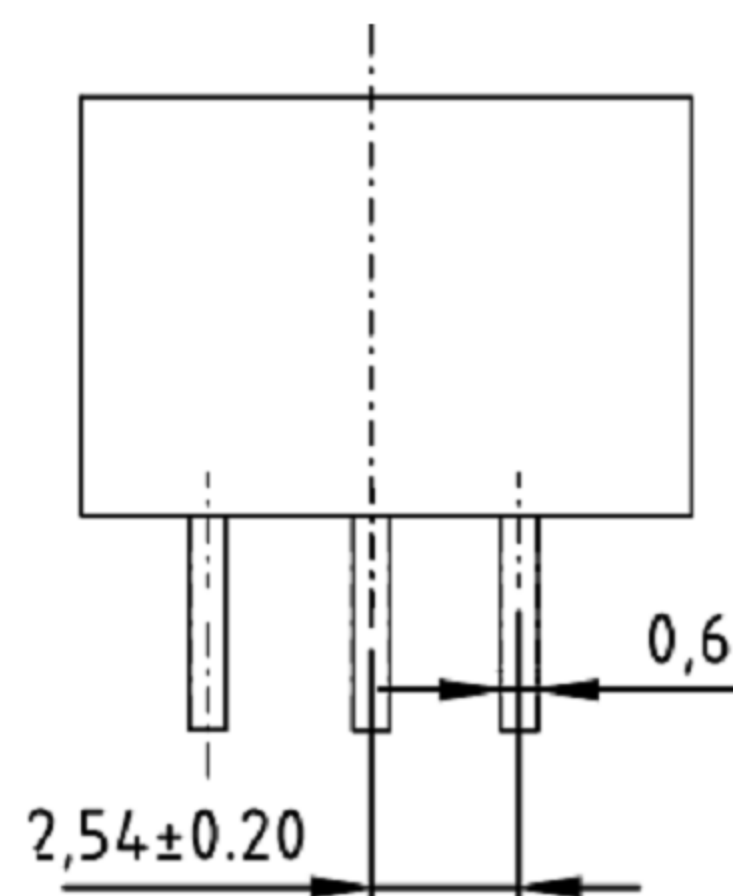
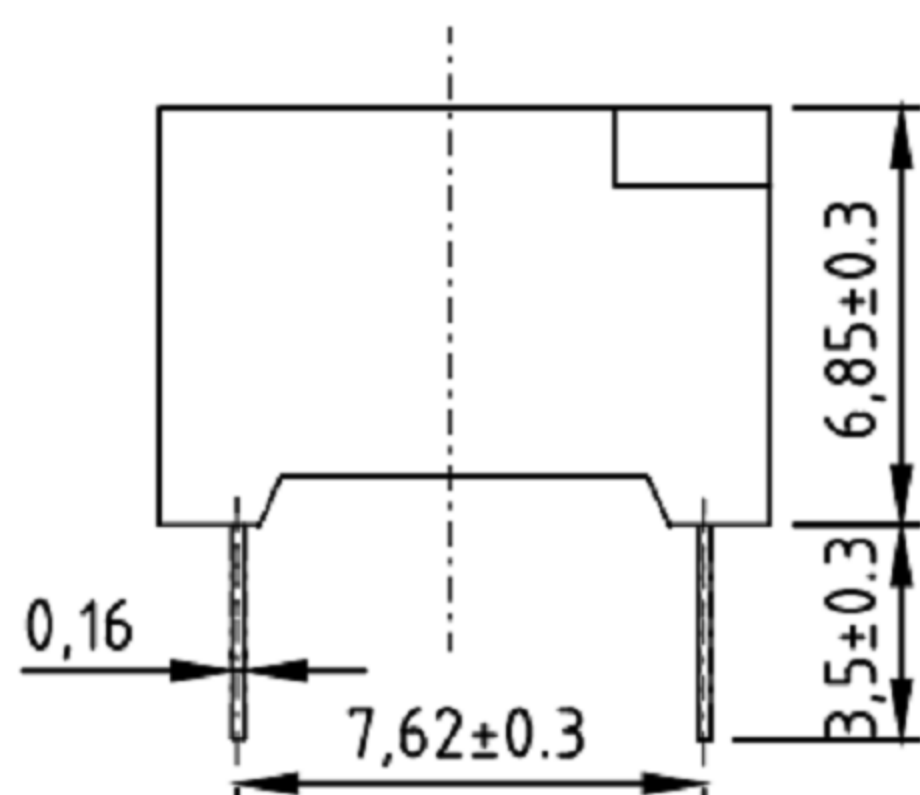
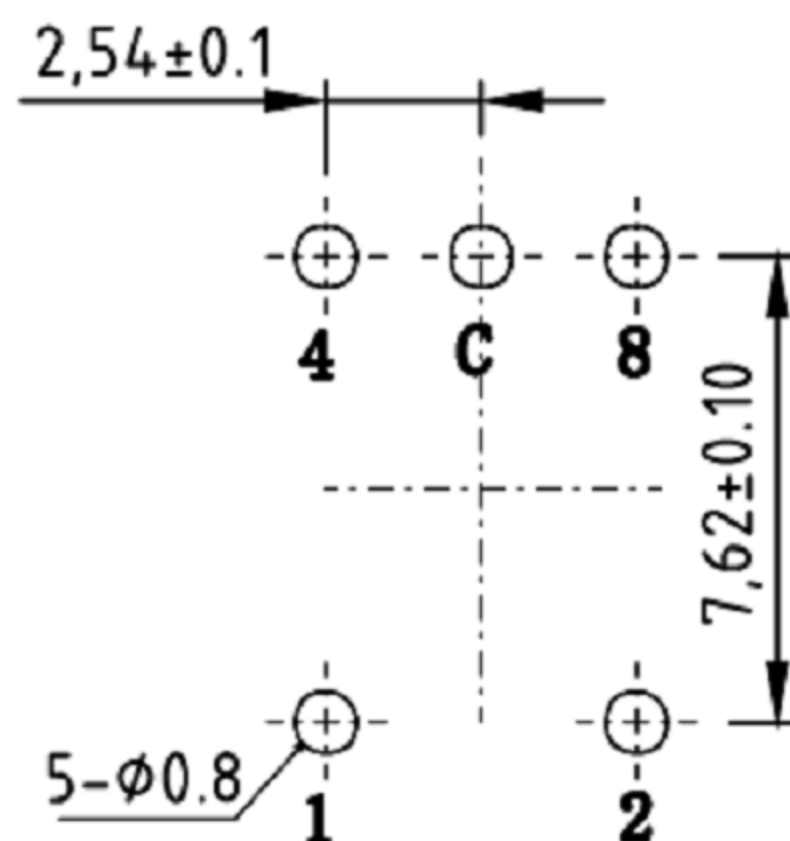




RS-16

### 3 OUTPUT CODES

250VAC Min.for 60 seconds

10Hz-50Hz-10Hz for 6 Hrs.

| PIN NO | POSITION |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|        | 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F |
| 1      |          | ● |   | ● |   | ● |   | ● |   | ● |   | ● |   | ● |   | ● |
| 2      |          |   | ● | ● |   |   | ● | ● |   |   | ● | ● |   |   | ● | ● |
| 4      |          |   |   |   | ● | ● | ● | ● |   |   |   |   | ● | ● | ● | ● |
| 8      |          |   |   |   |   |   |   |   | ● | ● | ● | ● | ● | ● | ● | ● |

|     |         |                 |      |                 |                                                                                                                                |       |           |                          |                           |            |           |
|-----|---------|-----------------|------|-----------------|--------------------------------------------------------------------------------------------------------------------------------|-------|-----------|--------------------------|---------------------------|------------|-----------|
| 8   |         |                 |      |                 | TOLERANCE<br>UNLESS SPECIFIED                                                                                                  |       |           |                          |                           |            |           |
| 7   |         |                 |      |                 |                                                                                                                                |       |           |                          |                           |            |           |
| 6   |         |                 |      |                 | WITHIN 1.5mm : ±0.1mm                                                                                                          | A     | 2012-9-25 | 初 版                      |                           | ZENQ. CHEN |           |
| 5   |         |                 |      |                 | OVER 1.5mm : ±0.2mm                                                                                                            | ISSUE | DATE      | DESCRIPTIONS OF REVISION |                           | APPD.      |           |
| 4   | CONTACT | SUS             | 1    | Ag CLAD         | TITLE : Encoder Swith                                                                                                          |       |           | UNIT : mm                | DRWG NO.: <b>XB-RS-16</b> |            |           |
| 3   | CASE    | PPA/BRASS SRTIP | 1    | BLACK/Ag PLATED | MODEL:                                                                                                                         |       |           | SCALE: 5:1               | DWN.                      | JUN. YANG  | 2012-9-25 |
| 2   | COVER   | STEEL STRIP     | 1    | Ni PLATED       |                                                                                                                                |       |           |                          |                           |            |           |
| 1   | KNOB    | PPA             | 1    | BLACK           |  东莞市溪榜电子有限公司                              |       |           | CHK'D                    | DONG. PANG                | 2012-9-25  |           |
| NO. | PARTS   | MATERIALS       | Q'TY | FINISH          |  DONG GUAN XI BANG ELECTRONI CS CO., LTD. |       |           | APPD.                    | ZENQ. CHEN                | 2012-9-25  |           |