
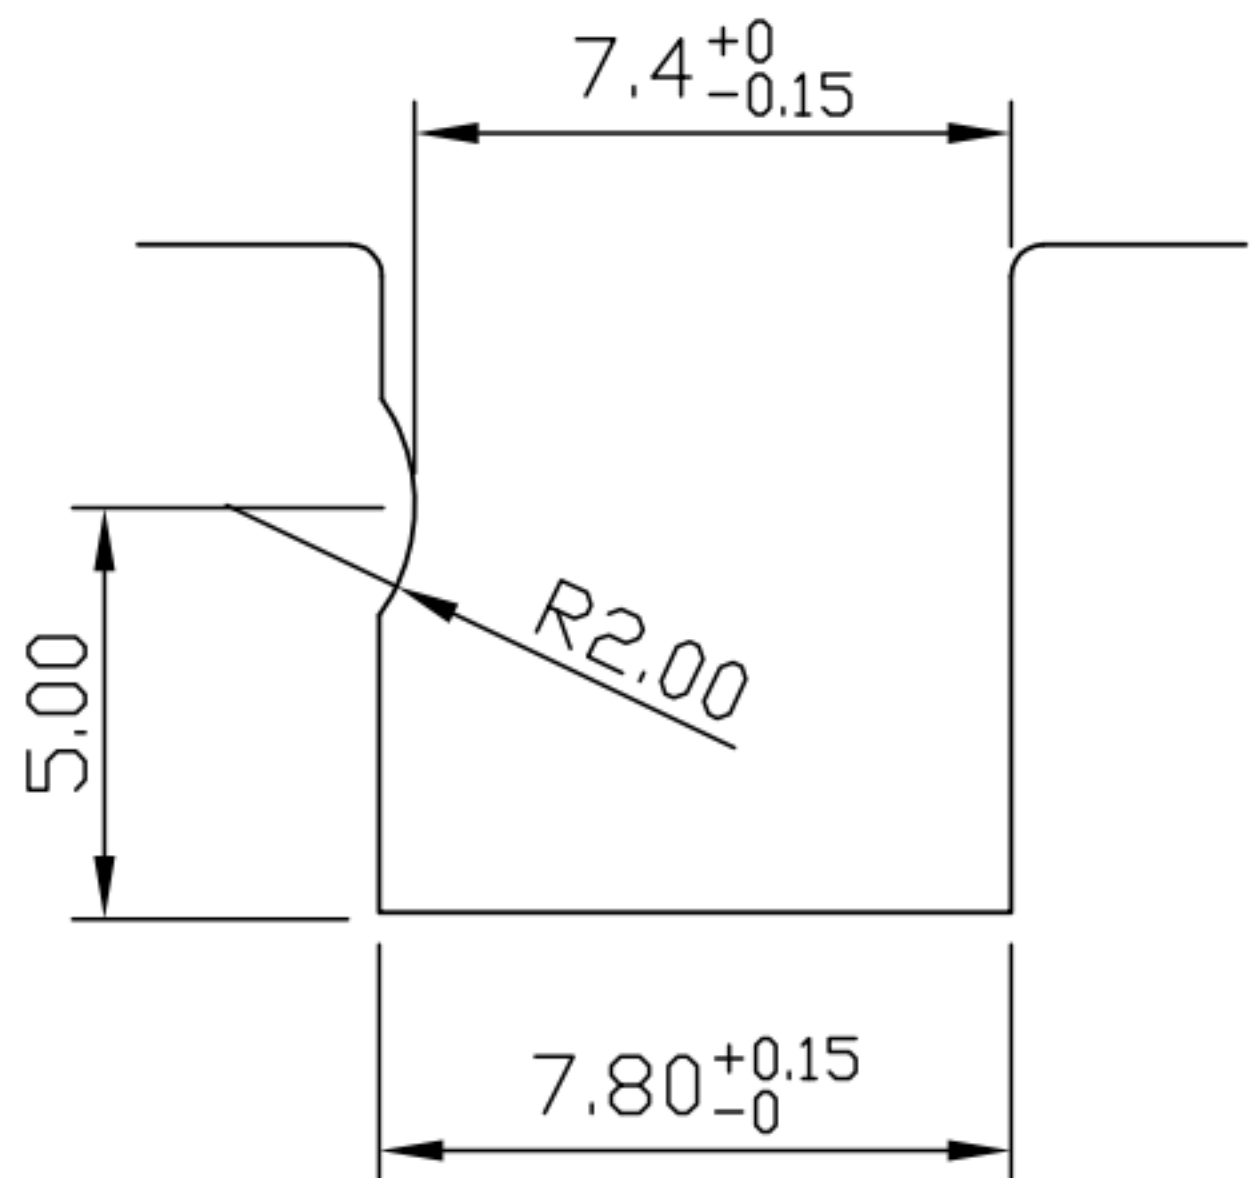
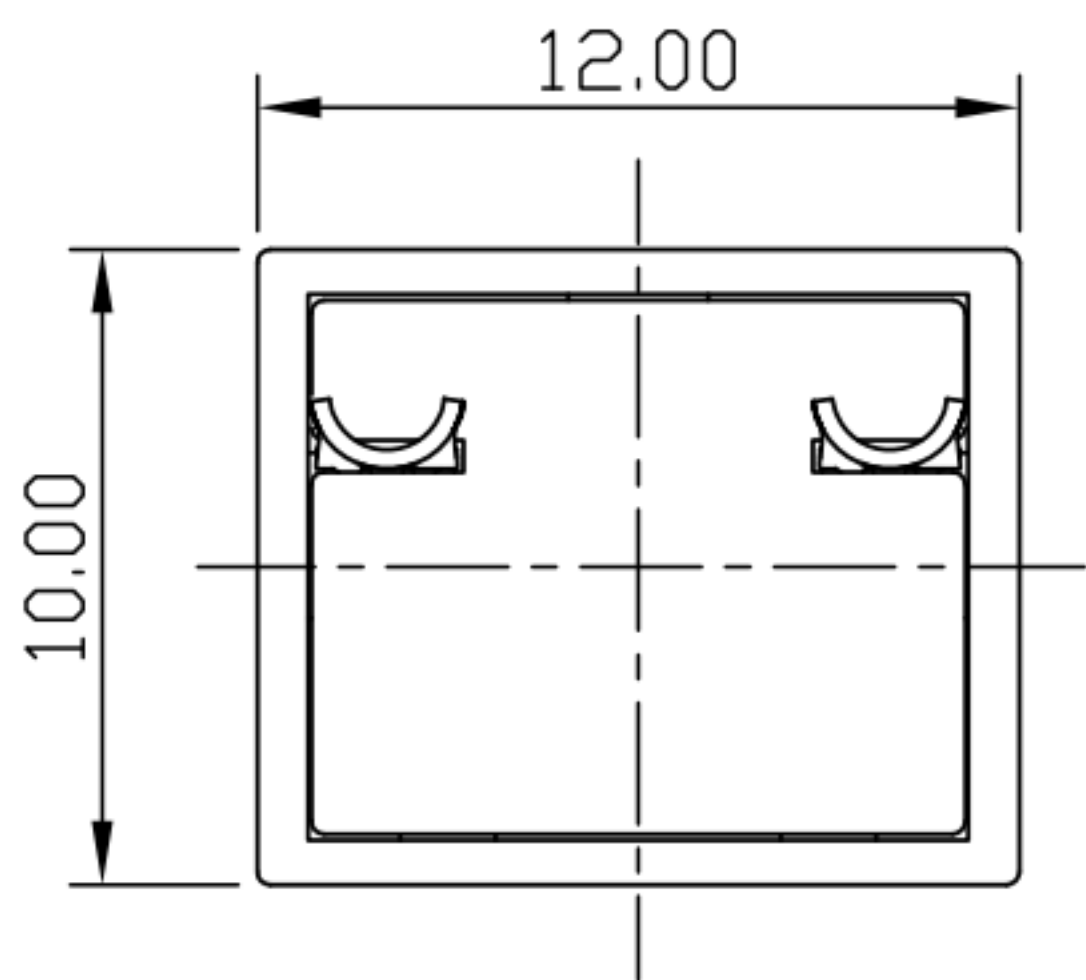
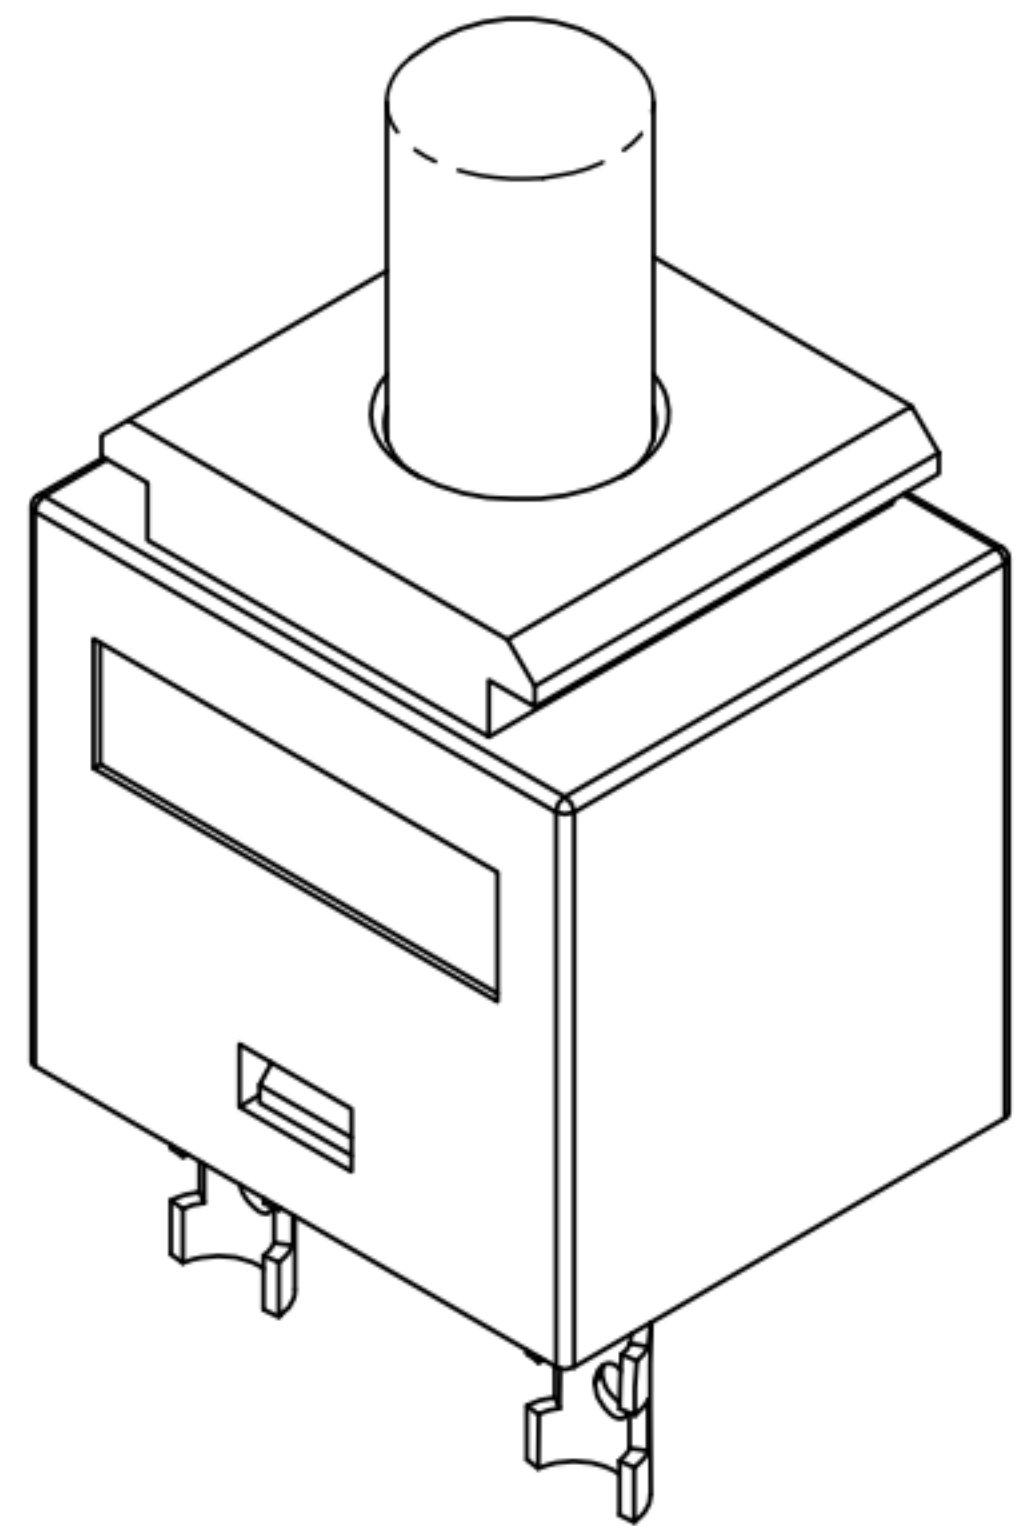
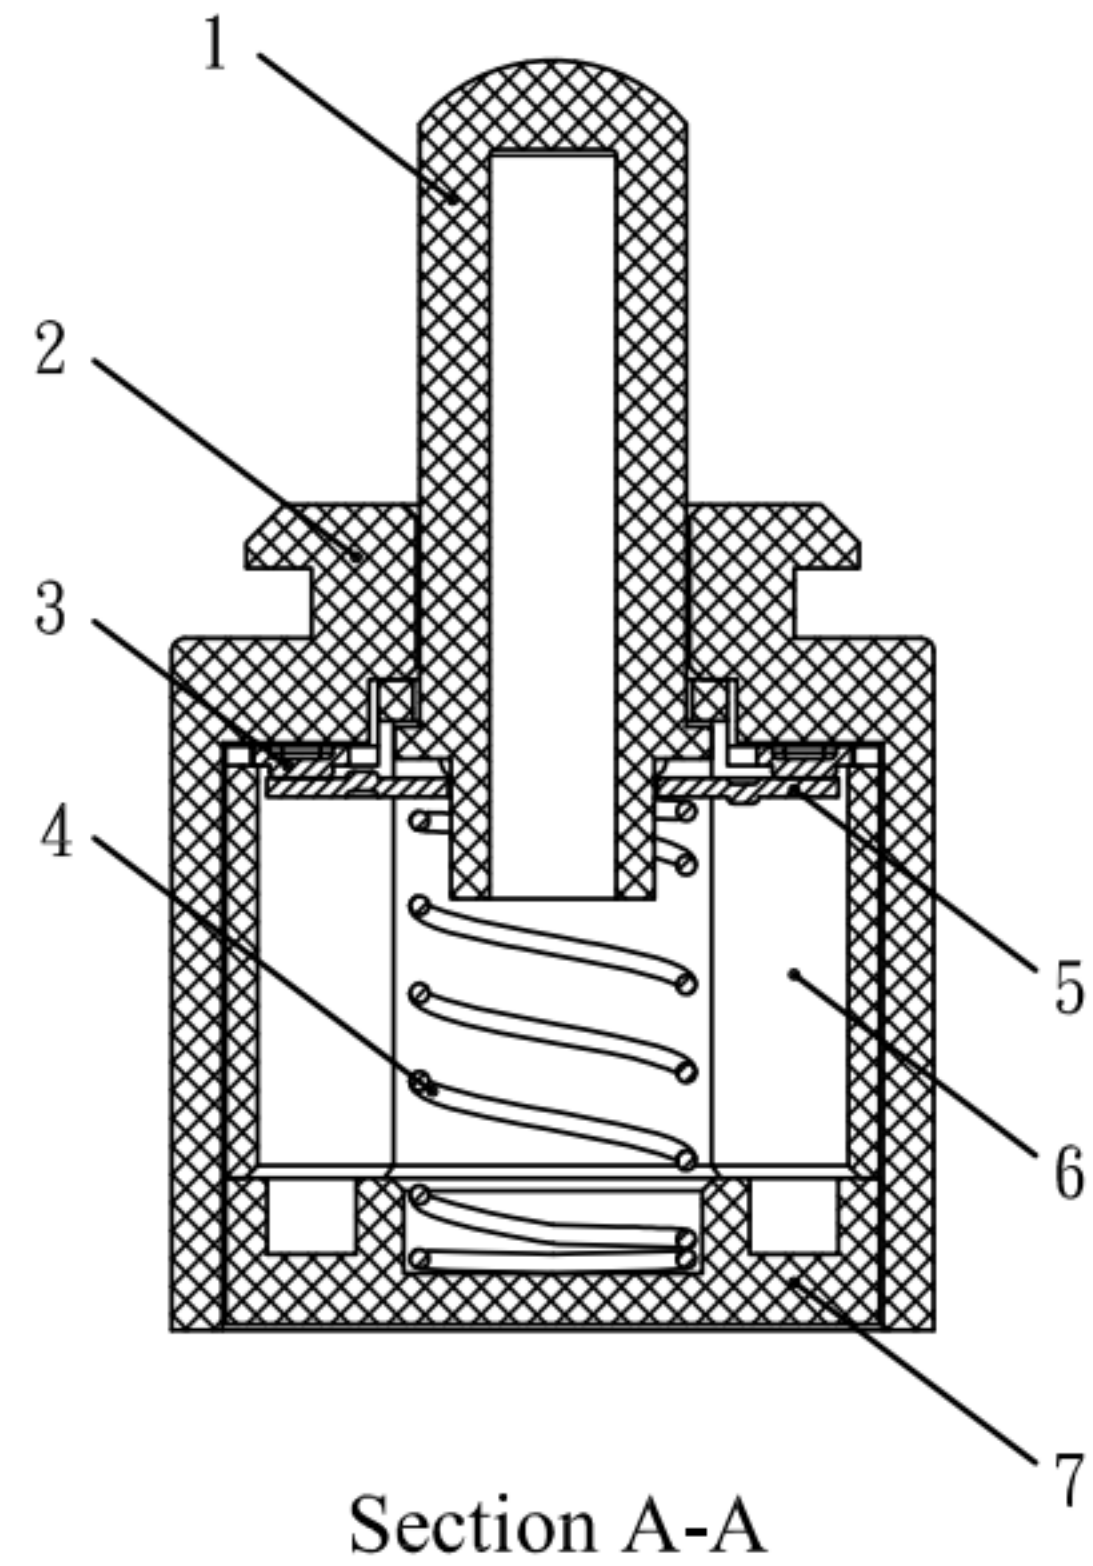
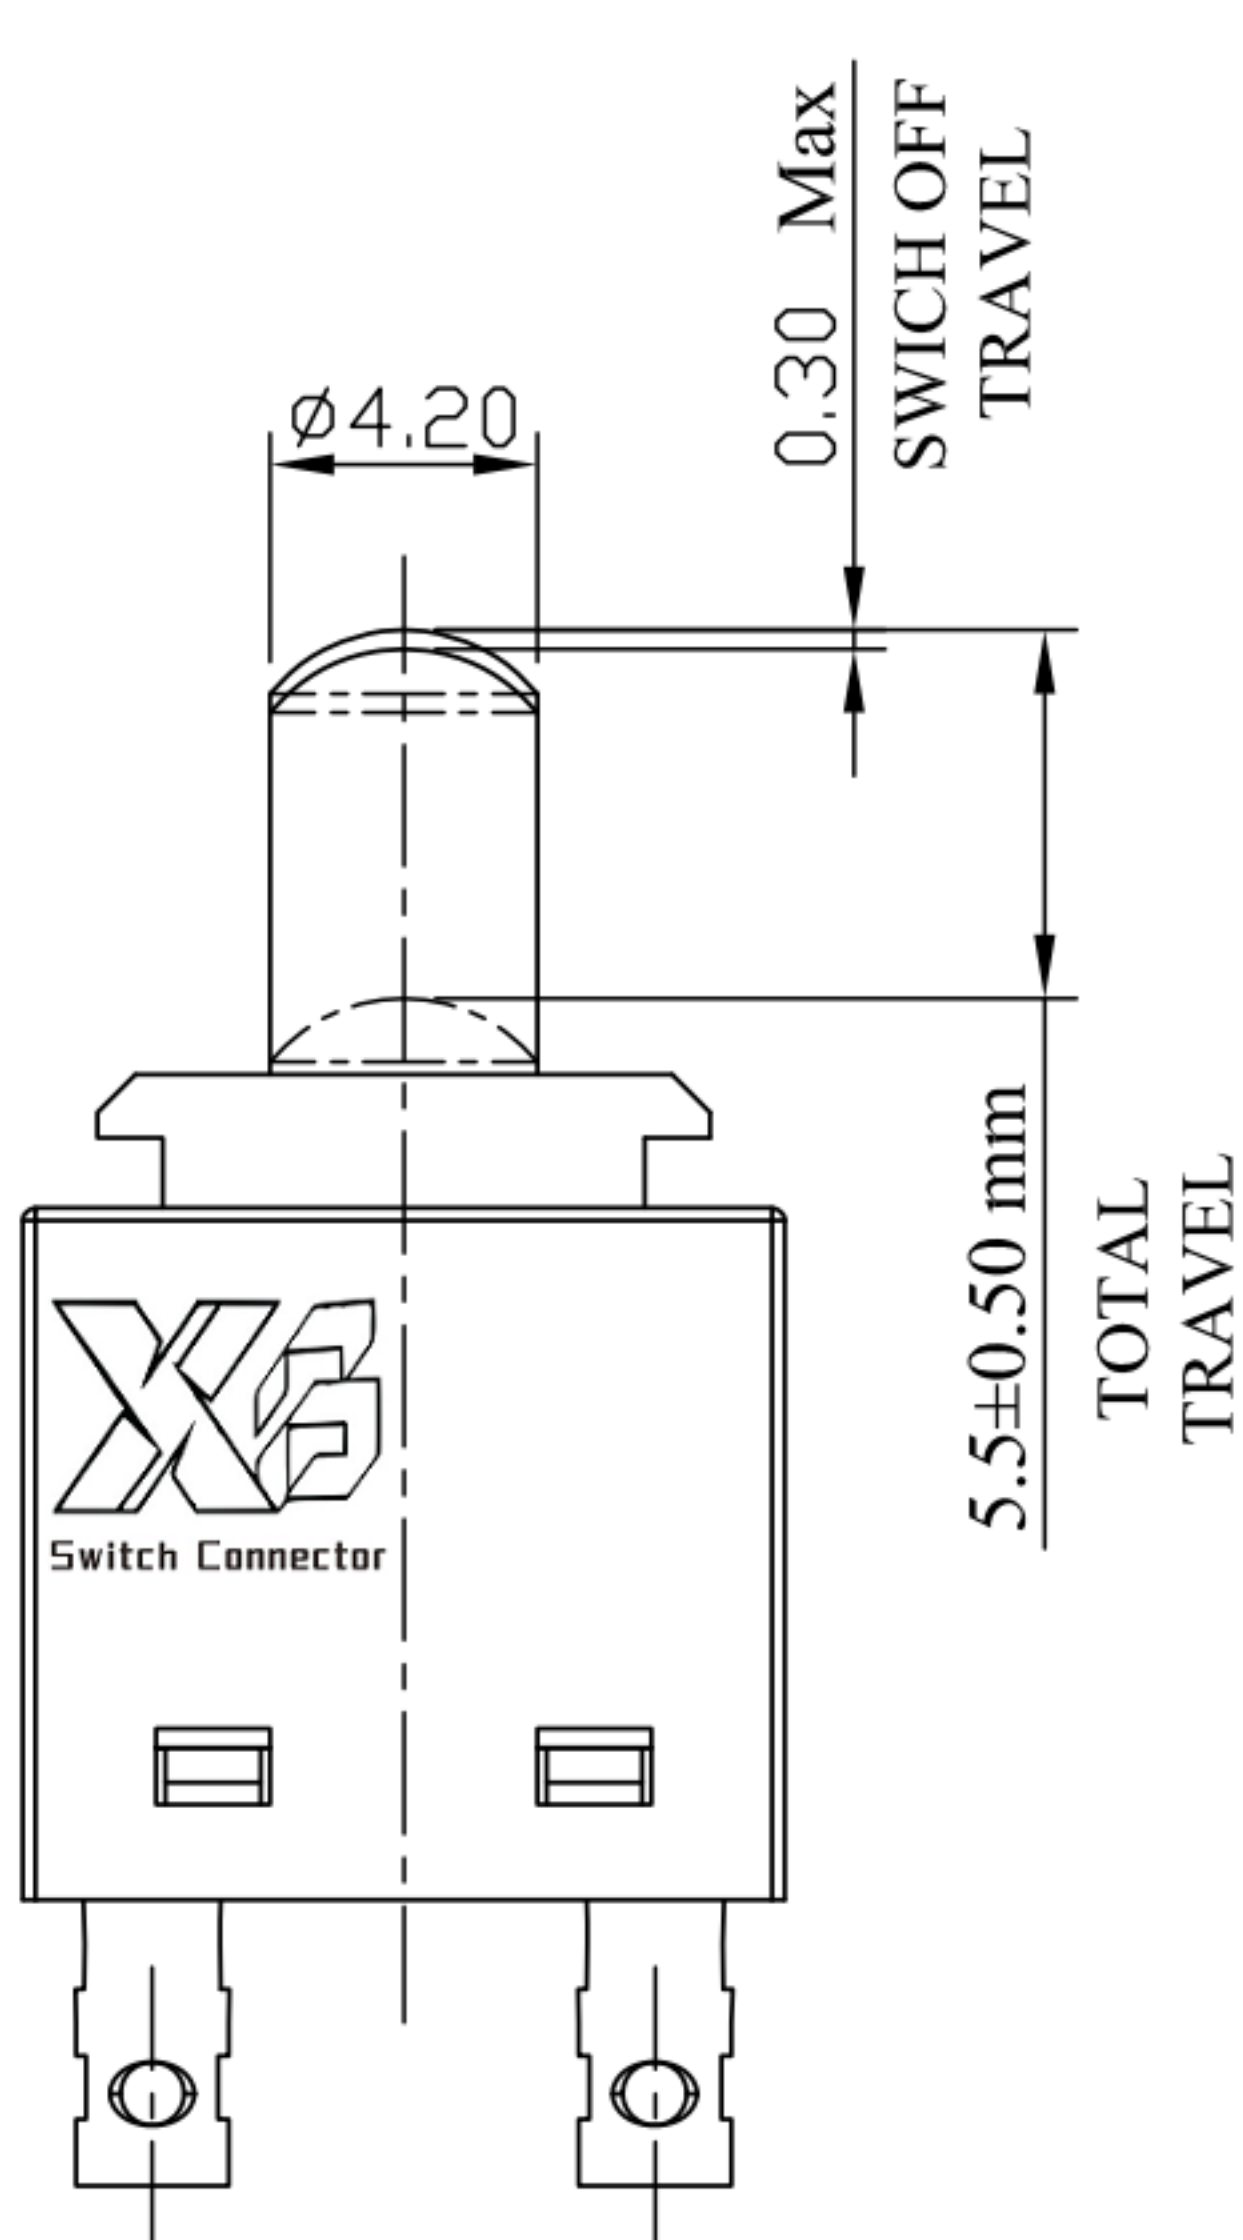
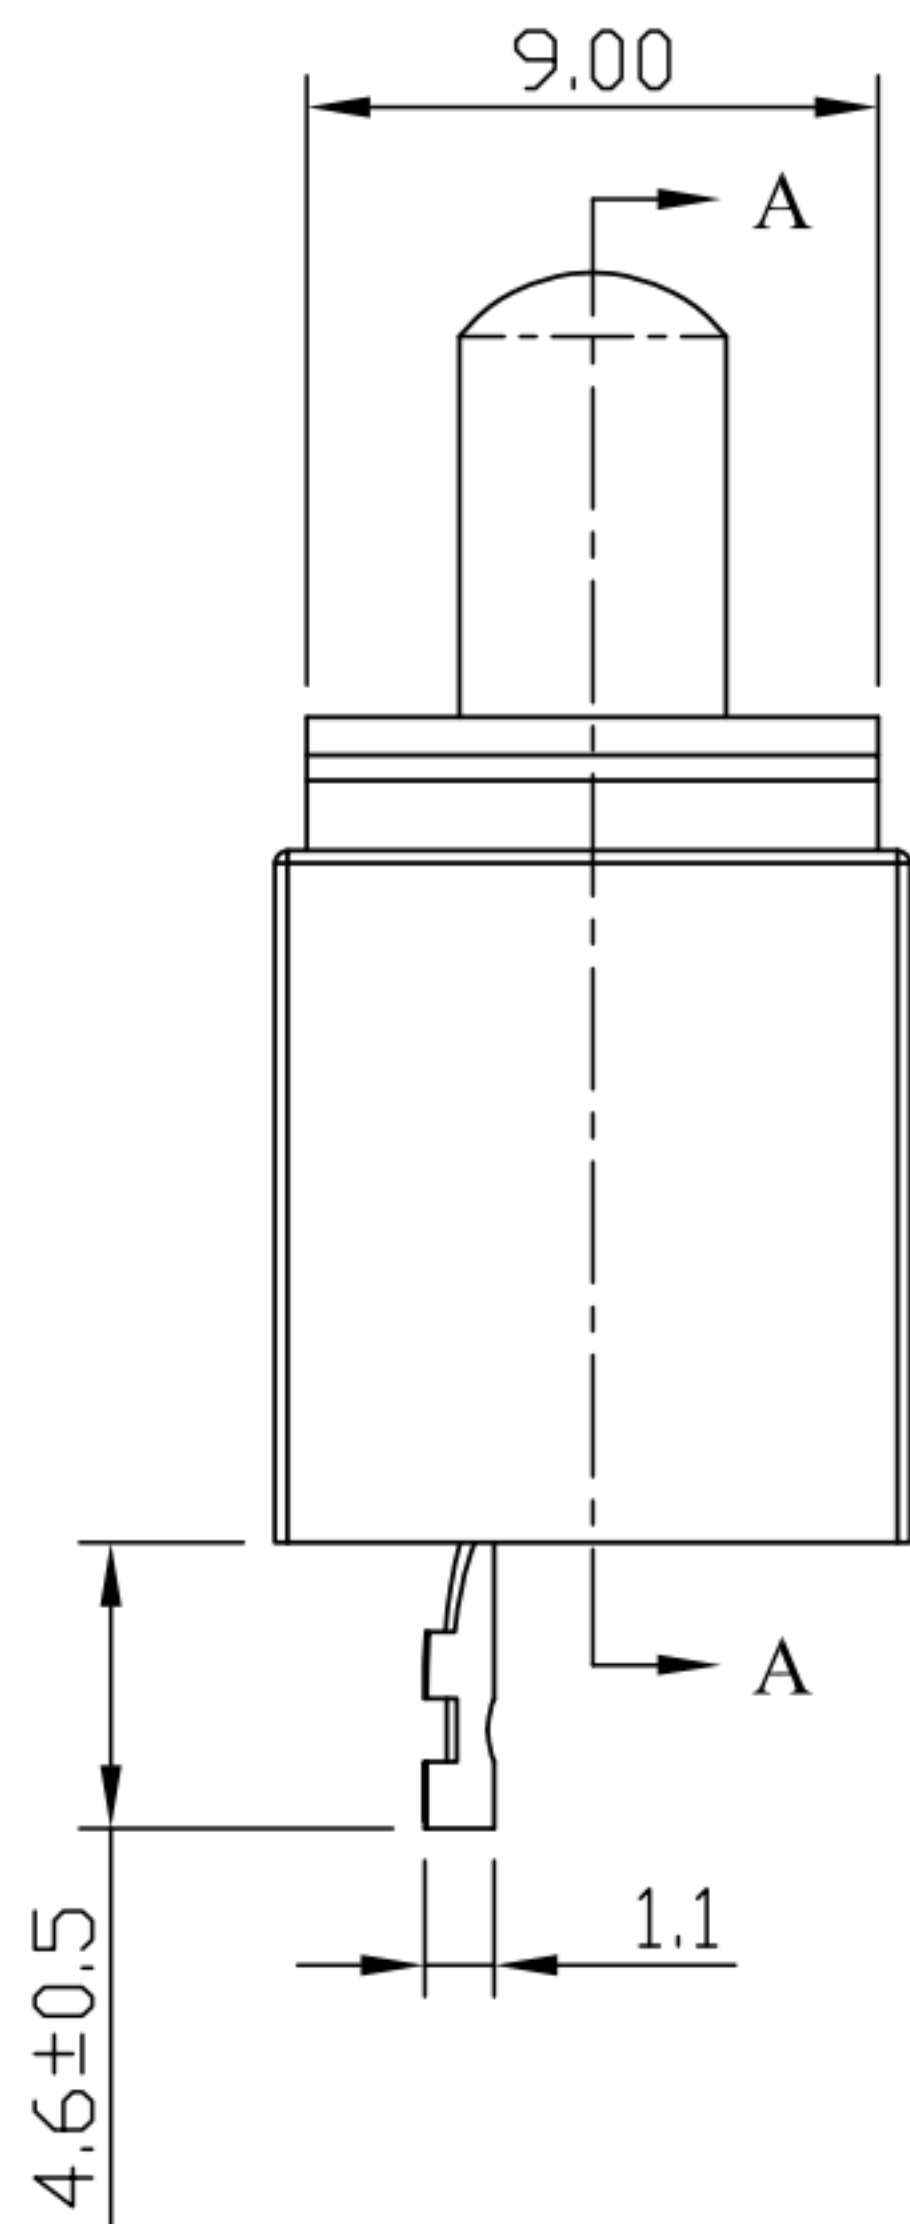


CAD FILE:

ROHS

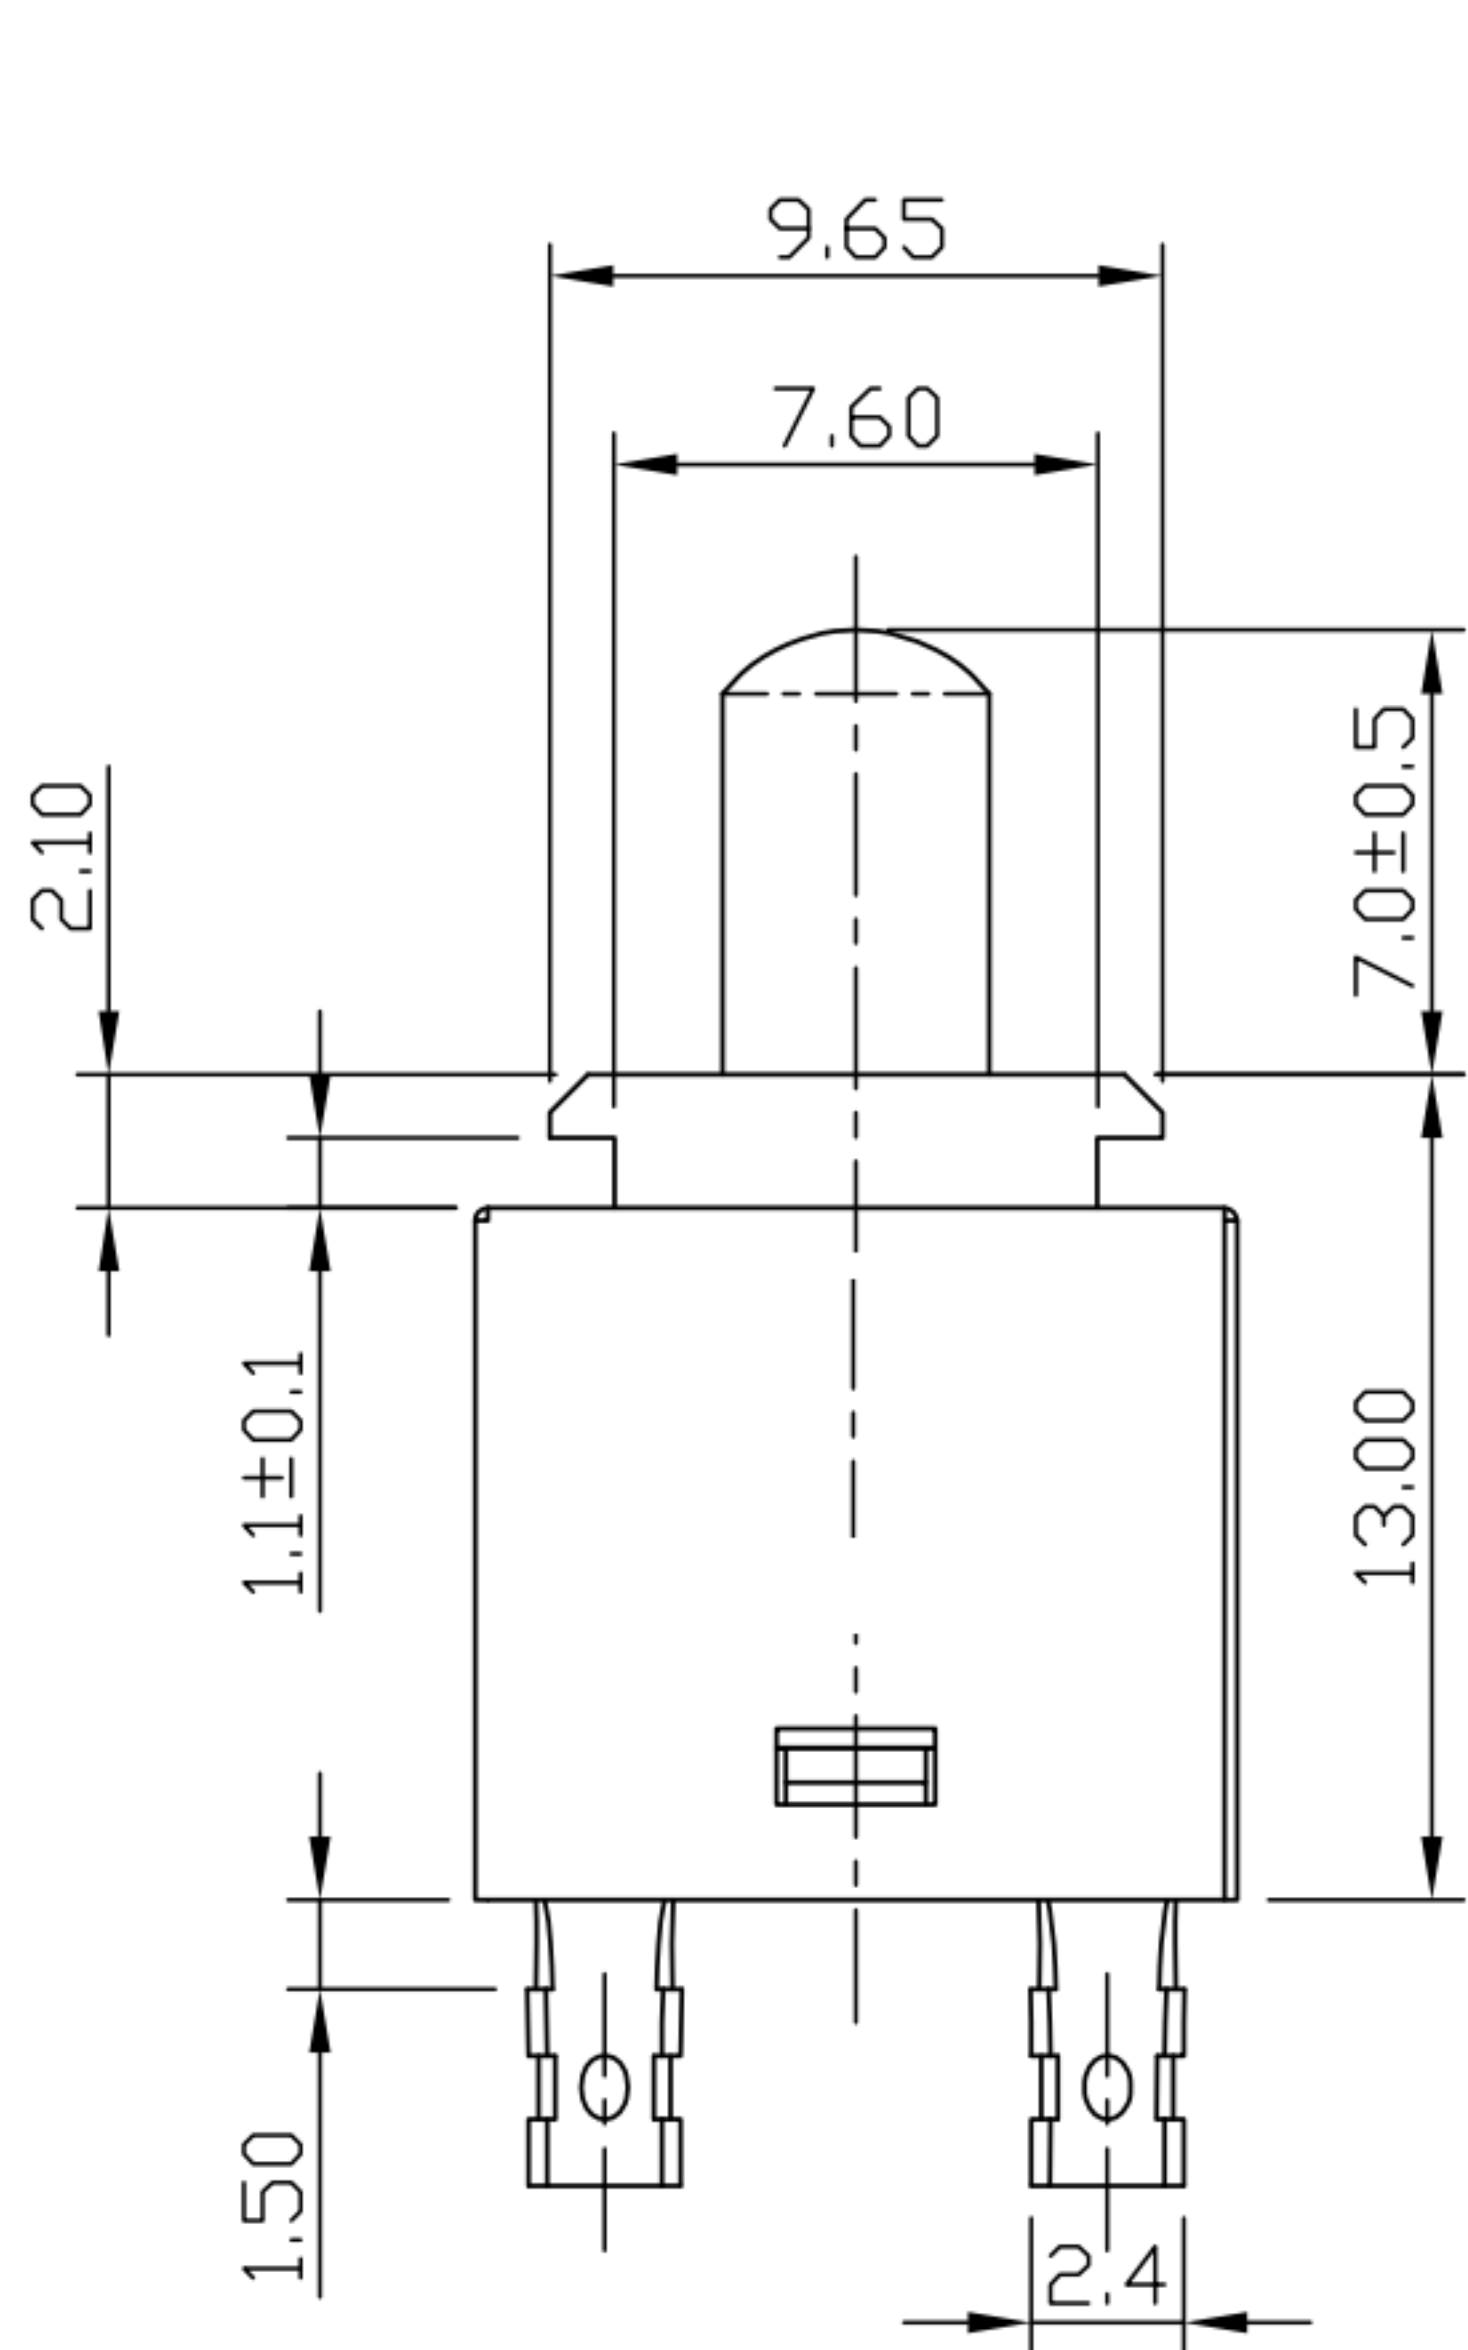

Panel cutout detail maximum  
panel thickness 1.0mm

CIRCUIT

(PUSH OFF)



SPECIFICATIONS:  
CONTACT RATING: 20VAC/VDC 0.4A Max  
CONTACT RESISTANCE: 50mΩ Max initial  
INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN  
DIELECTRIC STRENGTH: 500VAC(50/60Hz) FOR 1MIN  
MECHANICAL LIFE: 100,000 make-and-break cycles  
OPERATION FORCE: 300g Max.  
SWICH OFF TRAVEL: 0.30mm Max.  
TOTAL TRAVEL: 5.5±0.50mm  
OPERATING TEMPREATURE: -20°C to 70°C.

|     |         |                 |      |                 |                                                                                                                                               |       |           |                          |                          |
|-----|---------|-----------------|------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|--------------------------|--------------------------|
| 8   |         |                 |      |                 | TOLERANCE<br>UNLESS SPECIFIED                                                                                                                 |       |           |                          |                          |
| 7   |         |                 |      |                 |                                                                                                                                               |       |           |                          |                          |
| 6   |         |                 |      |                 | WITHIN 1.5mm : ±0.1mm<br>OVER 1.5mm : ±0.2mm                                                                                                  | A     | 2012-9-25 | 初 版                      | ZENQ. CHEN               |
| 5   |         |                 |      |                 |                                                                                                                                               | ISSUE | DATE      | DESCRIPTIONS OF REVISION | APPD.                    |
| 4   | CONTACT | SUS             | 1    | Ag CLAD         | TITLE : Detector Switch                                                                                                                       |       |           | UNIT : mm                | DRWG NO.: XB-RS-PB221-T  |
| 3   | CASE    | PPA/BRASS SRTIP | 1    | BLACK/Ag PLATED | MODEL: XB-RS-PB221-T                                                                                                                          |       |           | SCALE: 5:1               | DWN. JUN. YANG 2012-9-25 |
| 2   | COVER   | STEEL STRIP     | 1    | Ni PLATED       |  东莞市溪榜电子有限公司<br>DONG GUAN XI BANG ELECTRONI CS CO., LTD. |       |           | CHK'D                    | DONG. PANG 2012-9-25     |
| 1   | KNOB    | PPA             | 1    | BLACK           |                                                                                                                                               |       |           | APPD.                    | ZENQ. CHEN 2012-9-25     |
| NO. | PARTS   | MATERIALS       | Q'TY | FINISH          |                                                                                                                                               |       |           |                          |                          |