

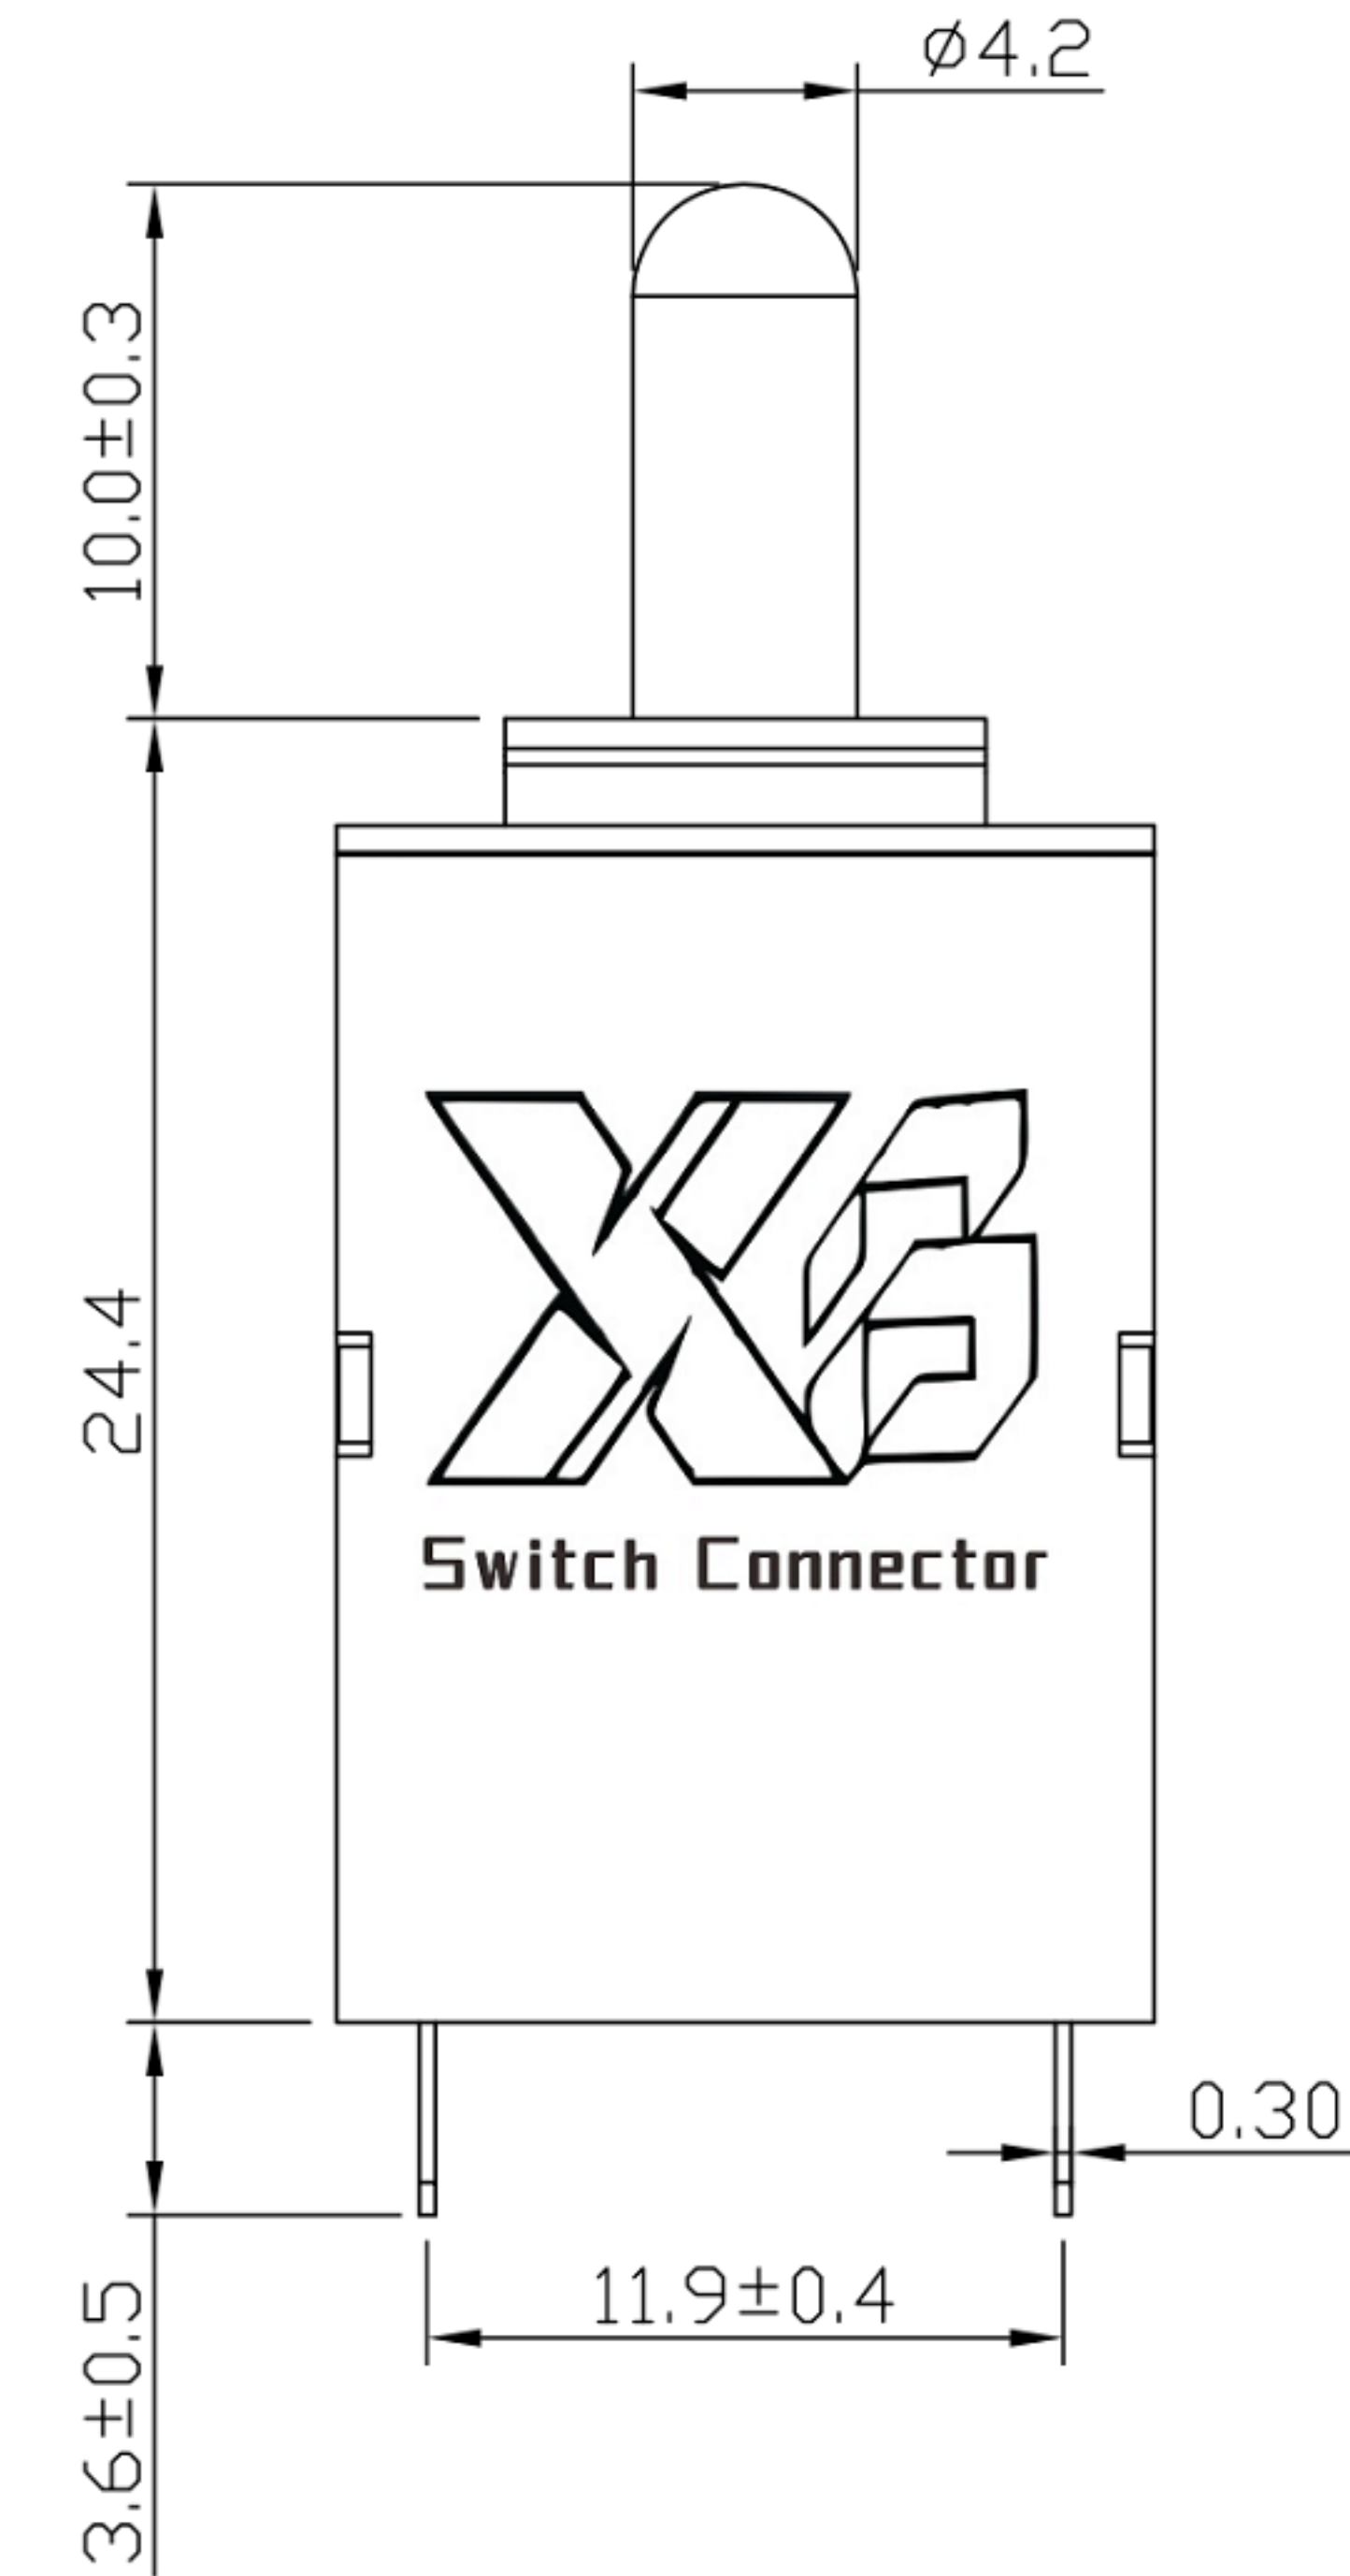


CAD FILE:


ROHS

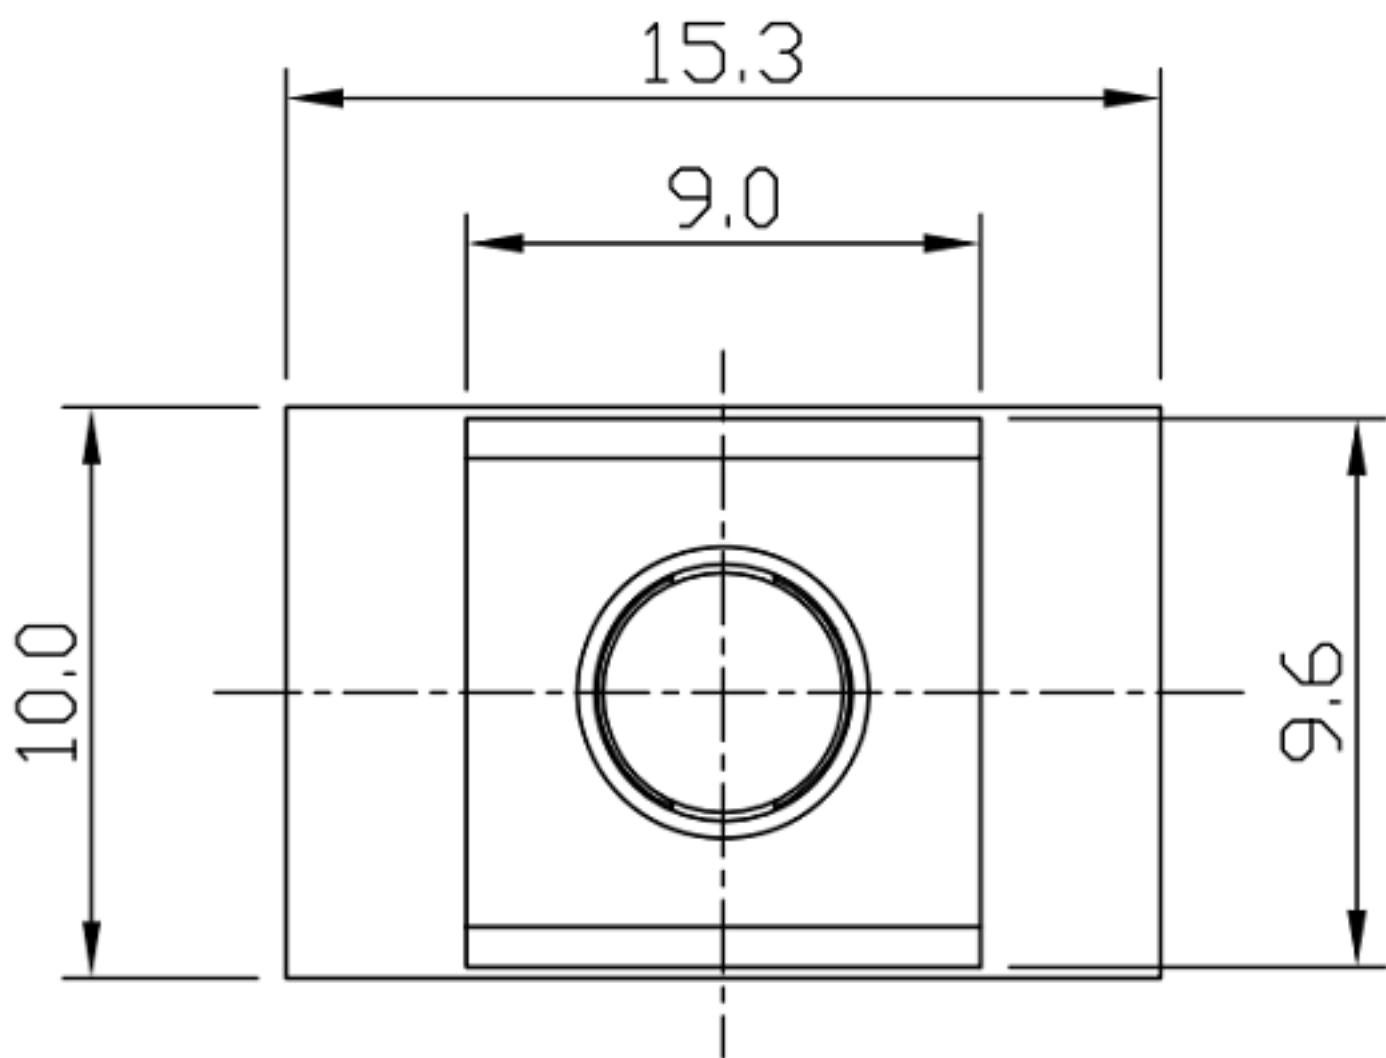

P. C. B. LAYOUT


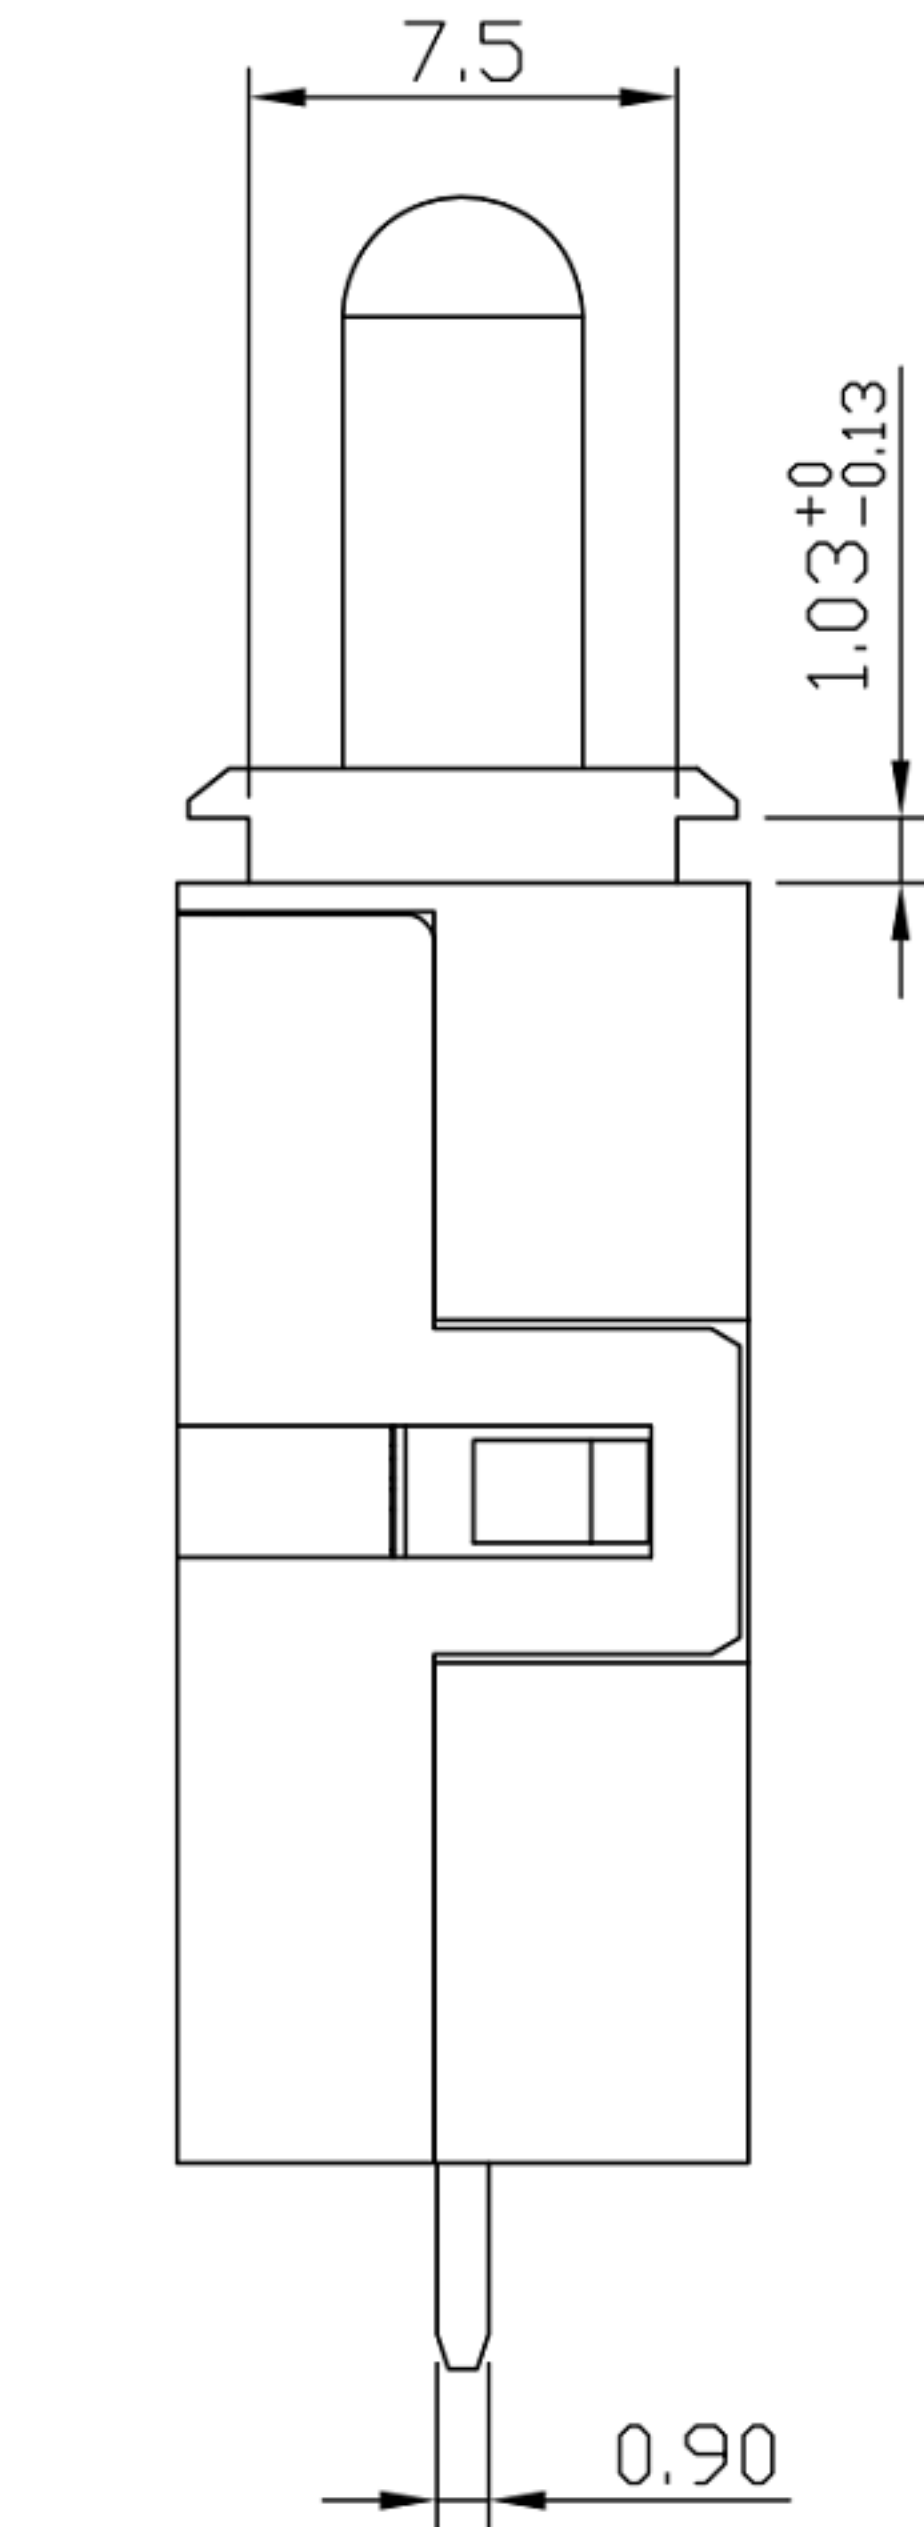


Panel cutout detail maximum panel thickness 0.8~1.0 mm

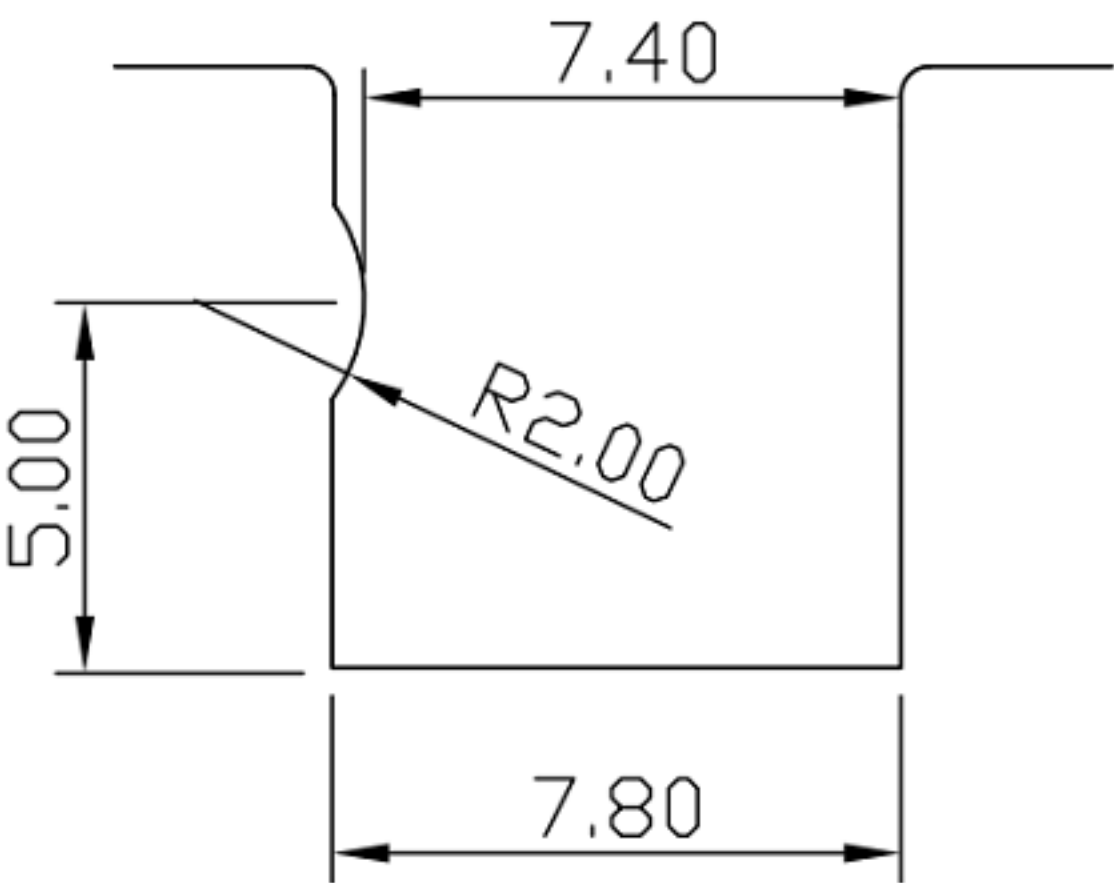

CIRCUIT

(PUSH OFF)

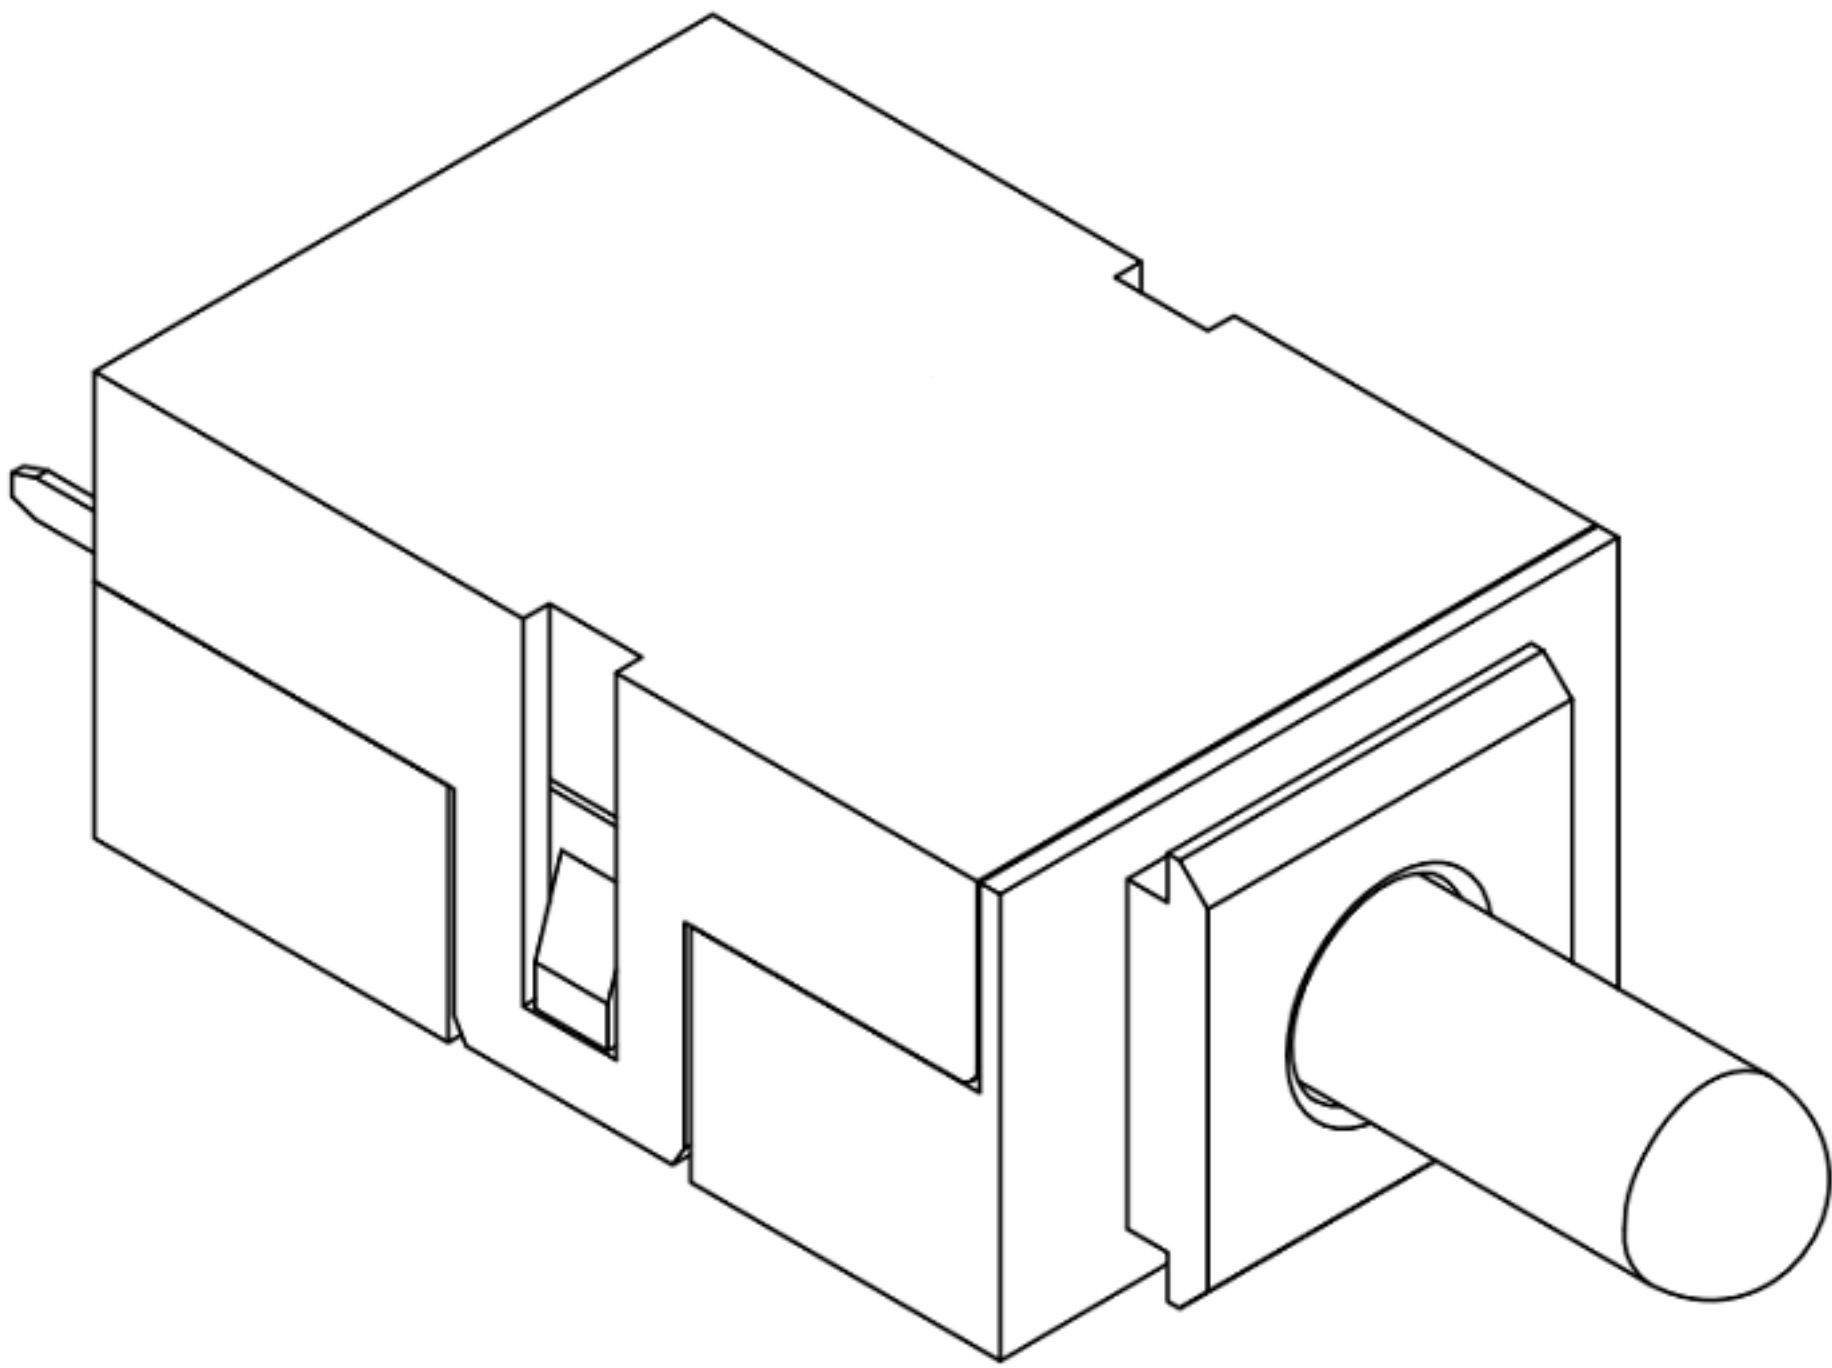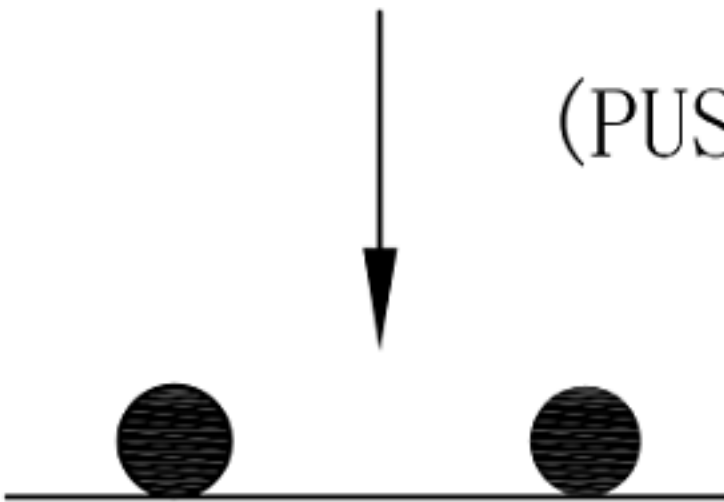

SPECIFICATIONS:

- CONTACT RATING:20VAC/VDC 0.4A Max
- CONTACT RESISTANCE: 50mΩ Max
- INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
- DIELECTRIC STRENGTH: 500VAC(50/60Hz) FOR 1MIN
- MECHANICAL LIFE:100,000 make-and-break cycles
- OPERATION FORCE:300g Max.
- ACTUATION TRAVEL:1.2mm Max
- TOTAL TRAVEL: 10.0±0.8mm
- WAVE SOLDERING: Recommended Soldering
- Temperature 260° ±5°
- Duration of Solder Immersion: 5 Seconds max. (PCB is 1.6mm)

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版	ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Detector Switch			UNIT : mm	DRWG NO.: XB-RS-PB238-D
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-RS-PB238-D			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					