

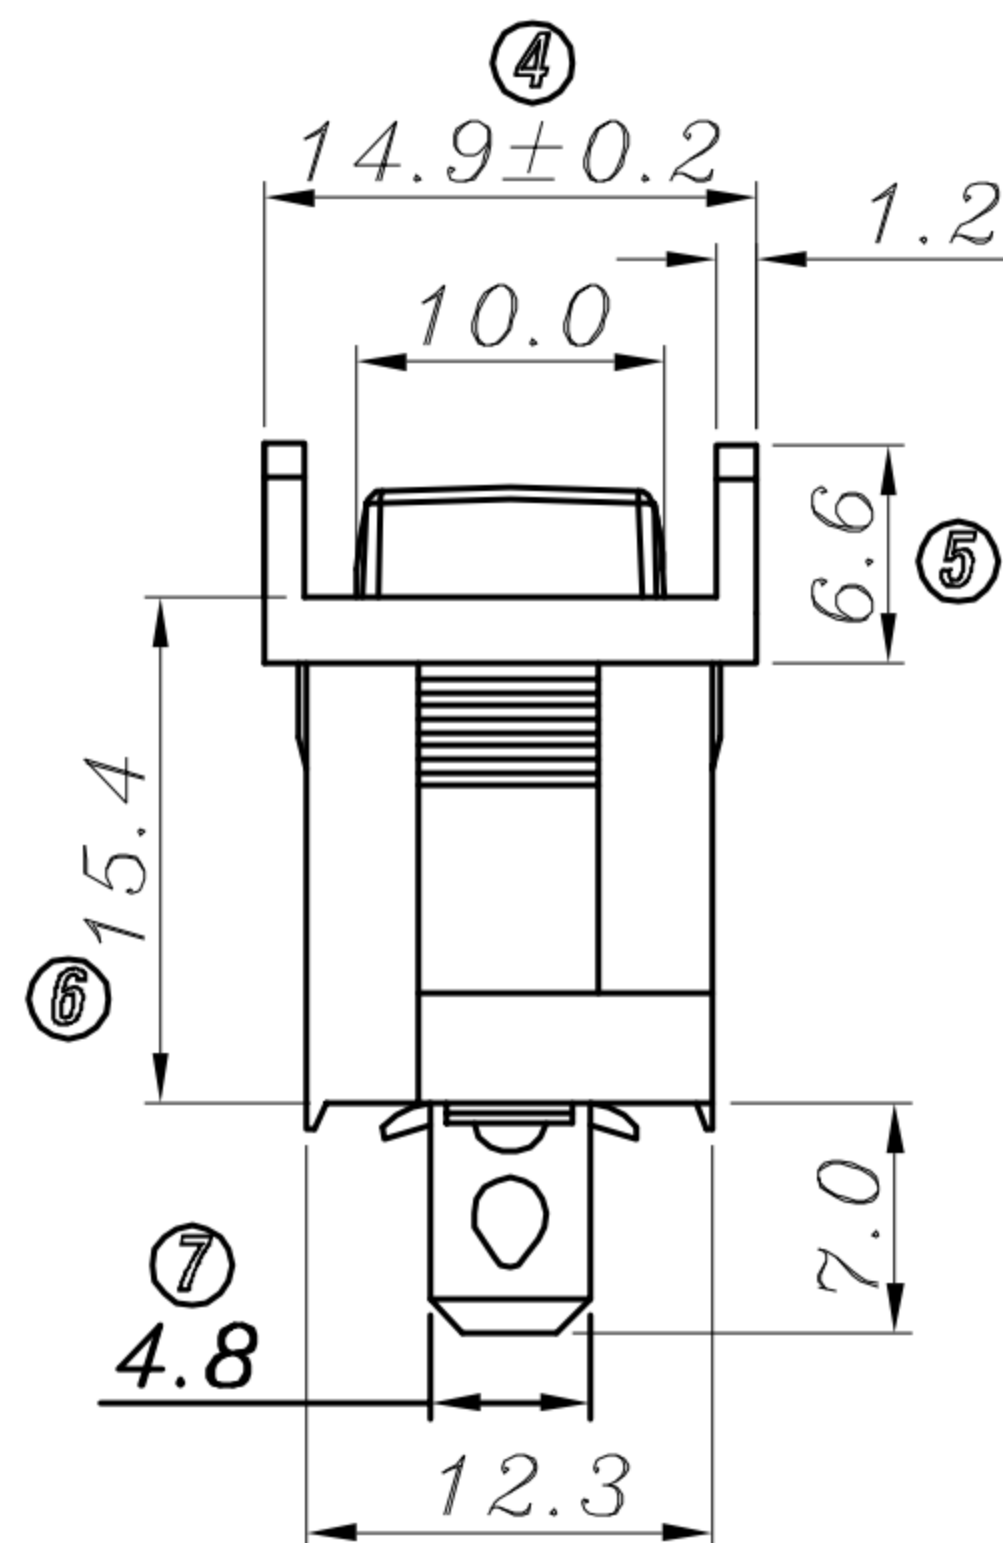
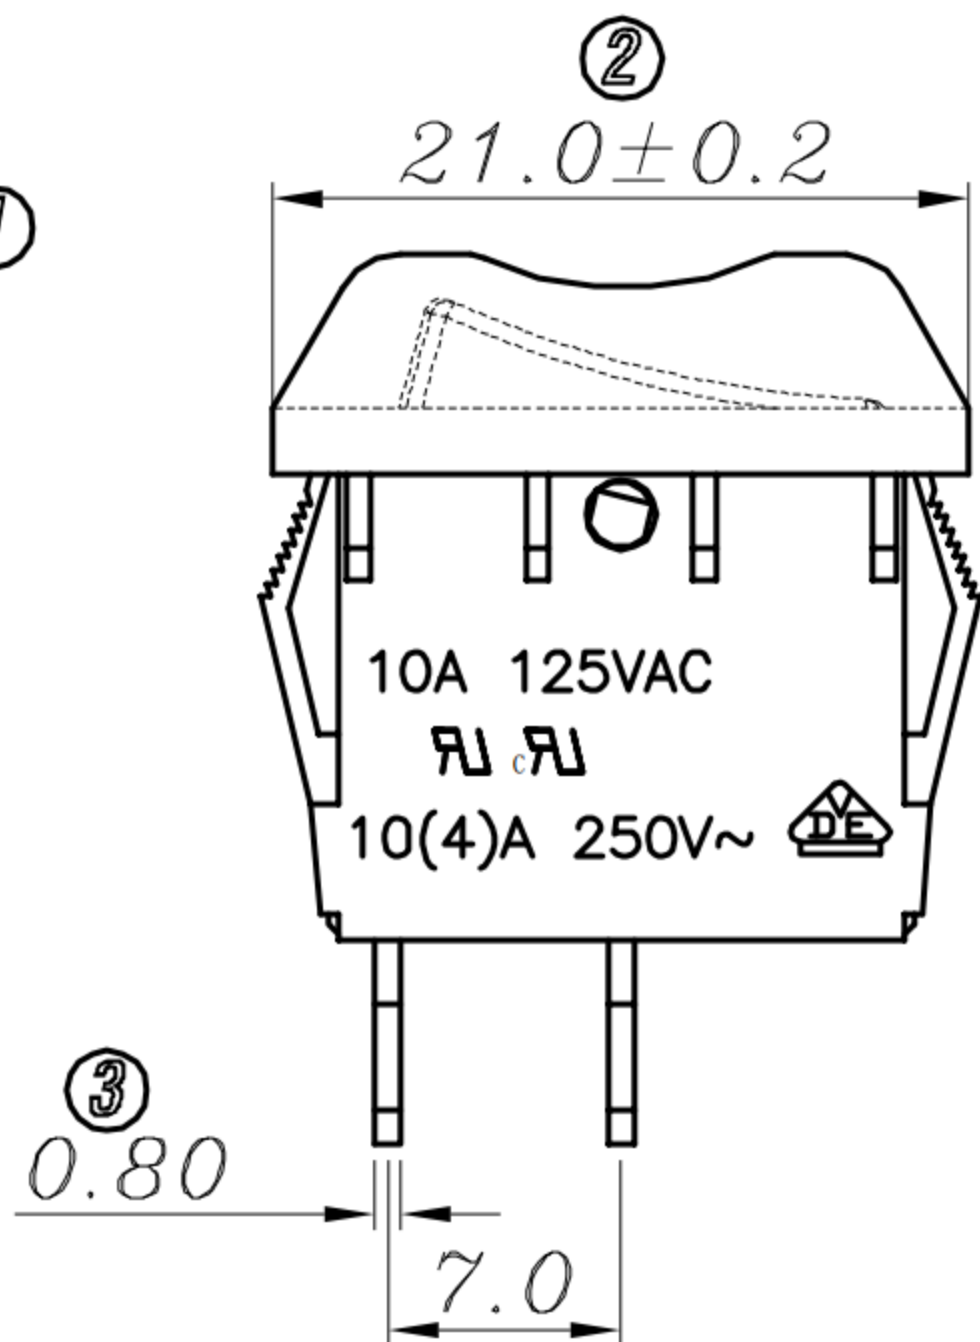


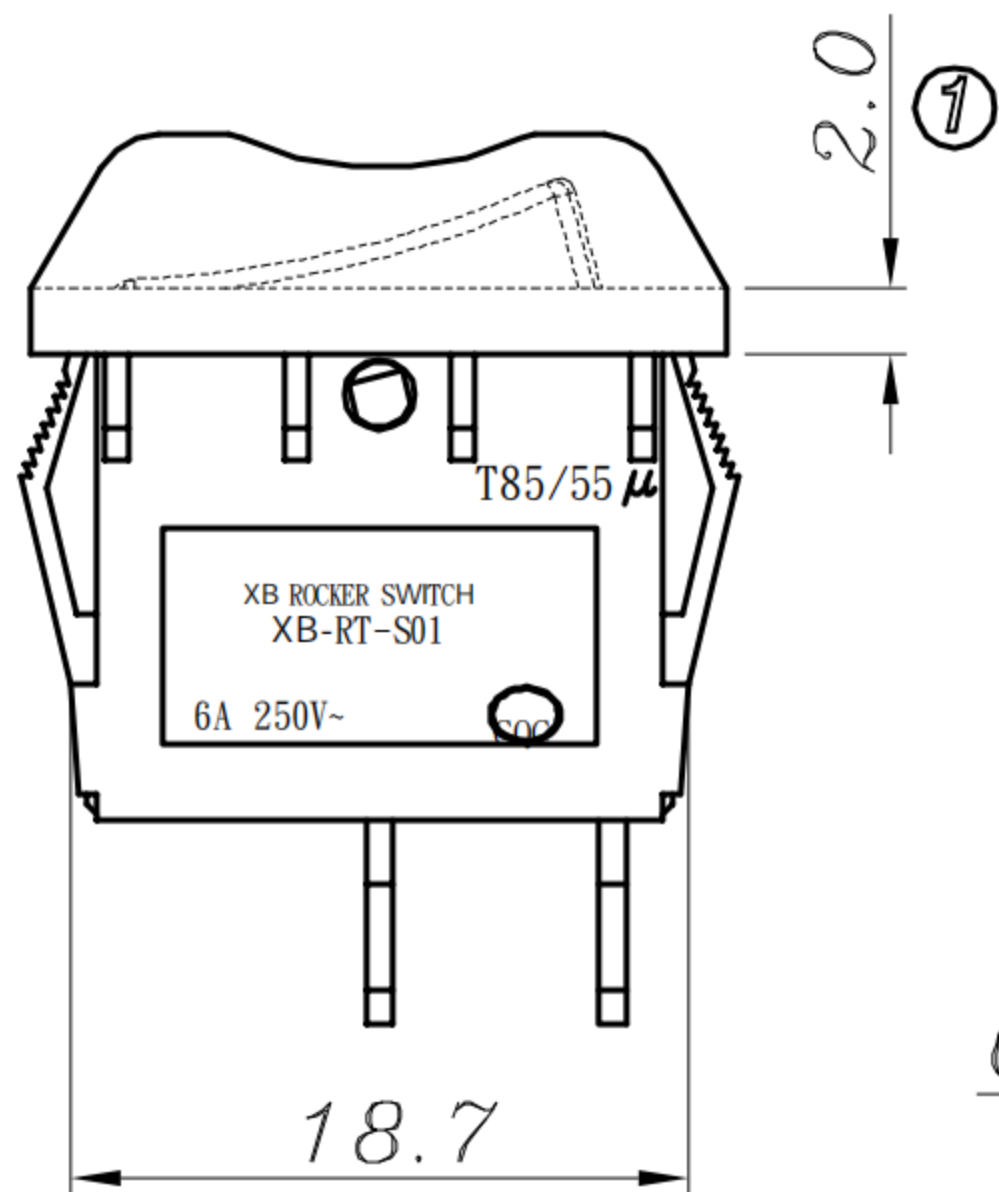




CAD FILE:

ROHS

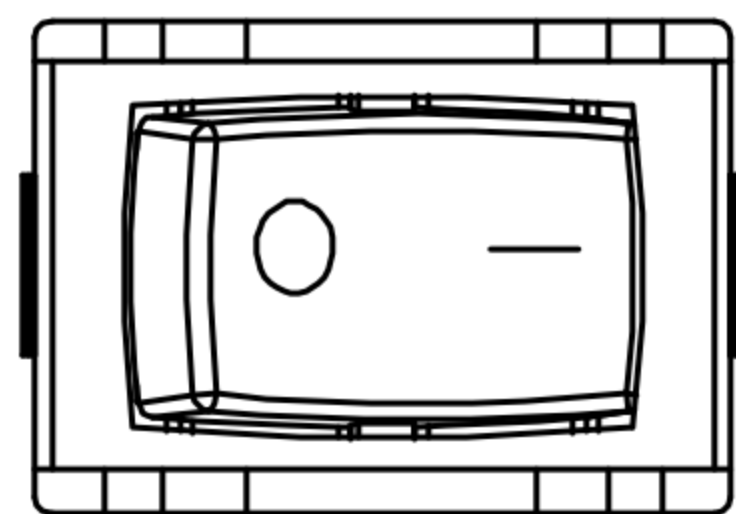

- NOTES:
- 1.Circuit: ON/OFF
 - 2.Operation farce: 500±200gf
 - 3.Electrocal rating: 10(4)A 250V~ VDE
10A 125V~ UL CUL CQC
6A 250V~ UL CUL CQC
 - 4.Contact resistance: <50mΩ
 - 5.Insulation resistance: >100MΩ (500VDC
between open contacts)
 - 6.Dielectric strength: >1500VAC 0.5mA 1 mintute
 - 7.Color: cover is black, body is black

Circuit of Switch

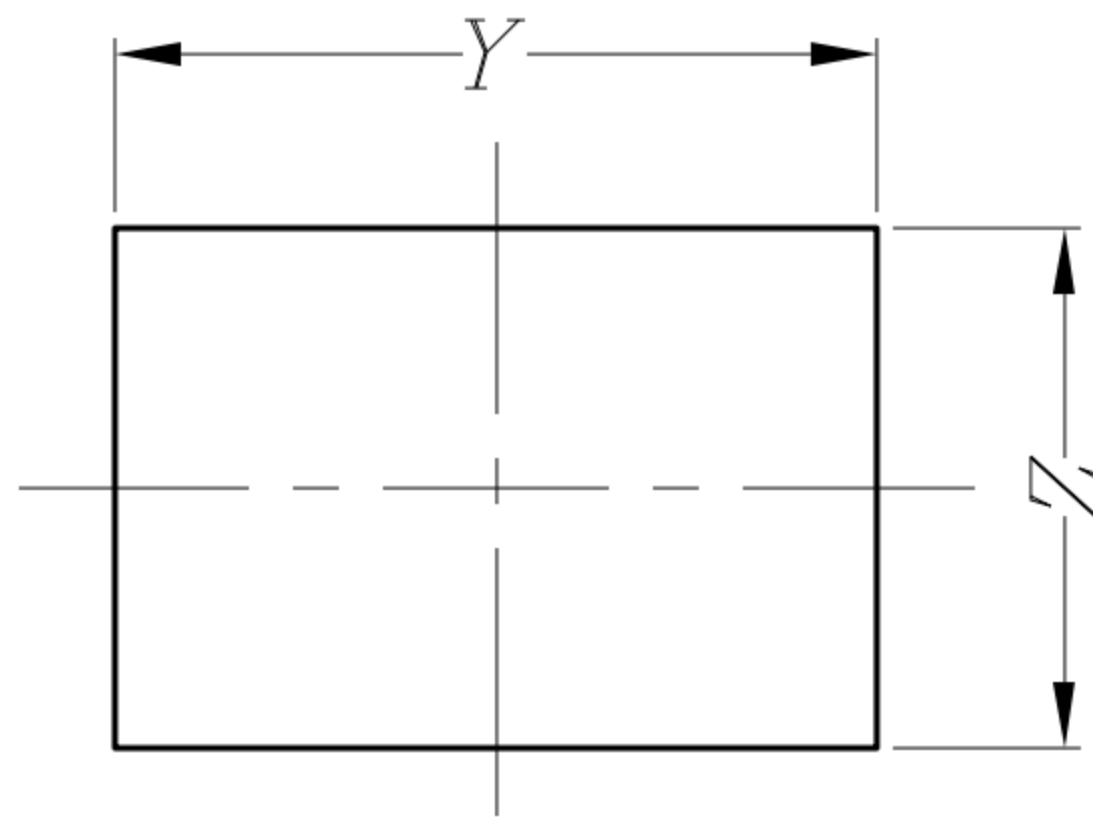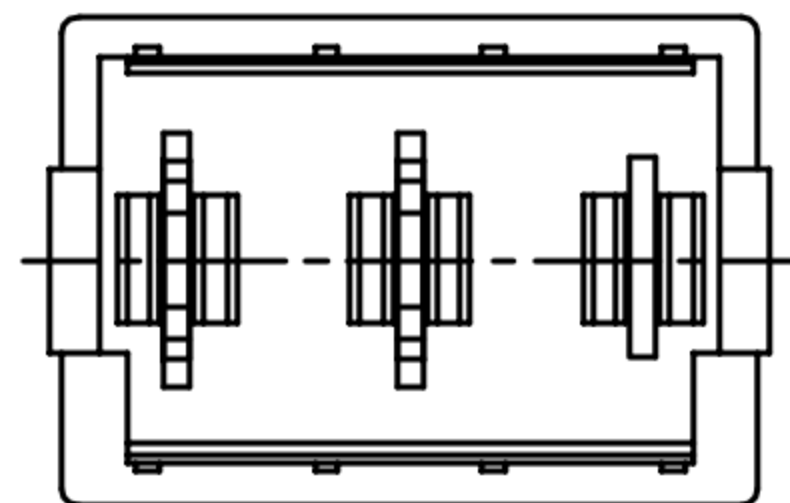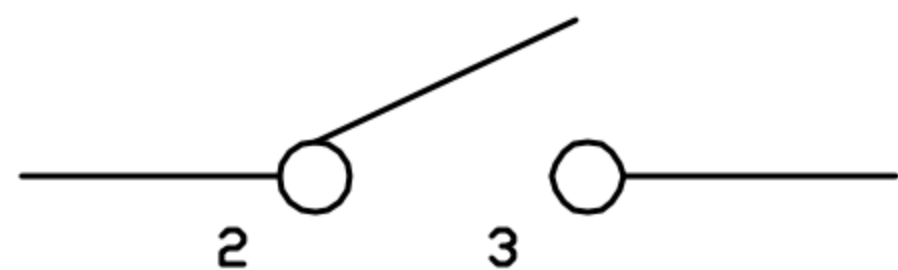

Panel cut - out:

X	Dim.Y	Dim.Z
0.75~1.25mm	19.20+0.1/-0	12.80+0.1/-0
1.25~2.0mm	19.30+0.1/-0	12.80+0.1/-0

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Rocker Switch			UNIT : mm	DRWG NO XB-RT-S01-113-L
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-RT-S01-113-L			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.				