
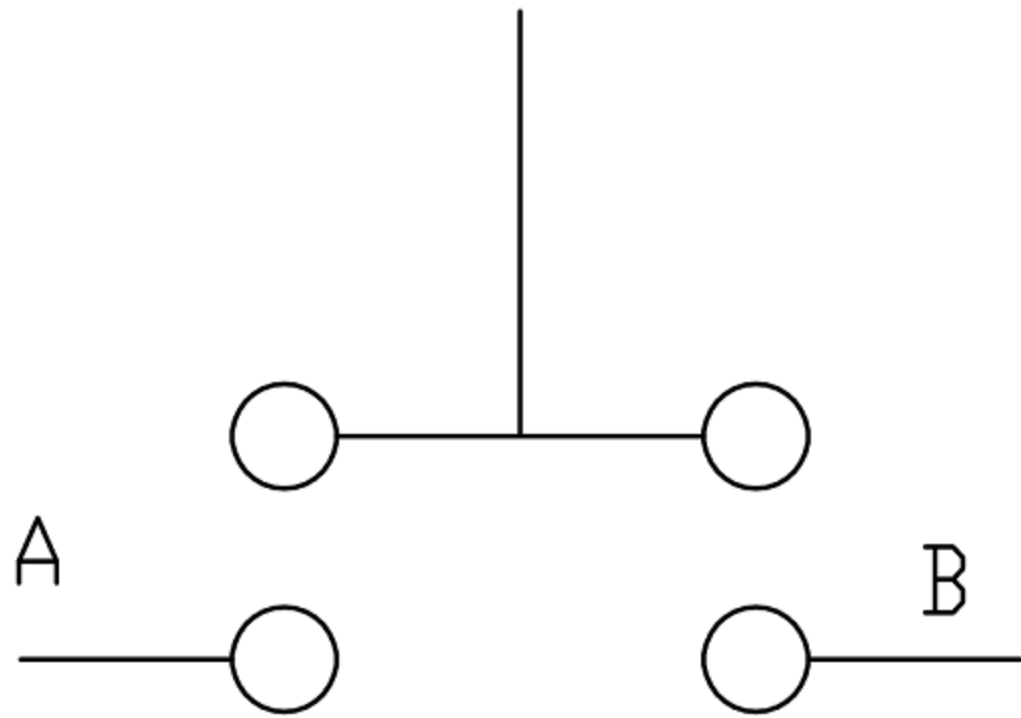
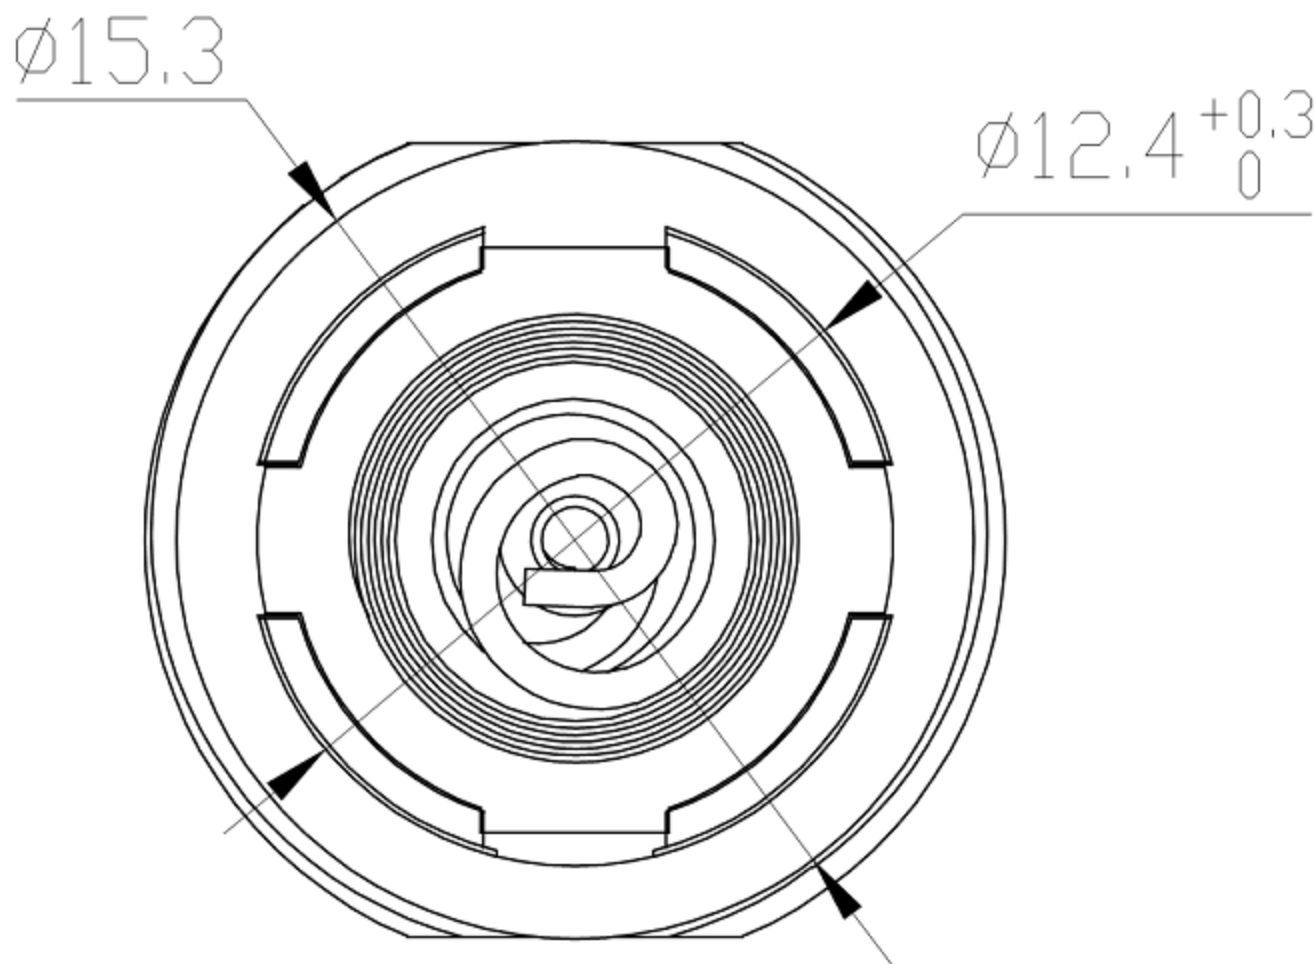
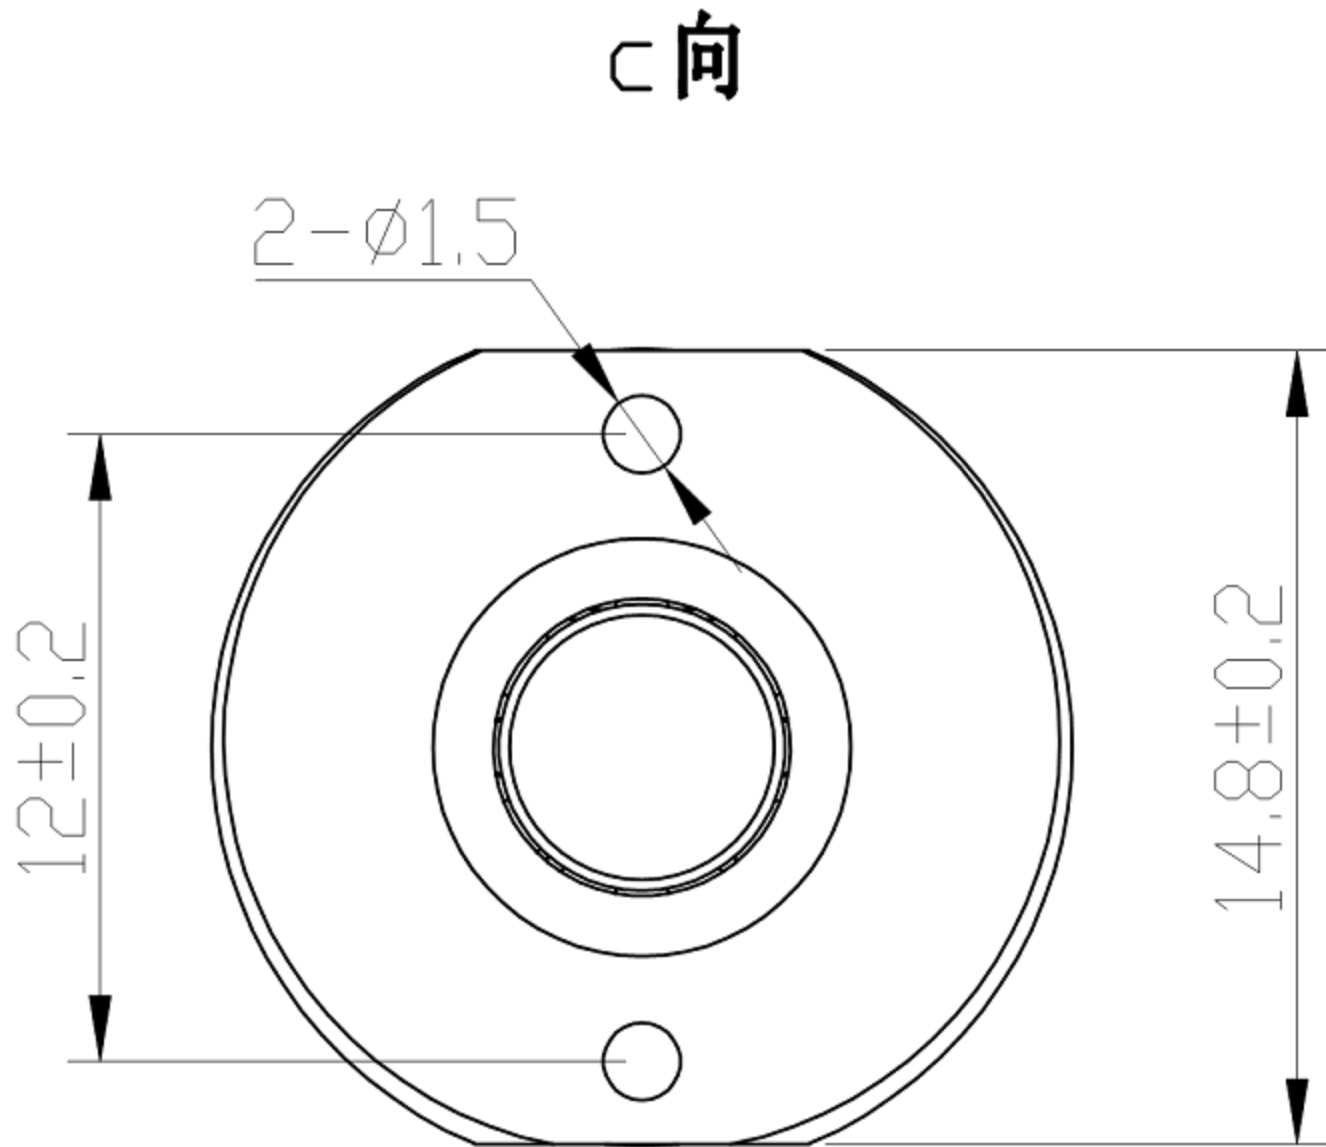


CAD FILE:

ROHS

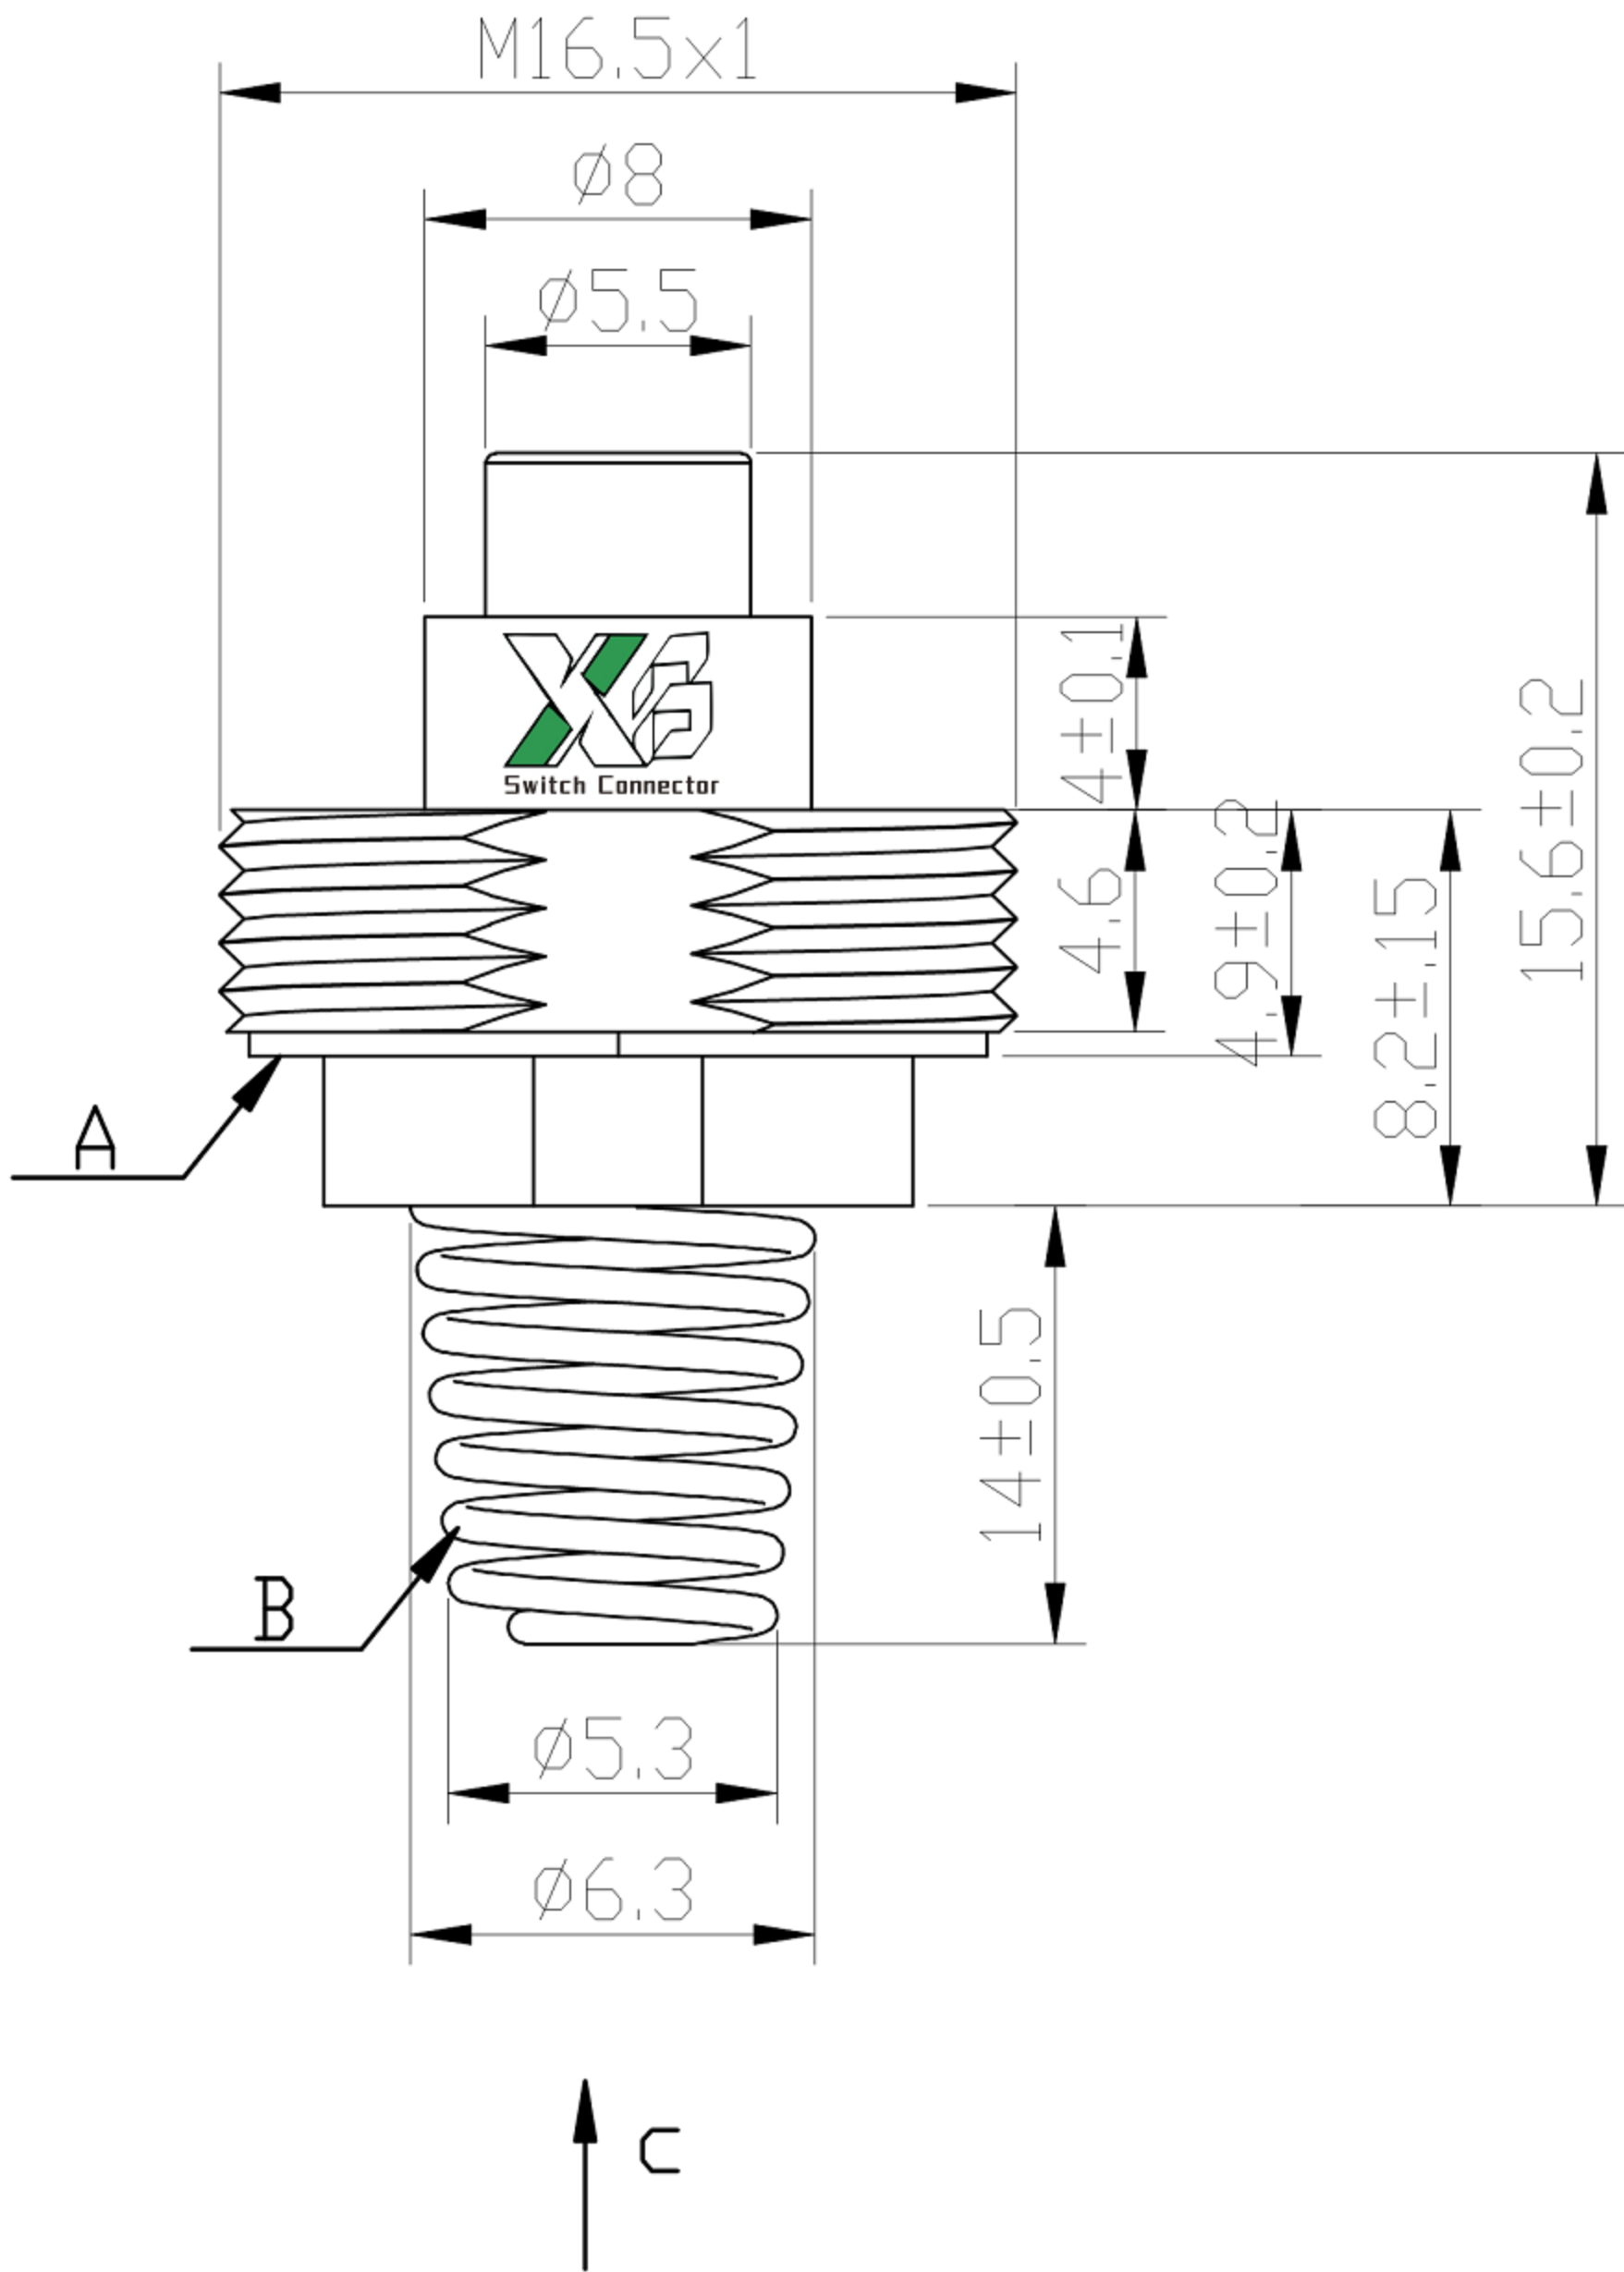

ON-OFF

主要技术参数:

使用温度Temperature	-25℃~70℃
接触电阻Contact Resistance	≤100mΩ
绝缘电阻Insulation Resistance	DC500V 100MΩ
额定负荷Rated Load	DC 30V 3A
耐压Withstand Voltage	AC500V(50Hz)/min
动作力Press and Return Force	450gf±150gf
机械寿命Life	10000次

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Push Switch MODEL: XB-YT-1502T  东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.	UNIT : mm		DRWG NO.: XB-YT-1502T		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED		SCALE: 5:1		DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED		CHK'D		DONG. PANG		2012-9-25
1	KNOB	PPA	1	BLACK		APPD.		ZENQ. CHEN		2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH						