

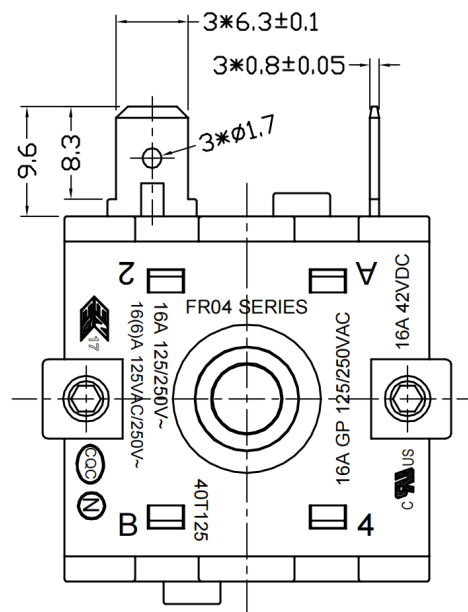
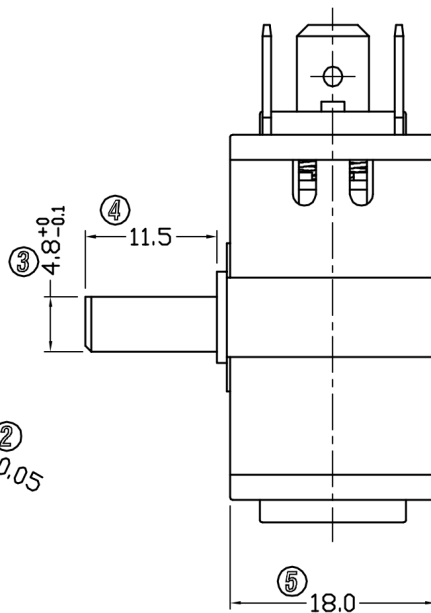





1. 额定值 RATING: 16A 125/250VAC 40T125 (UL,CUL; ENEC17; N; CQC)
16(6)A 125/250VAC 40T125 (UL,CUL; ENEC17; N; CQC)
16A 42VDC 40T125 (UL,CUL; ENEC17; N; CQC)
2. 功能 FUNCTIONAL: 见电路图 SEE CIRCUIT DESCRIPTION
3. 接触电阻 CONTACT RESISTANCE: <50mΩ
4. 绝缘电阻 INSULATION RESISTANCE: >100MΩ (500VDC BETWEEN OPEN CONTACTS)
5. 耐电压 DIELECTRIC STRENGTH: >1500VAC 0.5mA 1 MINUTE

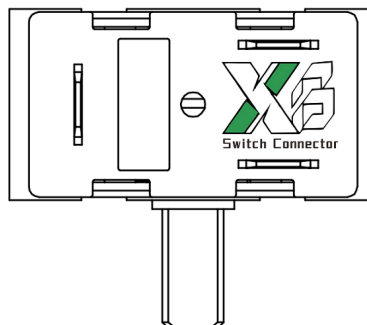

8				TOLERANCE UNLESS SPECIFIED						
7										
6				WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版			ZENQ. CHEN
5				OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : 电源旋转开关		UNIT : mm	DRWG NO.: XB-FR04-201B3Q16L-R		
3	CASE	PPA/BASS SRTP	1	BLACK/Ag PLATED	MODEL: Power Rotary Switch		SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司		CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK	Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.		APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH						