

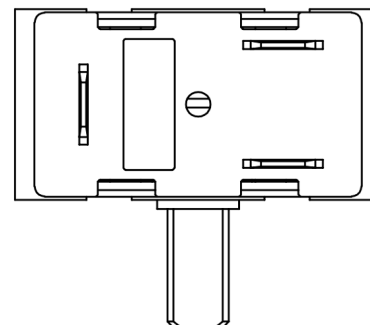
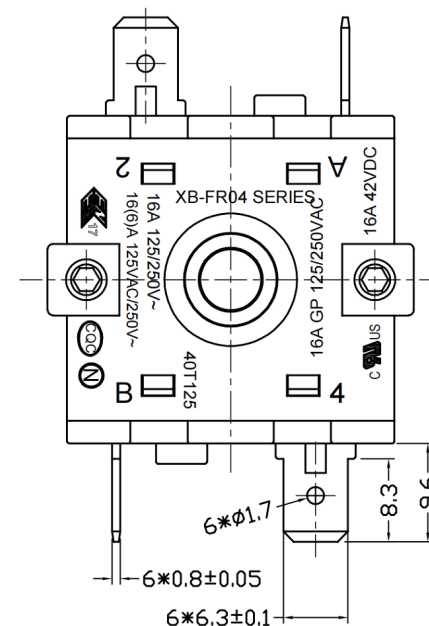
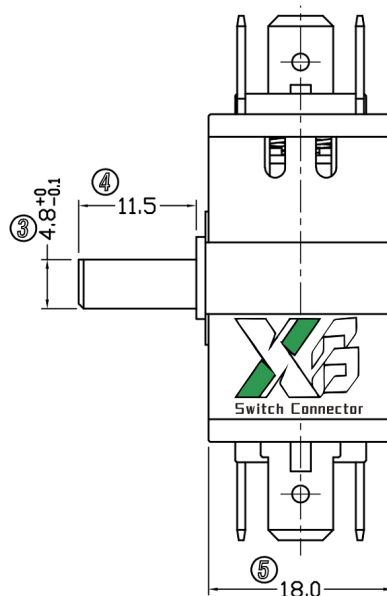


CAD FILE:

ROHS

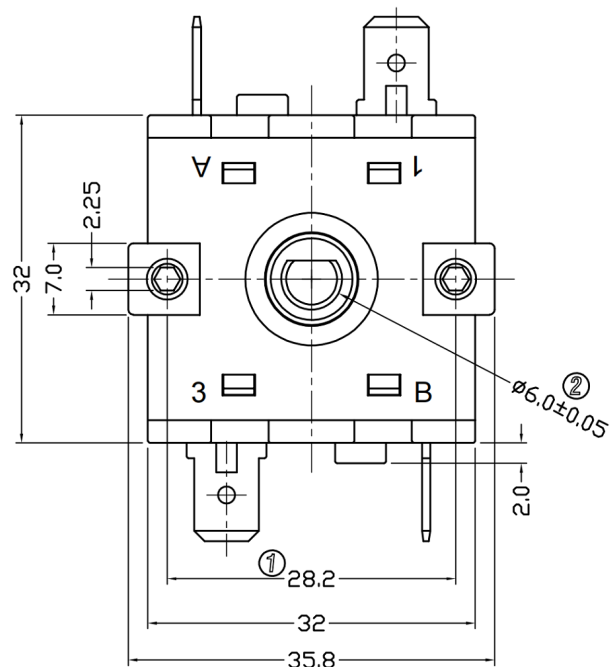

NOTES:

1. 额定值 RATING: 16A 125/250VAC 40T125 (UL, C-UL; ENEC17; N; CQC)
26(6)A 125/250VAC 40T125 (UL, C-UL; ENEC17; N; CQC)
16A 42VDC 40T125 (UL, C-UL; ENEC17; N; CQC)
2. 功能 FUNCTIONAL: 见电路图 SEE CIRCUIT DESCRIPTION
3. 接触电阻 CONTACT RESISTANCE: <50mΩ
4. 绝缘电阻 INSULATION RESISTANCE: >100MΩ (500VDC BETWEEN OPEN CONTACTS)
5. 耐电压 DIELECTRIC STRENGTH: >1500VAC 0.5mA 1 MINUTE

8					TOLERANCE					
7					UNLESS SPECIFIED					
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版		ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : 电源旋转开关			UNIT : mm	DRWG NO.: XB-FR04-322B3Q16L-R	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: Power Rotary Switch			SCALE: 5:1	DWN. JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO., LTD.					