

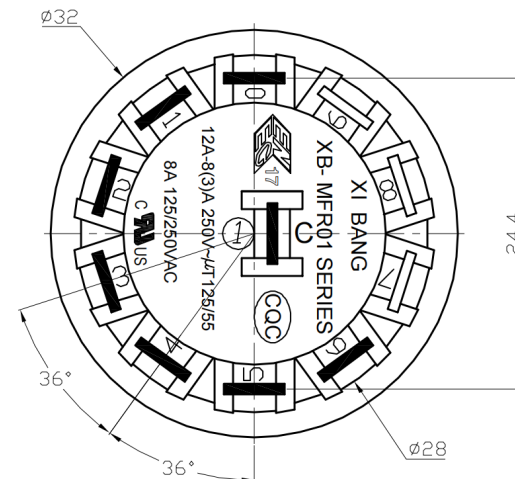
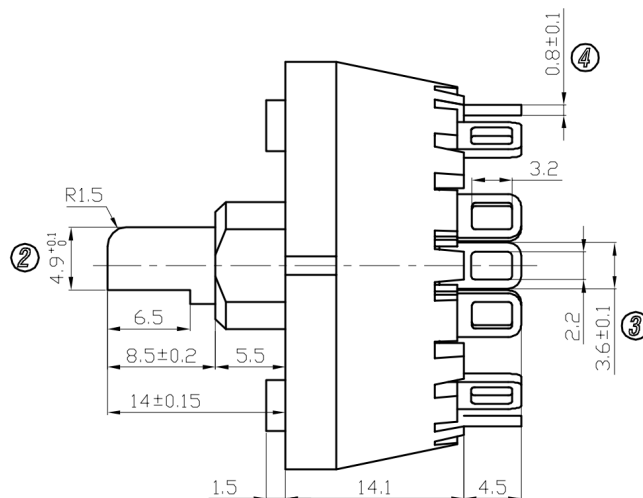


CAD FILE:


ROHS

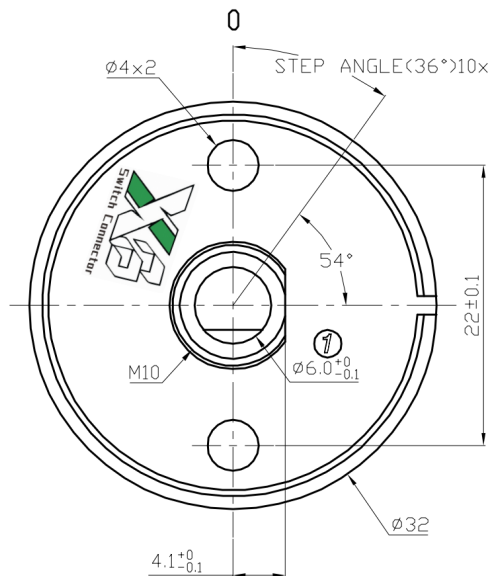


螺母配件



CIRCUIT DIAGRAM

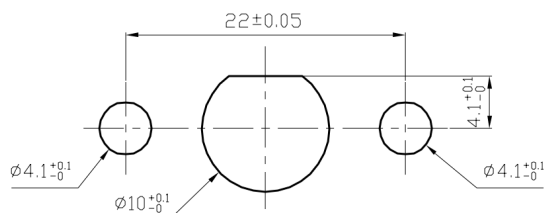

PANEL CUTOUT

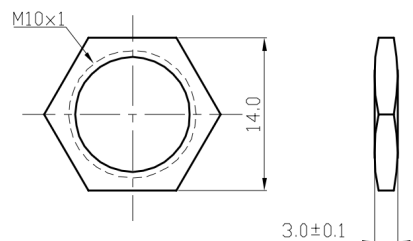

- 额定值 RATING: 8A 125/250VAC(UL, C-UL)
12A-8(3)A 250V~ μ T125/55(ENEC-17, CQC, CB)
- 功能 FUNCTIONAL: 见电路图 SEE CIRCUIT DESCRIPTION
- 接触电阻 CONTACT RESISTANCE: <50m Ω
- 绝缘电阻 INSULATION RESISTANCE: >100M Ω
(500VDC BETWEEN OPEN CONTACTS)
- 耐电压 DIELECTRIC STRENGTH: >1500VAC 0.5mA 1 MINUTE
- 所有部件均使用环保材料
ALL MATERIALS USE IN CONFORMIY WITH THE RoHS DIRECTIVE

8					TOLERANCE							
7					UNLESS SPECIFIED							
6					WITHIN 1.5mm : ±0.1mm		A	2012-9-25	初 版			
5					OVER 1.5mm : ±0.2mm		ISSUE	DATE	DESCRIPTIONS OF REVISION			
4	CONTACT	SUS	1	Ag CLAD	TITLE : 电源旋转开关				UNIT : mm	DRWG NO.: XB-MFR01-A1F06L1S-B		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: Power Rotary Switch				SCALE: 5:1	DWN.	JUN. YANG	
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司				CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK					DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
NO.	PARTS	MATERIALS	Q'TY	FINISH								