





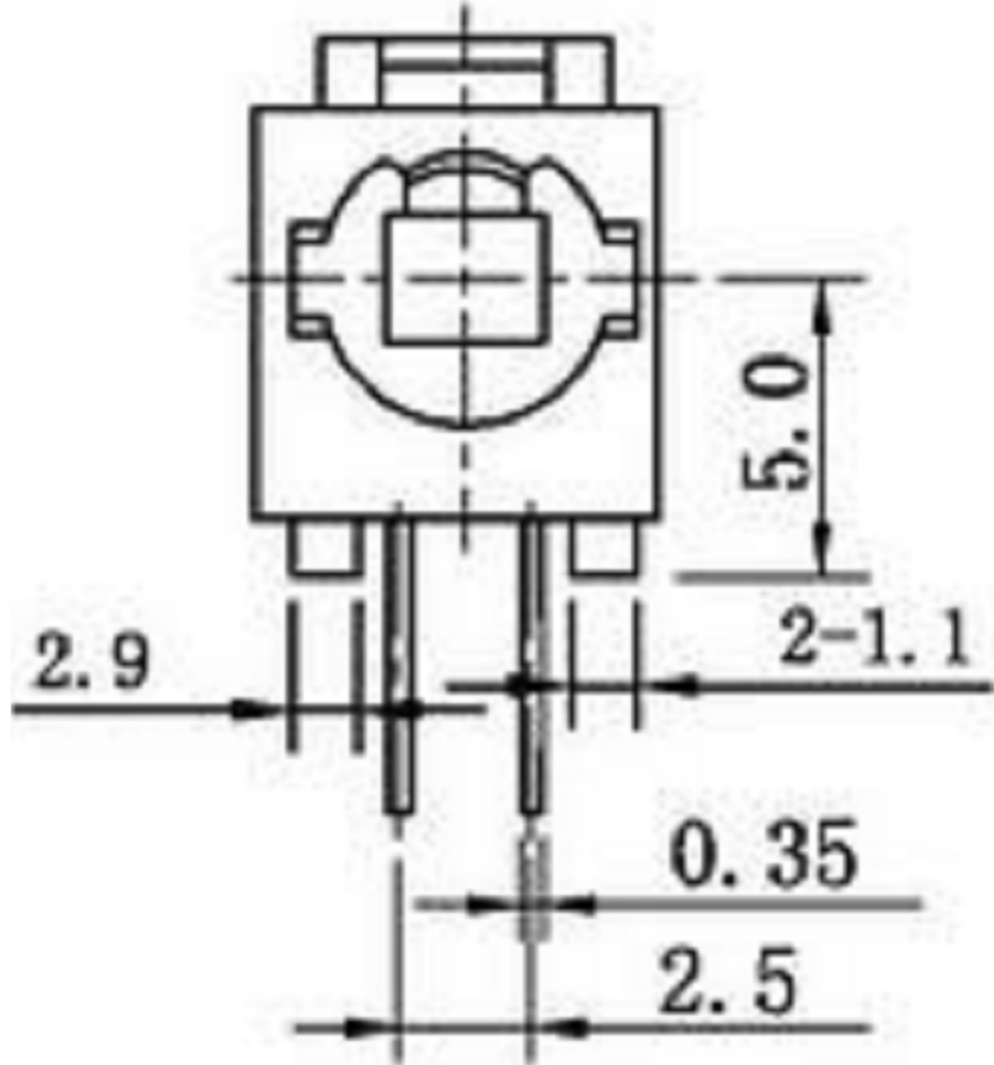


CAD FILE:

ROHS

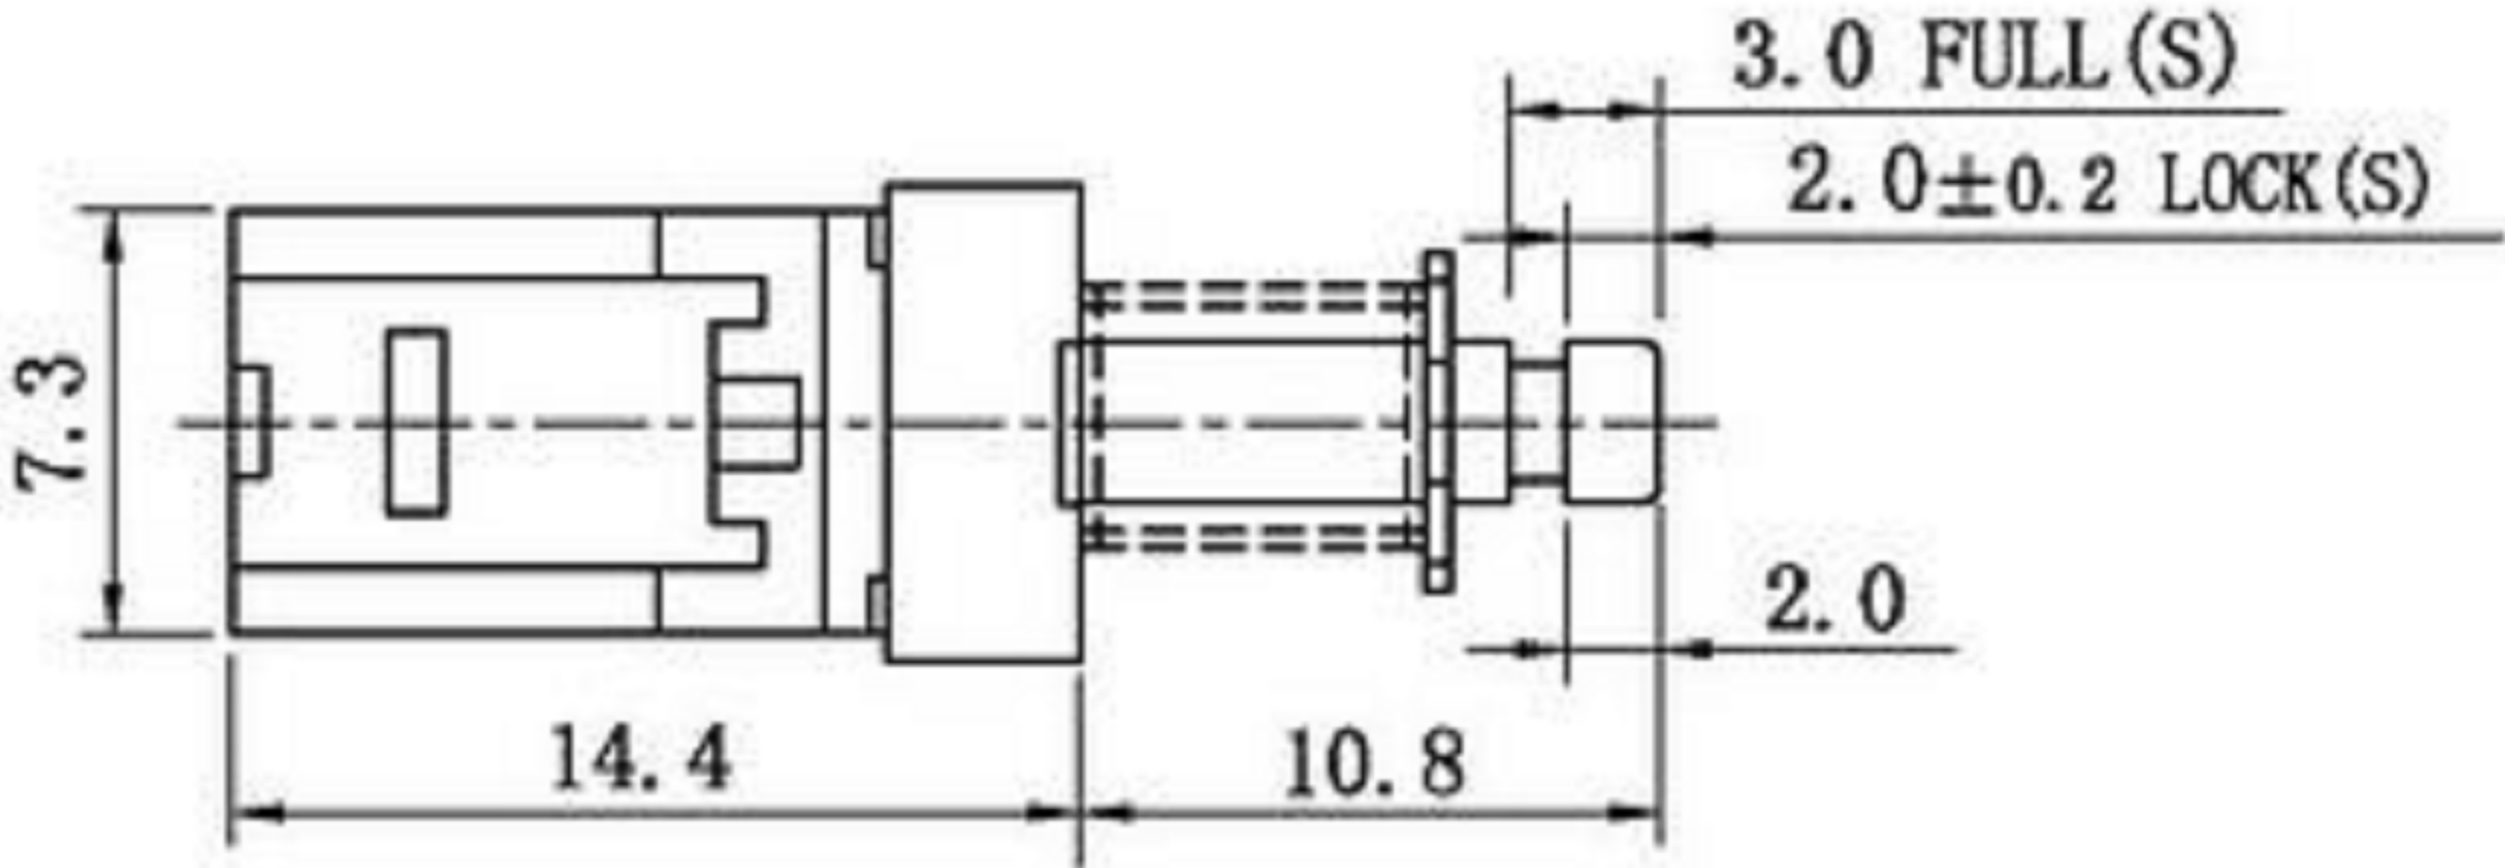

P. C. B HOLE DETAIL

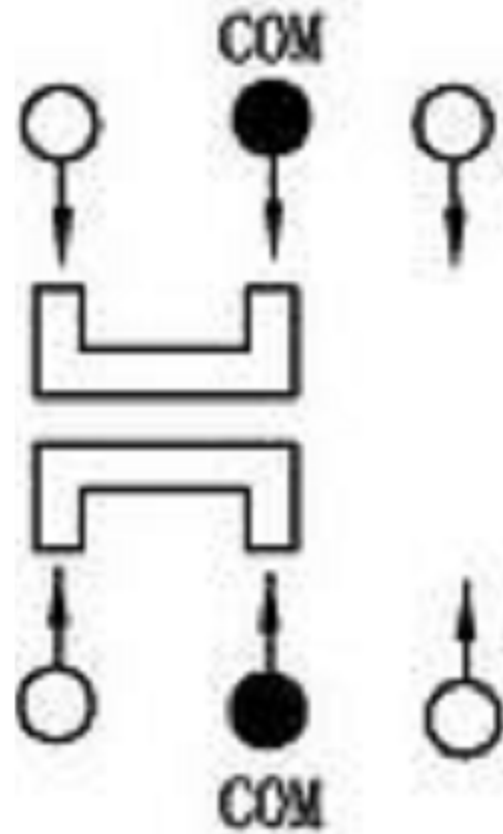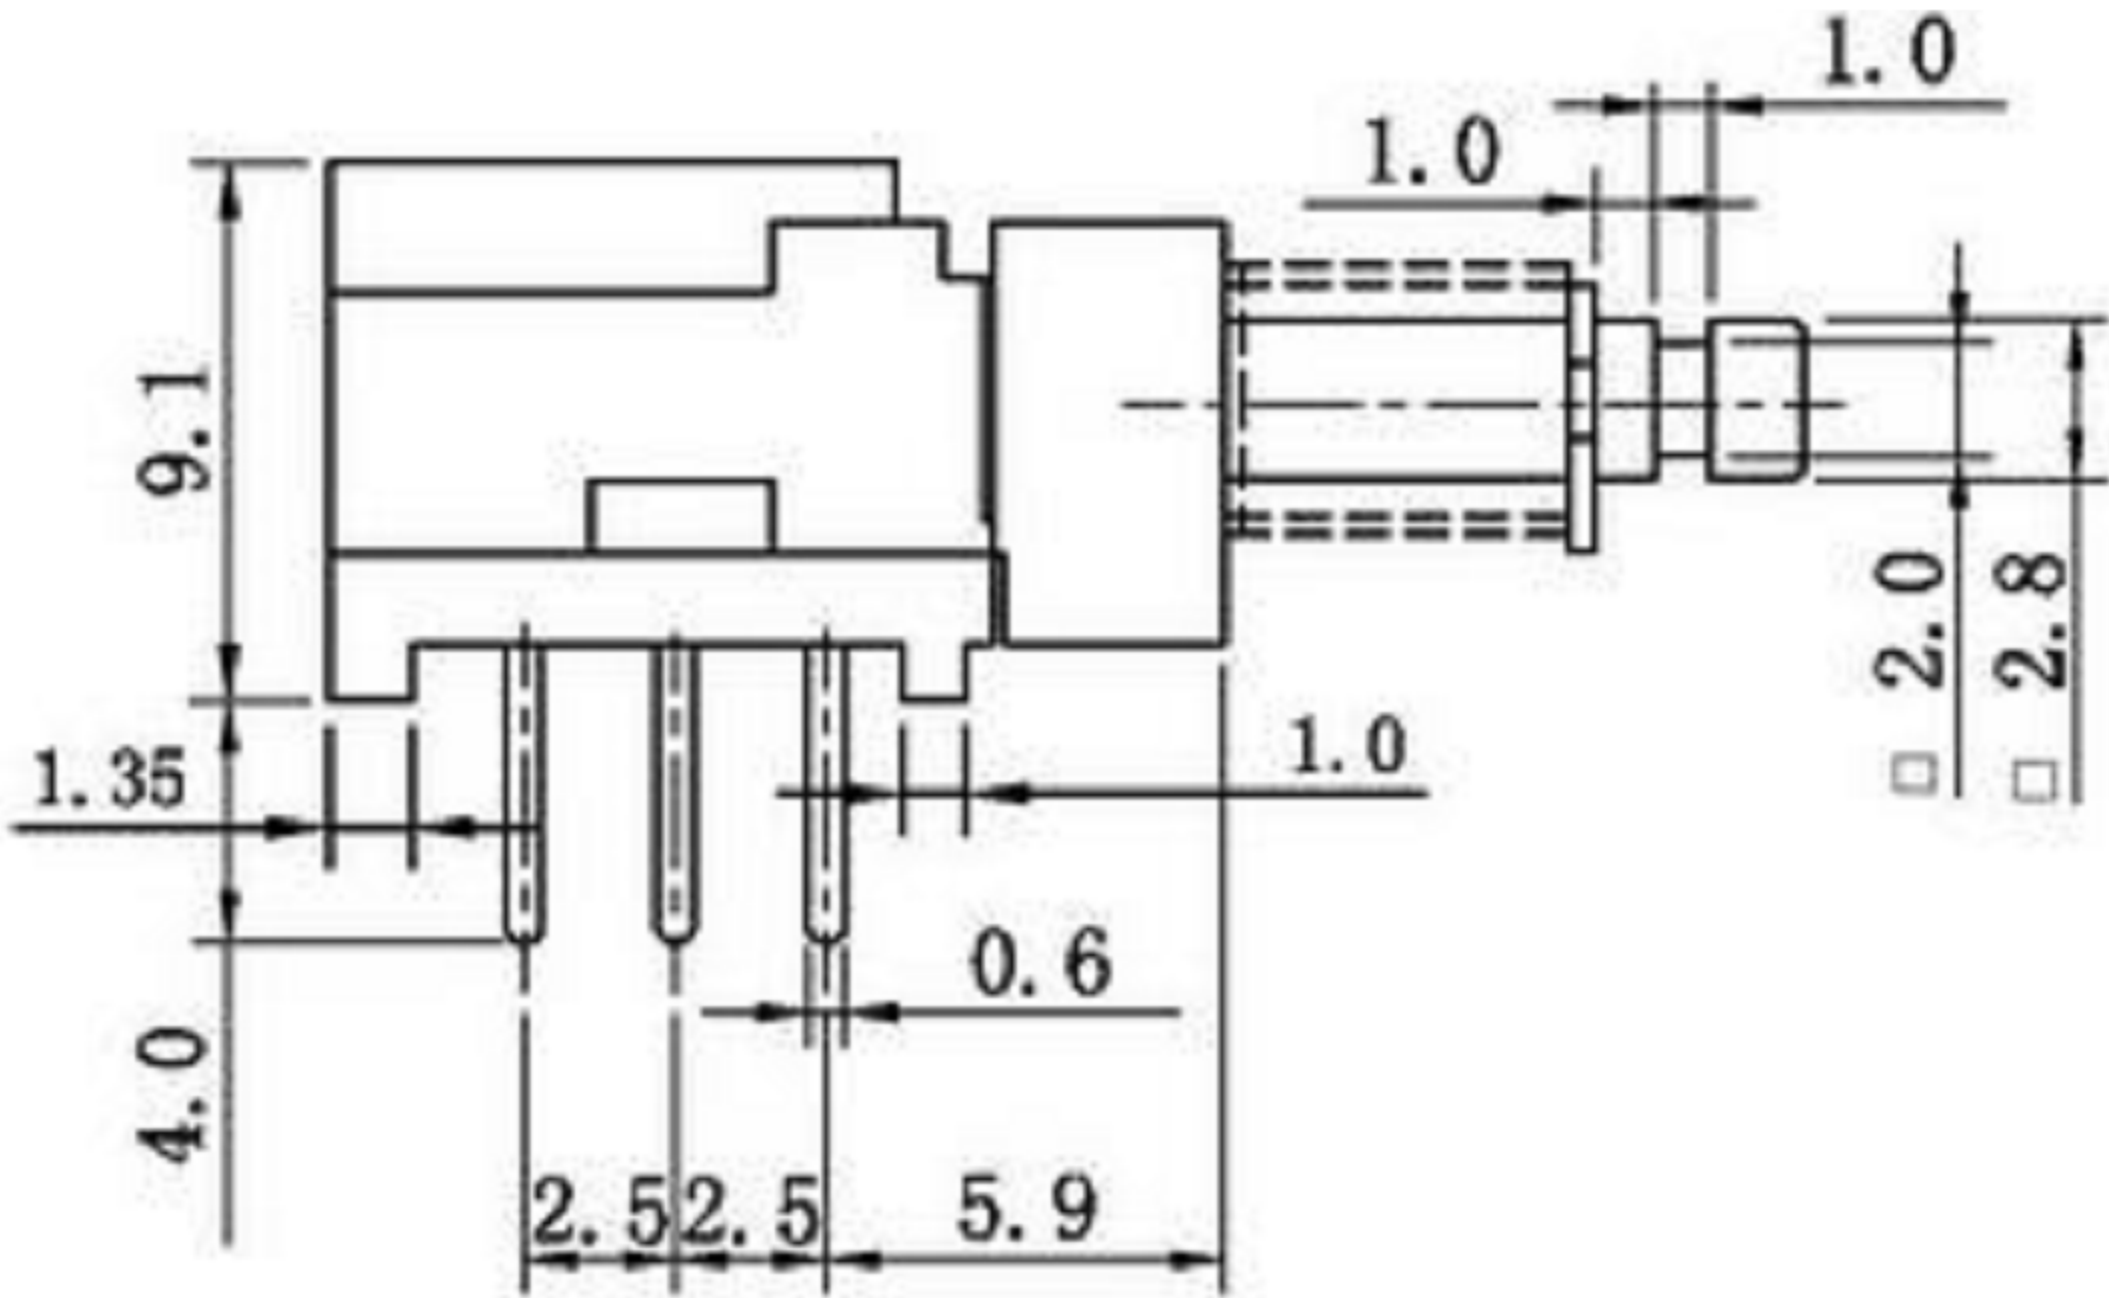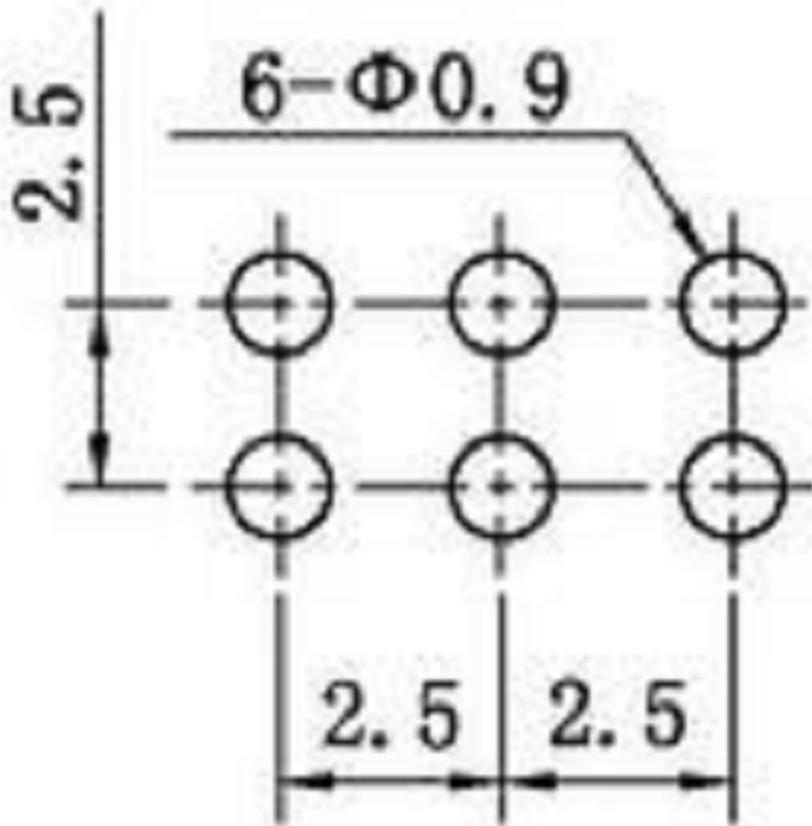

SCHEMATIC

类 型	小直键开关	品 名	
1. 功能规格			
1.1额定电压	DC30V	1.6自由位置 (FP)	
1.2额定电流	0.1A	1.7动作位置 (OP)	
1.3接触电阻 (CR)	≤50mΩ (初始值)	1.8行程 (PT)	2.0±0.2mm
1.4操作力 (OF)	230±50gf	1.9灵敏度 (BT)	
1.5回弹力 (RF)		1.10	
2. 可靠度参数			
2.1机械寿命	30,000 cycles	2.5焊接工艺	手工焊
2.2电气寿命	10,000 cycles	2.6适用温度	-20℃ - +70℃
2.3绝缘电阻	≥100MΩ DC250V (初始值)	2.7适用湿度	<85%RH
2.4耐压强度	AC250V 1 minute (初始值)	2.8	

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Push Switch			UNIT : mm	DRWG NO.: XB-PBS-22D06F
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-PBS-22D06F			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.				