




CAD FILE:


ROHS

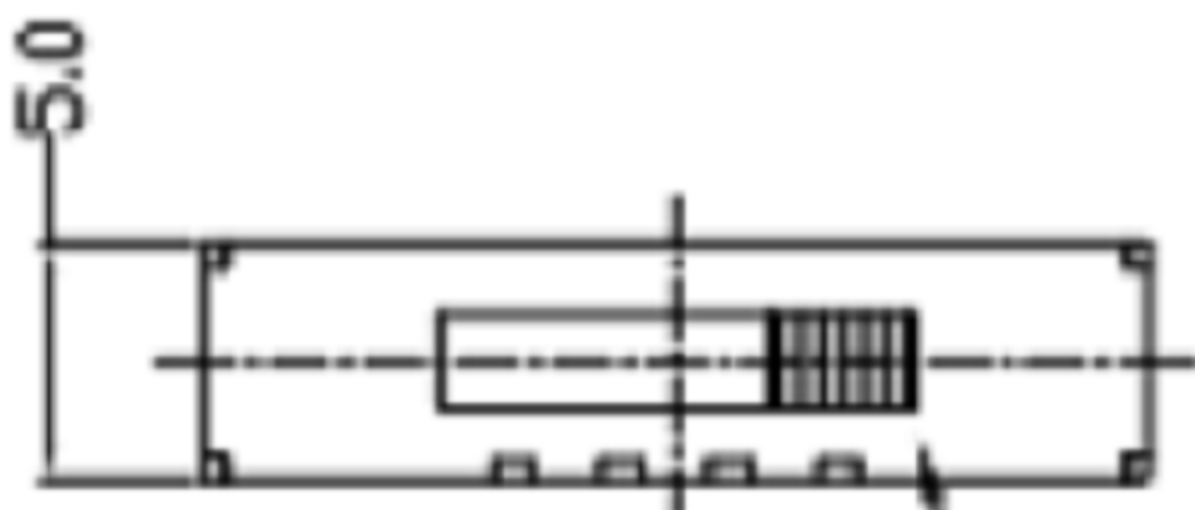



Actuator supplied in position shown

TRAVEL

2.3±0.2(3X)

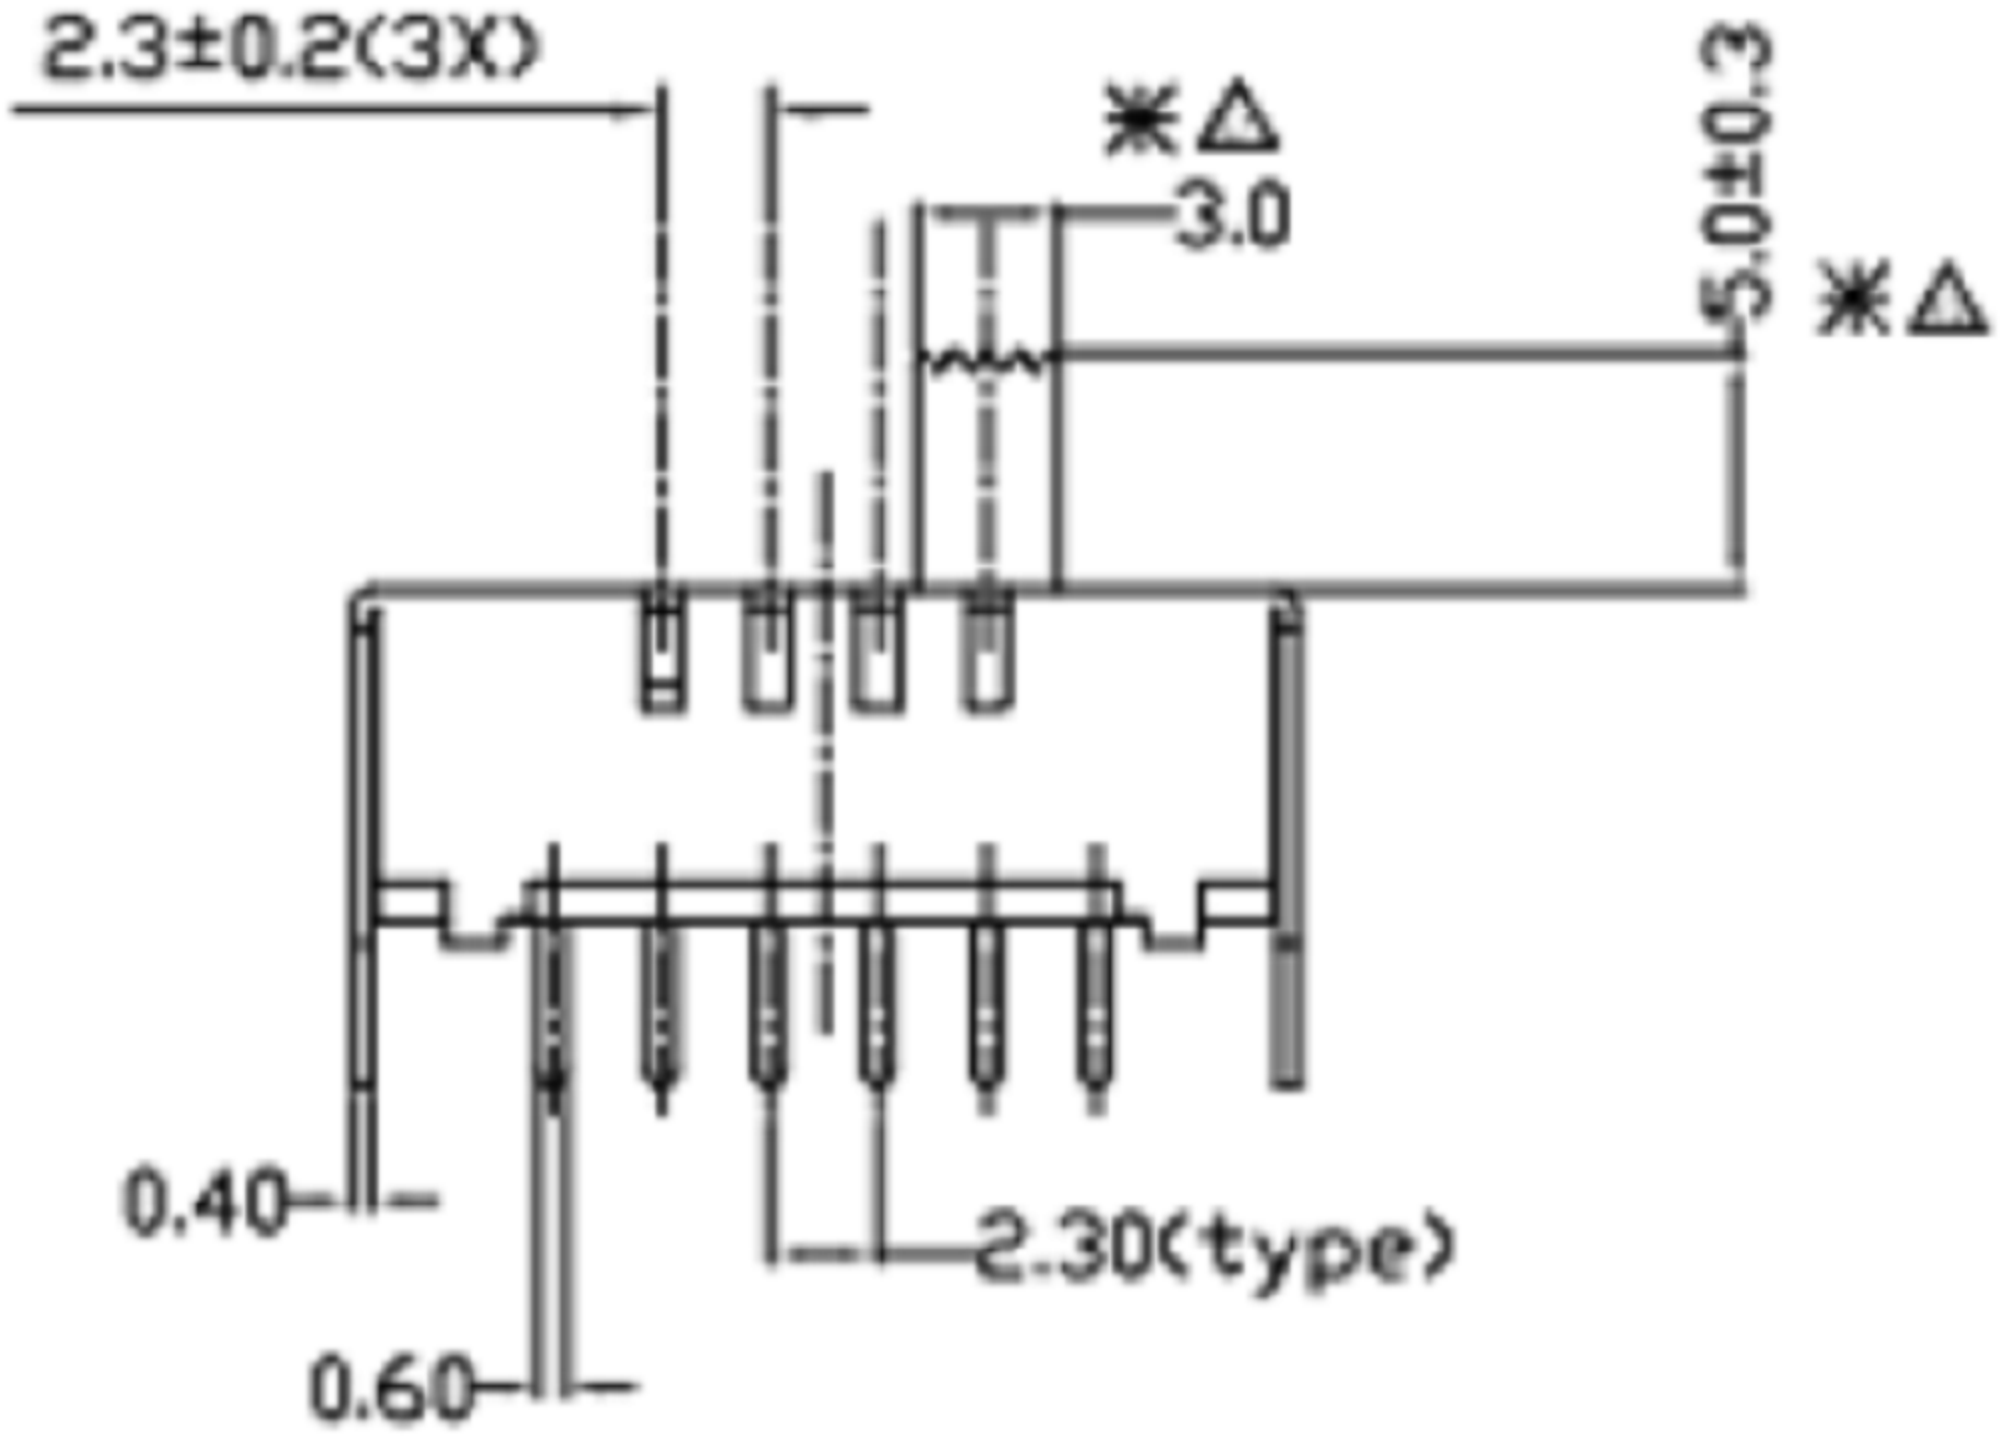

THE DIMENSION MARKED * ARE CQT'S

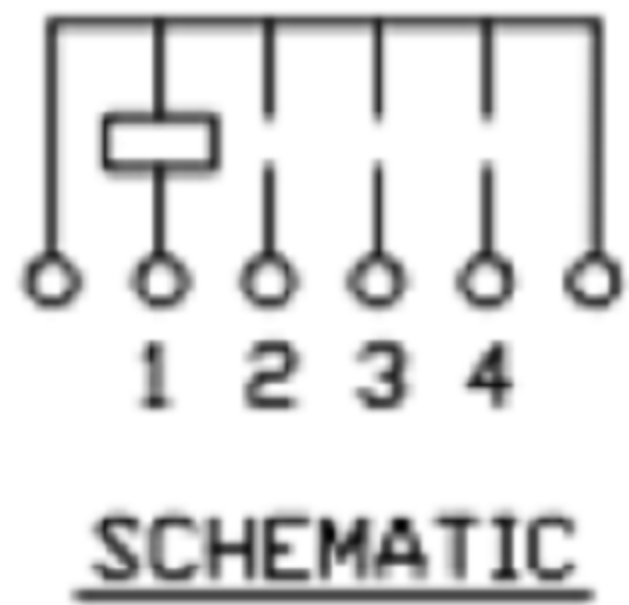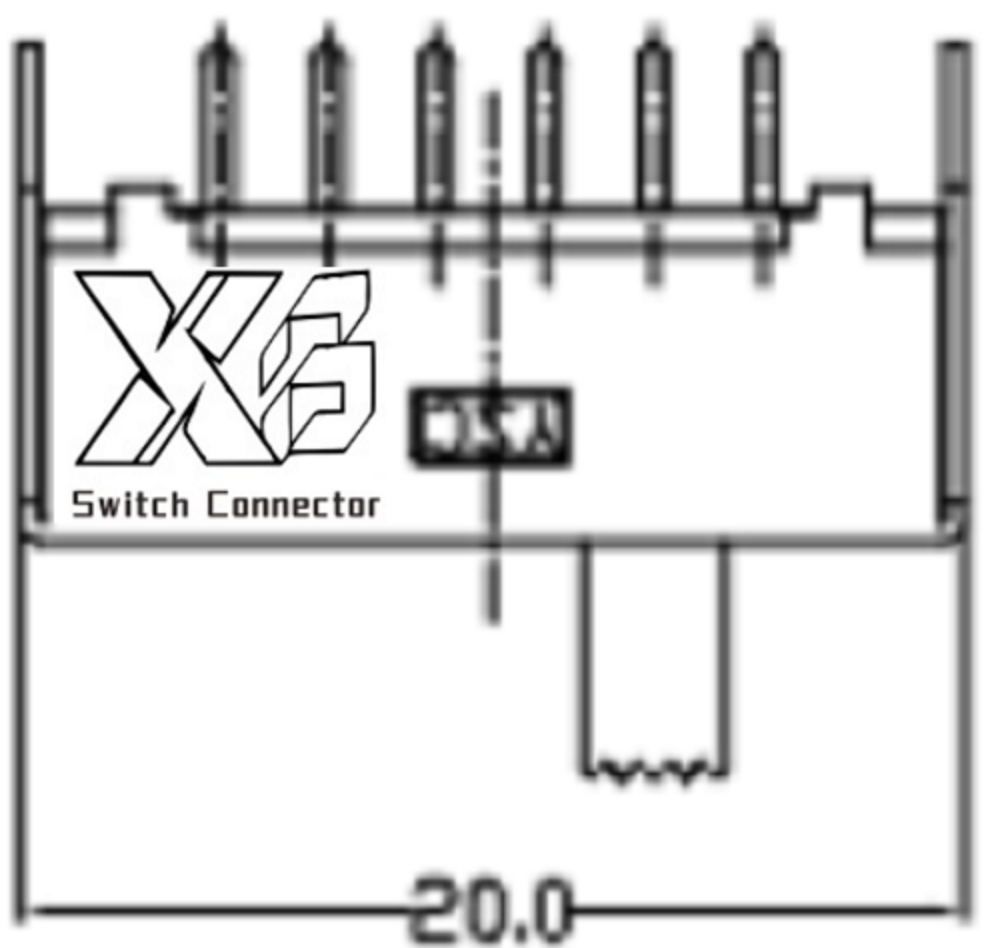

- 1.XB Slide Switch electrical parameters
- 2. Rating : DC 12V 30V 0.3A 0.5A
- 3. Circuit : 1P4T
- 4.Operating gear:4rd gear
- 5. Travel : 2.3mm
- 6. Operating Force : T1-2 : 250±100gf
T2-3 : 250±100gf
T3-4 : 250±100gf
- 7.Contact resistance: 30M Ω
- 8.Withstand voltage: 500V AC for 1 minute
- 9.Handle length: 2.0-10mm
- 10. Terminal : P.C. Board Terminal

- Instructions for bolt inspection:
- 1. The dimensions marked with * are mandatory for CTQ inspection.
 - 2. The material must meet environmental requirements.
 - 3. Note that the rubber head is parked on the right side.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : SLide Switch			UNIT : mm	DRWG NO.: XB-SS-14E03
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-SS-14E03			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					