

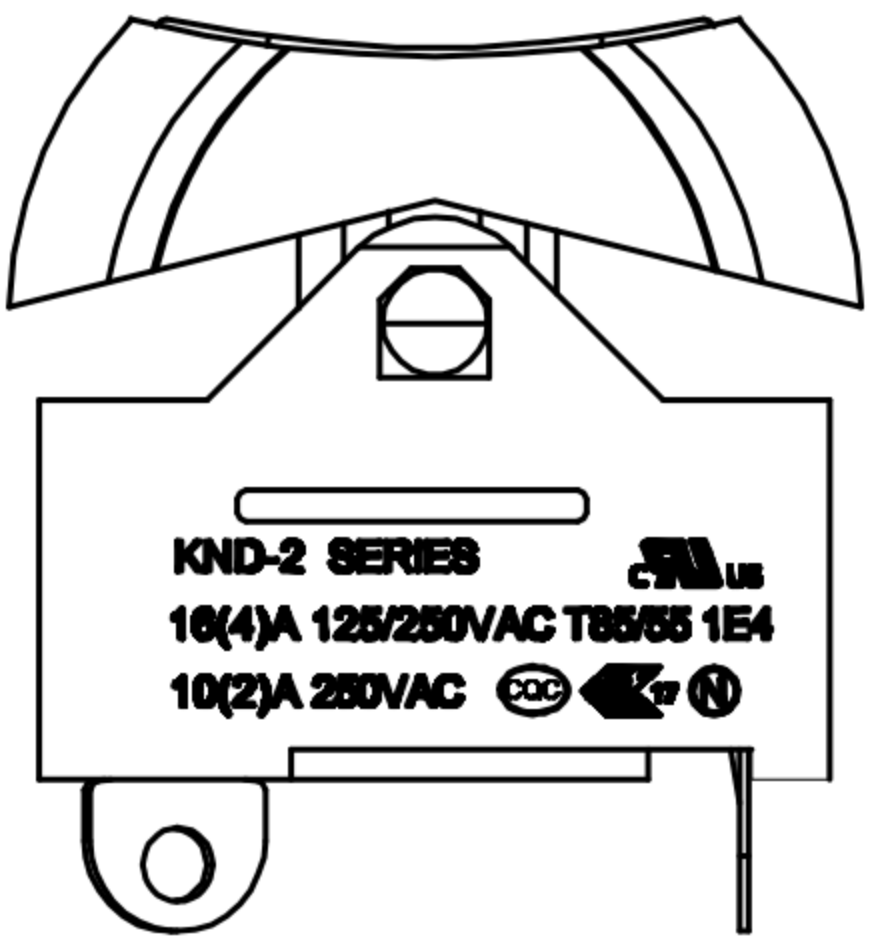
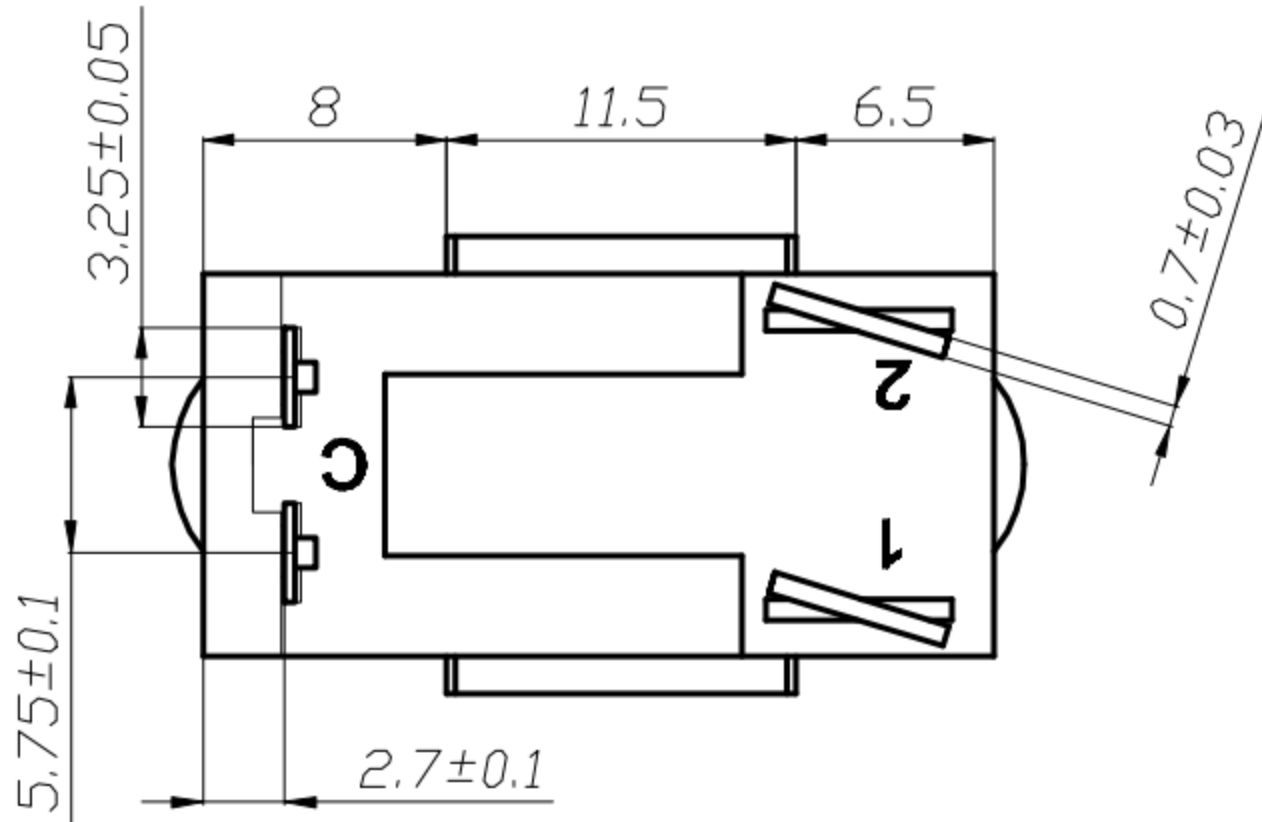
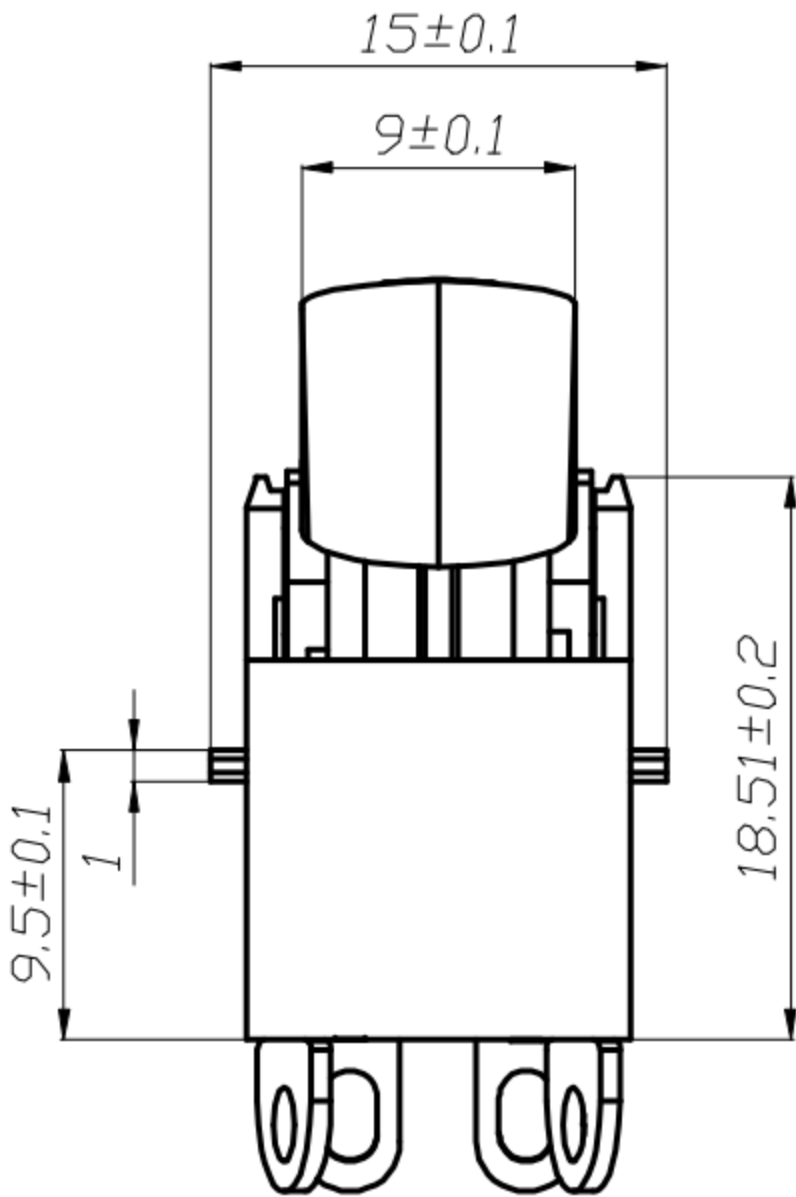
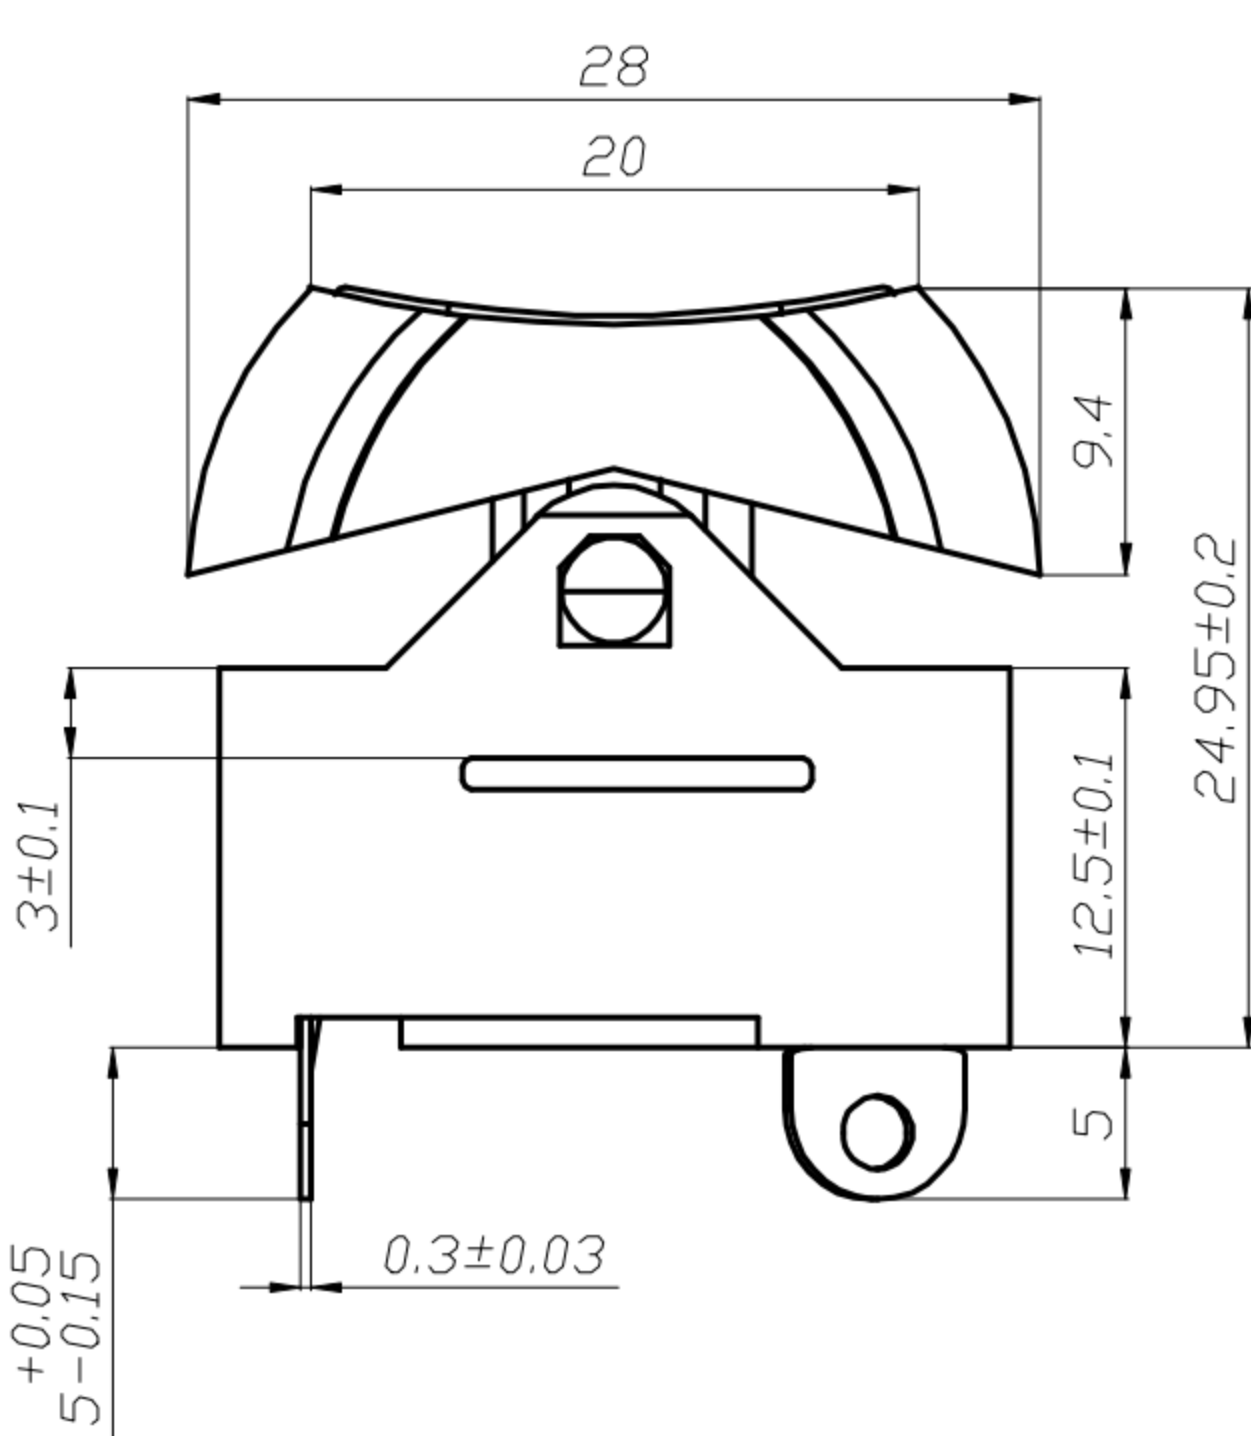


CAD FILE:


ROHS

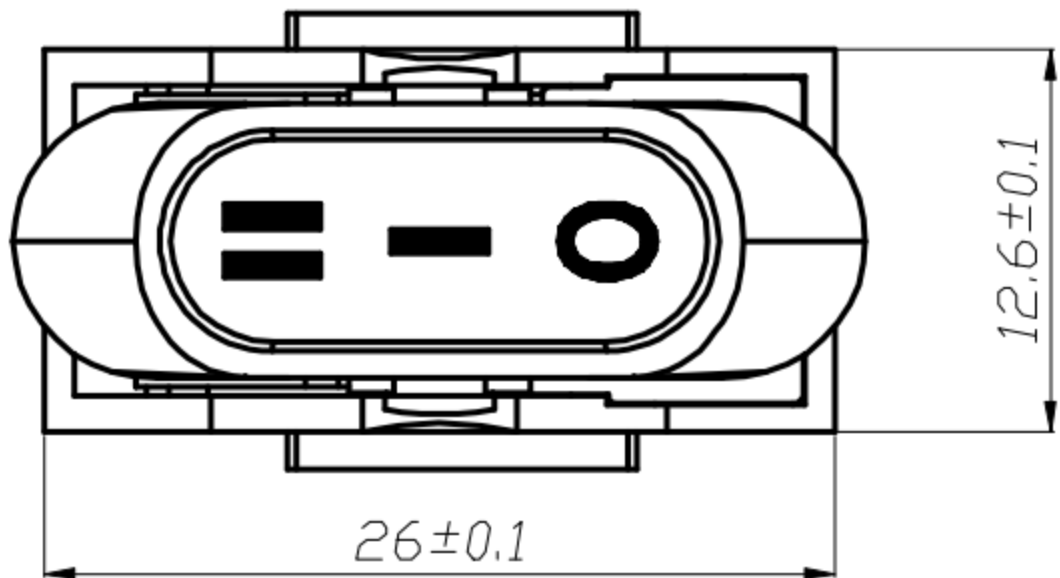

1. 跷板开关型号 ROCKER SWITCH MODEL:
2. 焊线端子 SOLDER CONNECTOR TYPE;
 双刀三掷 SINGLE POLE THREE THROW
3. 额定值 RATING: 16A 125/250VAC T85/55 (ENEC17;NEMKO;CQC)
 10A 125/250VAC T85/55 (CQC)
 10A 250VAC T85/55 (VDE)
 10(2)A 250VAC T85/55 (ENEC17;NEMKO)
 7(2)A 250VAC T85/55 (ENEC17;NEMKO)
 5(1)A 250VAC T85/55 (ENEC17;NEMKO)
 3(1)A 250VAC T85/55 (ENEC17;NEMKO)
4. 接触电阻 CONTACT RESISTANCE: <50mΩ (INITIAL)
5. 绝缘电阻 INSULATION RESISTANCE: ≥100MΩ(DC500V/1MIN)
6. 介电强度 DIELECTRIC STRENGTH: 1500V /0.5mA /1MIN
7. 机械寿命 MECHANICAL LIFE: >50000 CYCLES
8. 电气寿命 ELECTRICAL LIFE: >10000 CYCLES
9. 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX350°C, 3S
10. 操作力 OPERATION FORCE: 850±300gf
11. 所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

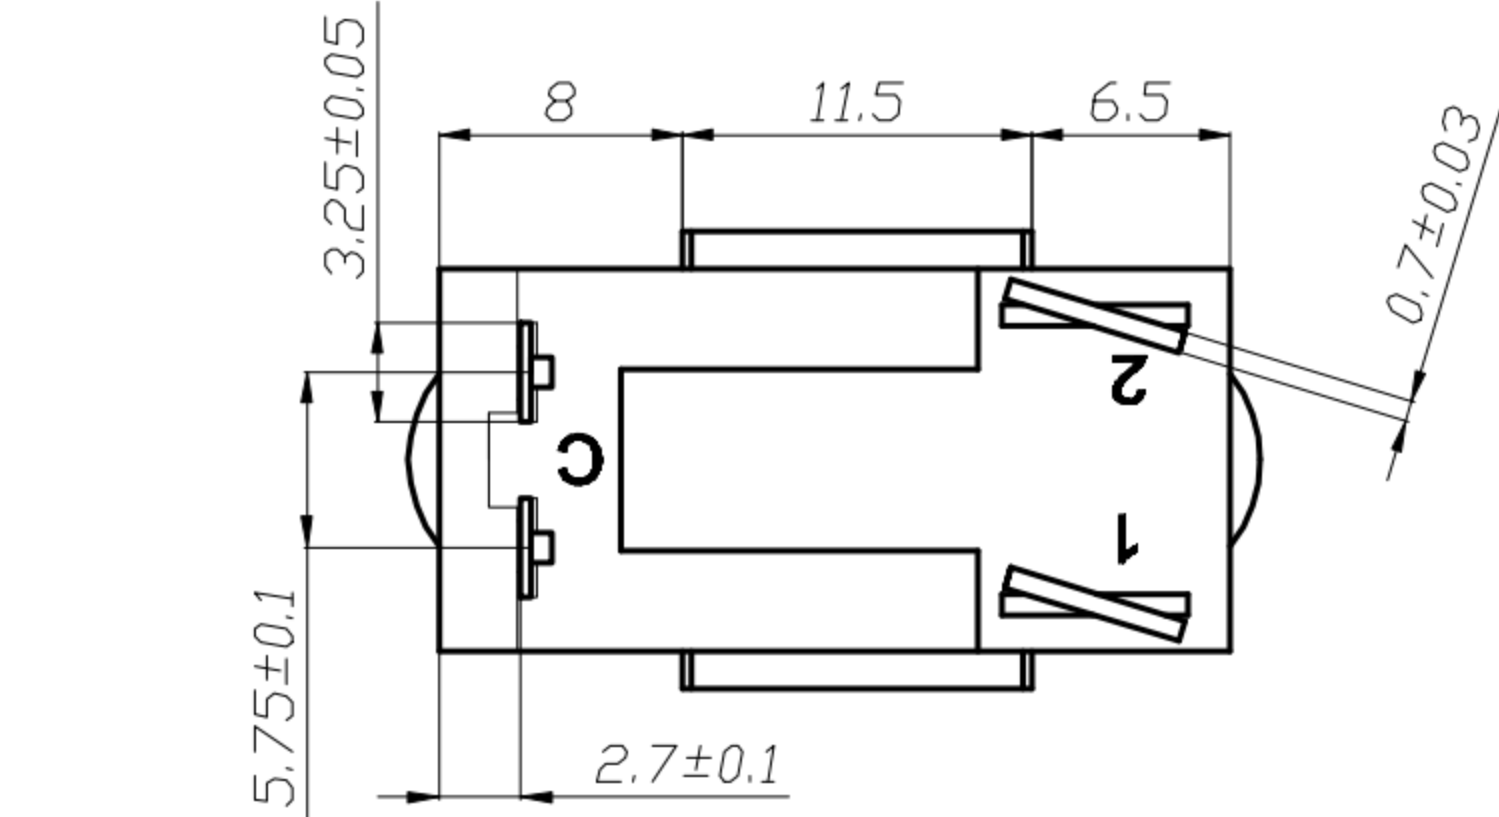

线路/ Circuit

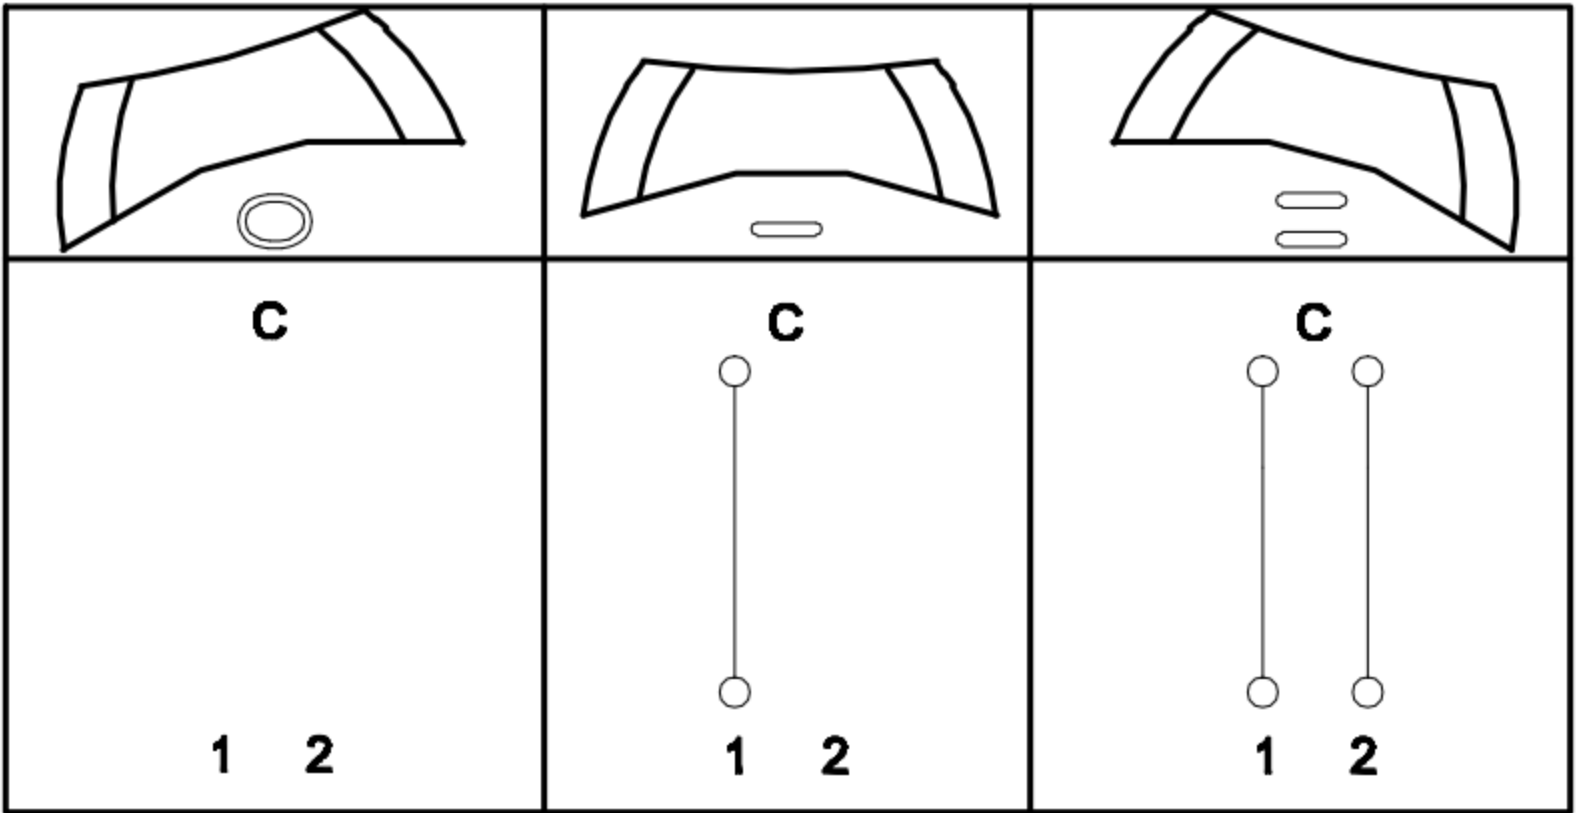

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Rotary Switch			UNIT : mm	DRWG NO.: XB-2-A2B1G2S-
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN R1D
2	COVER	STEEL STRIP	1	Ni PLATED				CHK'D	DONG. PANG
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN
NO.	PARTS	MATERIALS	Q'TY	FINISH					



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

2012-9-25

2012-9-25

2012-9-25

2012-9-25