
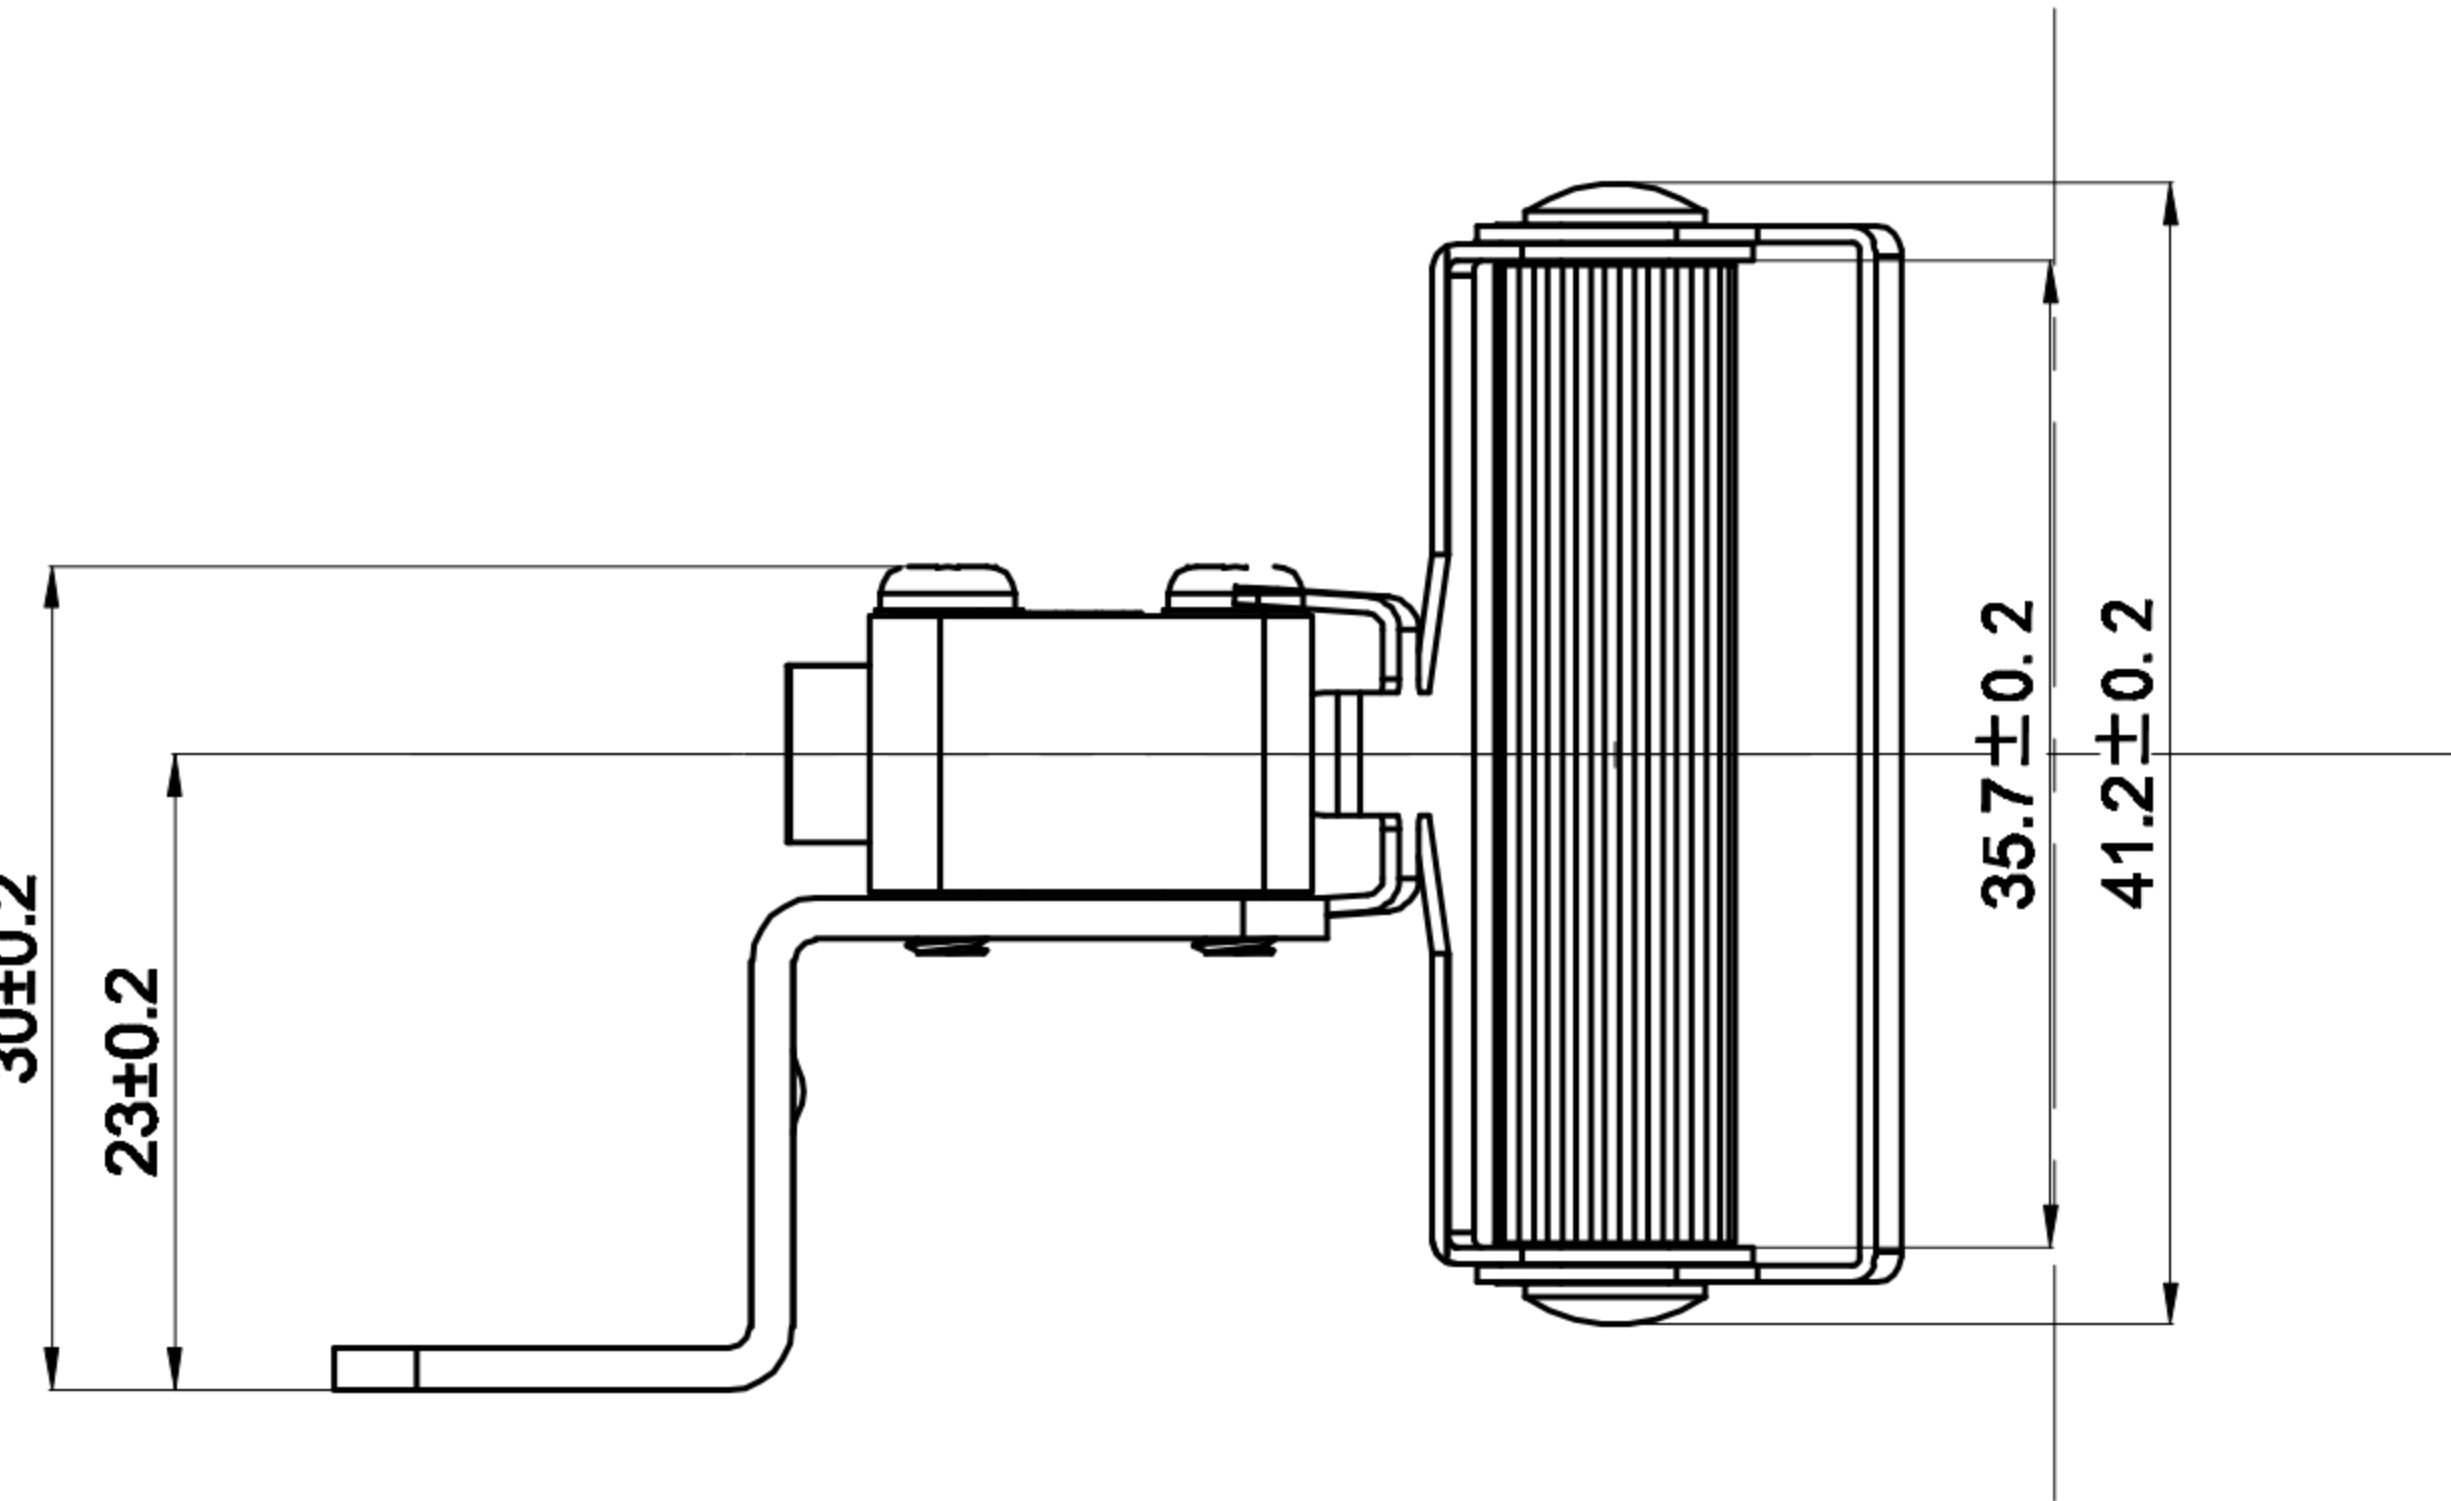


CAD FILE:

ROHS

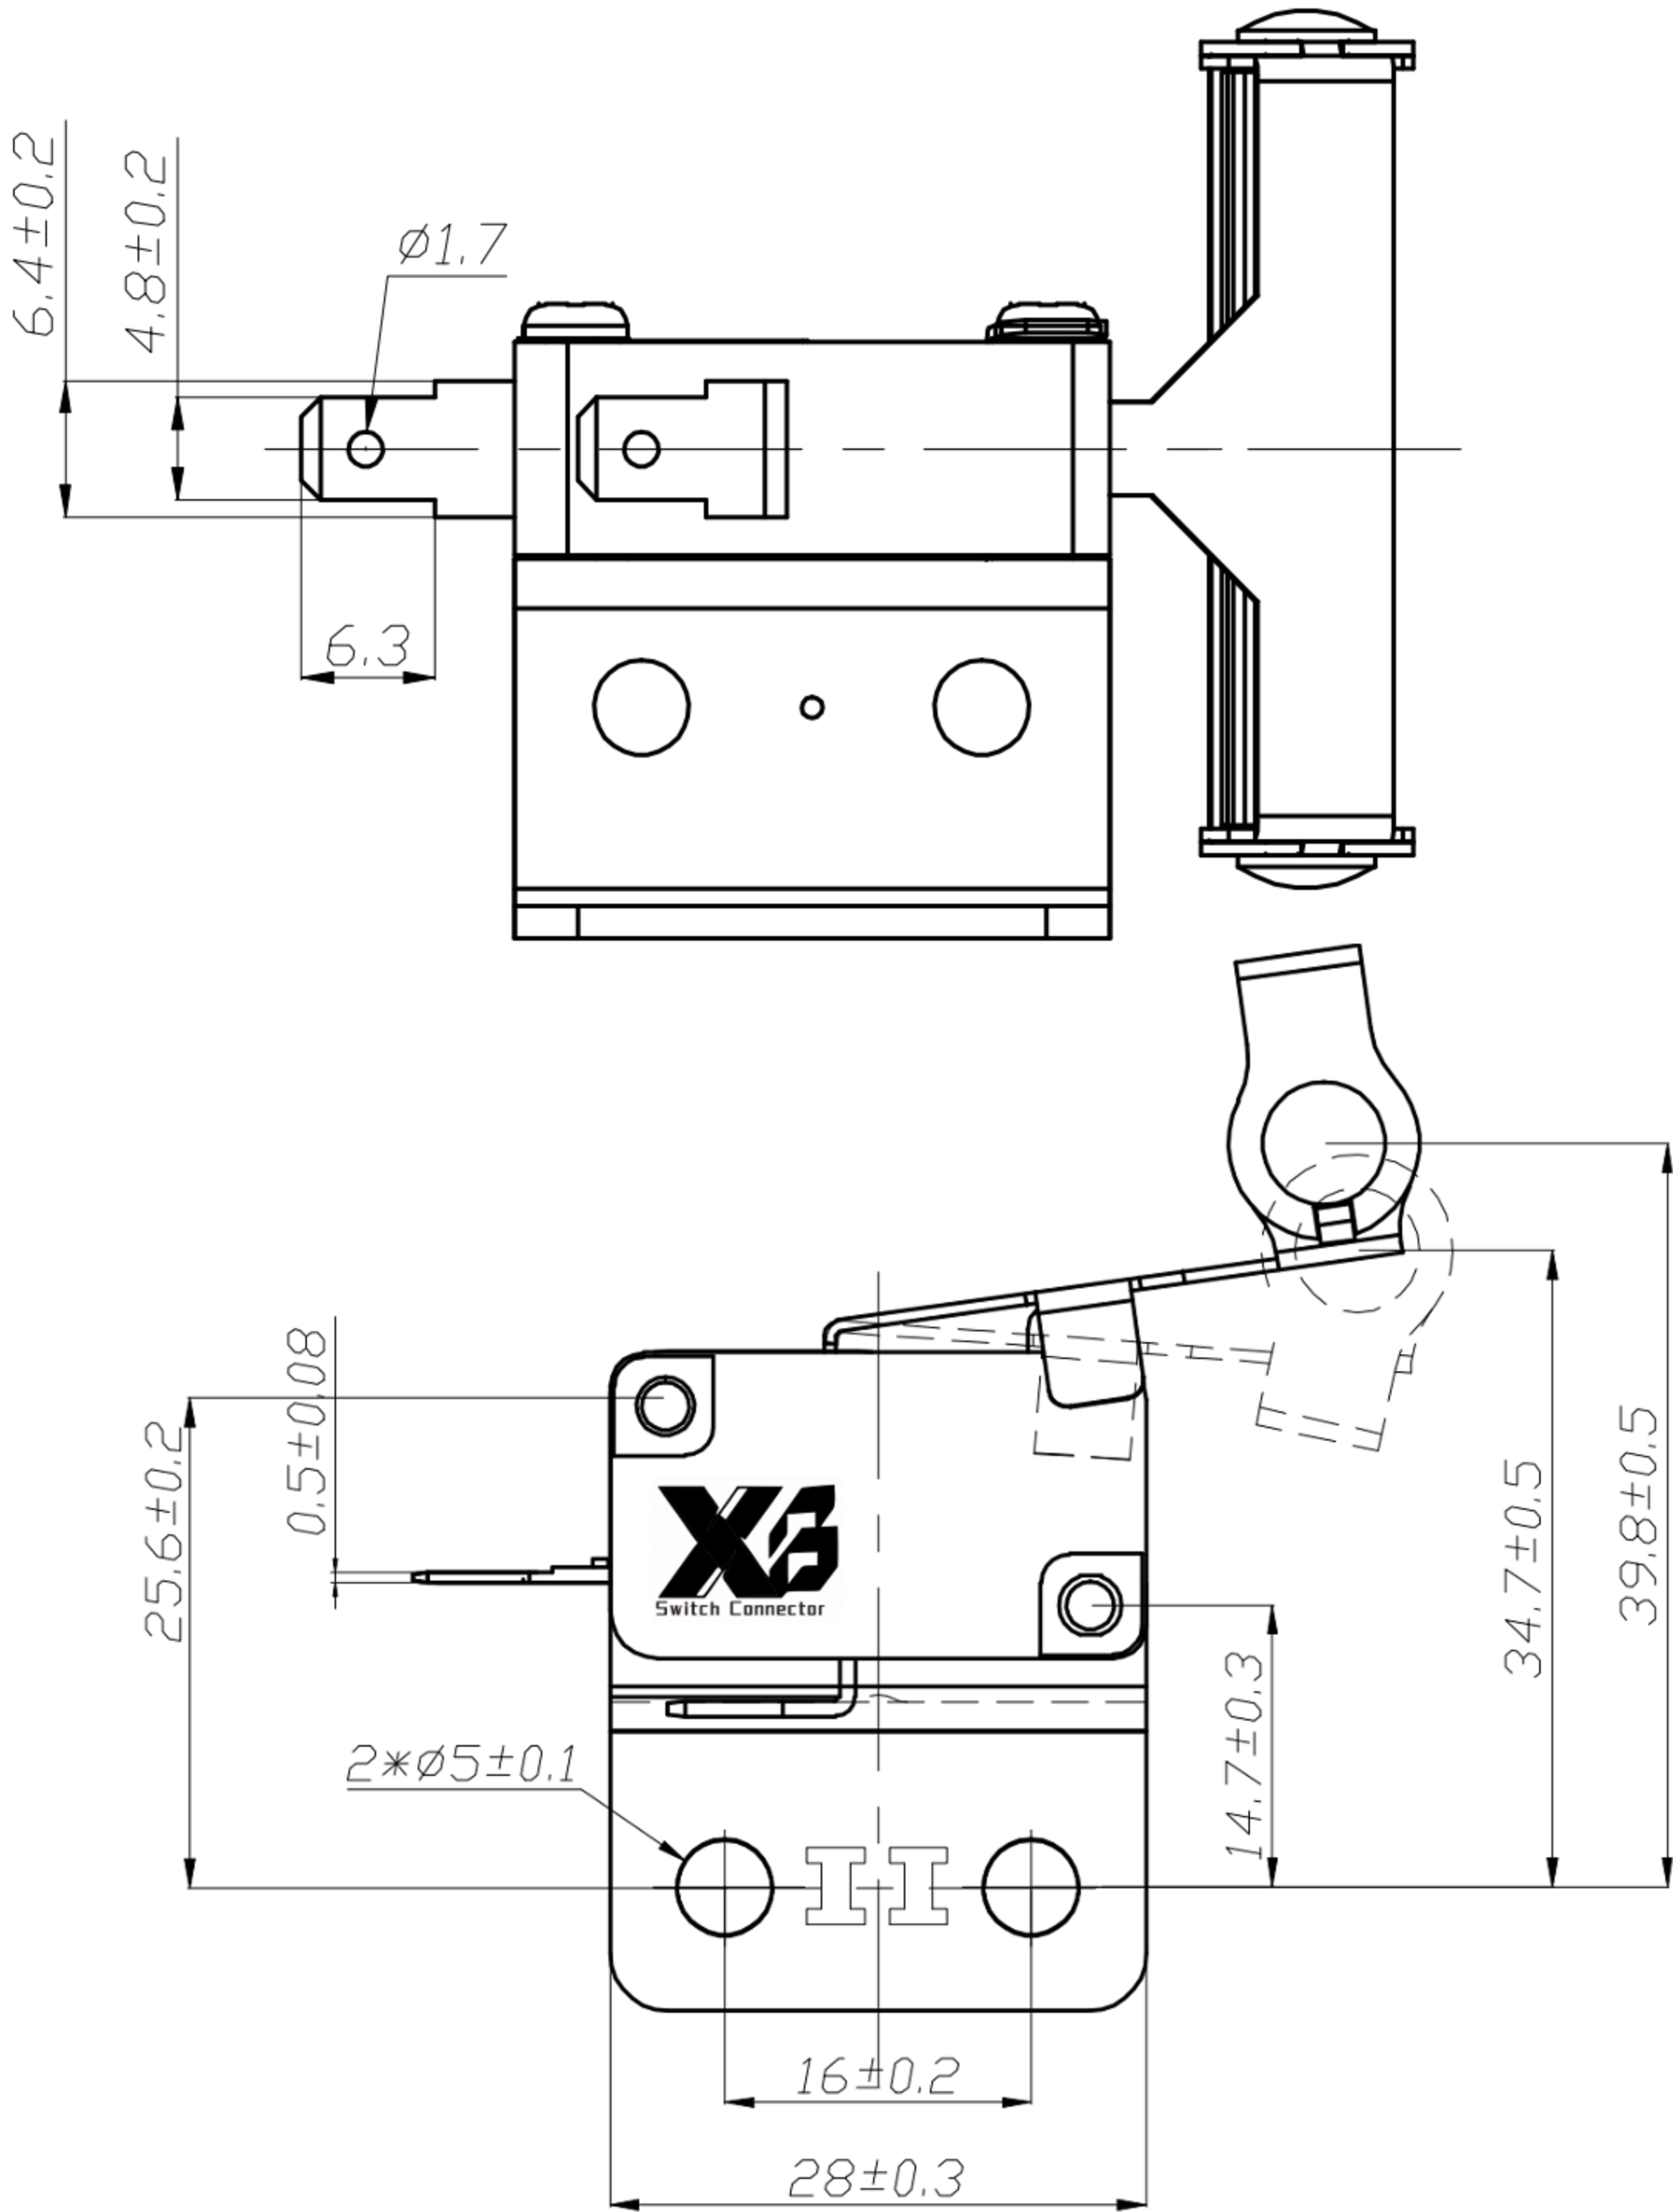

- 1.自动复位开关型号 BIASED SWITCH MODEL NO.:LXW-3-6A
2.快插端子 QUICK CONNECTOR TYPE
单刀双掷 SINGLE POLE DOUBLE THROW
3.额定值 RATING: 16A 250VAC μ T125 (KC)
16A 125/250VAC μ T125 (UL;ENEC17;NEMKO;CQC)
10A 125/250VAC μ T85 (ENEC17;NEMKO;CQC)
4.接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
5.绝缘电阻 INSULATION RESISTANCE: $\geq$ 100M Ω (DC500V/1MIN)
6.介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
7.机械寿命 MECHANICAL LIFE: >50000 CYCLES
8.电气寿命 ELECTRICAL LIFE: >10000 CYCLES
9.操作力 OPERATION FORCE:150~250gf
10.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm$ 0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm$ 0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch			UNIT : mm	DRWG NO.:
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-LXW-3-6A-11			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					