


## 产品规格书 Product Details specification

Product Name	File No.	Version	Date	Page
XB-SW-600-DIP 振动传感元件	XB-3D-060	A4	2023.04.8	3/3

### SIZE尺寸

Unit: mm,  
Tolerance  $\pm 0.15$

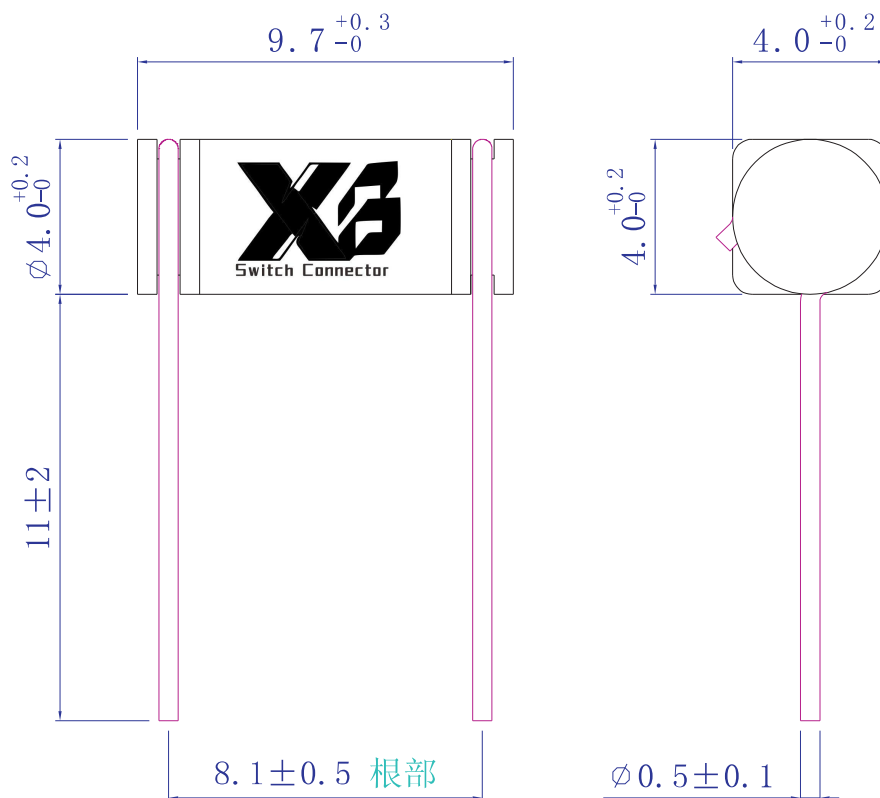

### Note 注意事项

- If the product used for high security products and durability of extremely high equipment (such as life safety equipment, aviation facilities, disaster prevention device), please confirm whether a share, can seek advice our company for details.  
如果该产品要用于高安全性产品及耐久性极高的设备中（如生命安全设备、航空设施、防灾装置），请确认是否合用，或咨询我司了解详情。
- In case of fire, Please do not overload applicable.  
请勿超负荷使用，以防发生火灾。
- The welding temperature or time more than standard, can cause switch collapse.  
焊接温度或时间超过规范时，会造成开关解体。
- Do not use water solubility flux. May cause damage to the switch.  
勿使用水溶性助焊剂、可能会造成开关损坏。
- Do not use solvent wash switch.  
勿使用溶剂清洗开关。
- This switch conduction rate of 98% (conductivity rate per 100 times value switch actions, can good conduction ratio).  
本开关导通率为98%以上（导通率是指开关每100次动作中，可以良好导通的比率）。
- XiBang company is only responsible for the defective problems of the product itself, return and exchange the defective products, and does not bear other joint and several expenses.  
溪榜公司只承担本产品本身不良问题,对不良品进行退换货,不承担其它连带费用责任。