





CAD FILE:

ROHS

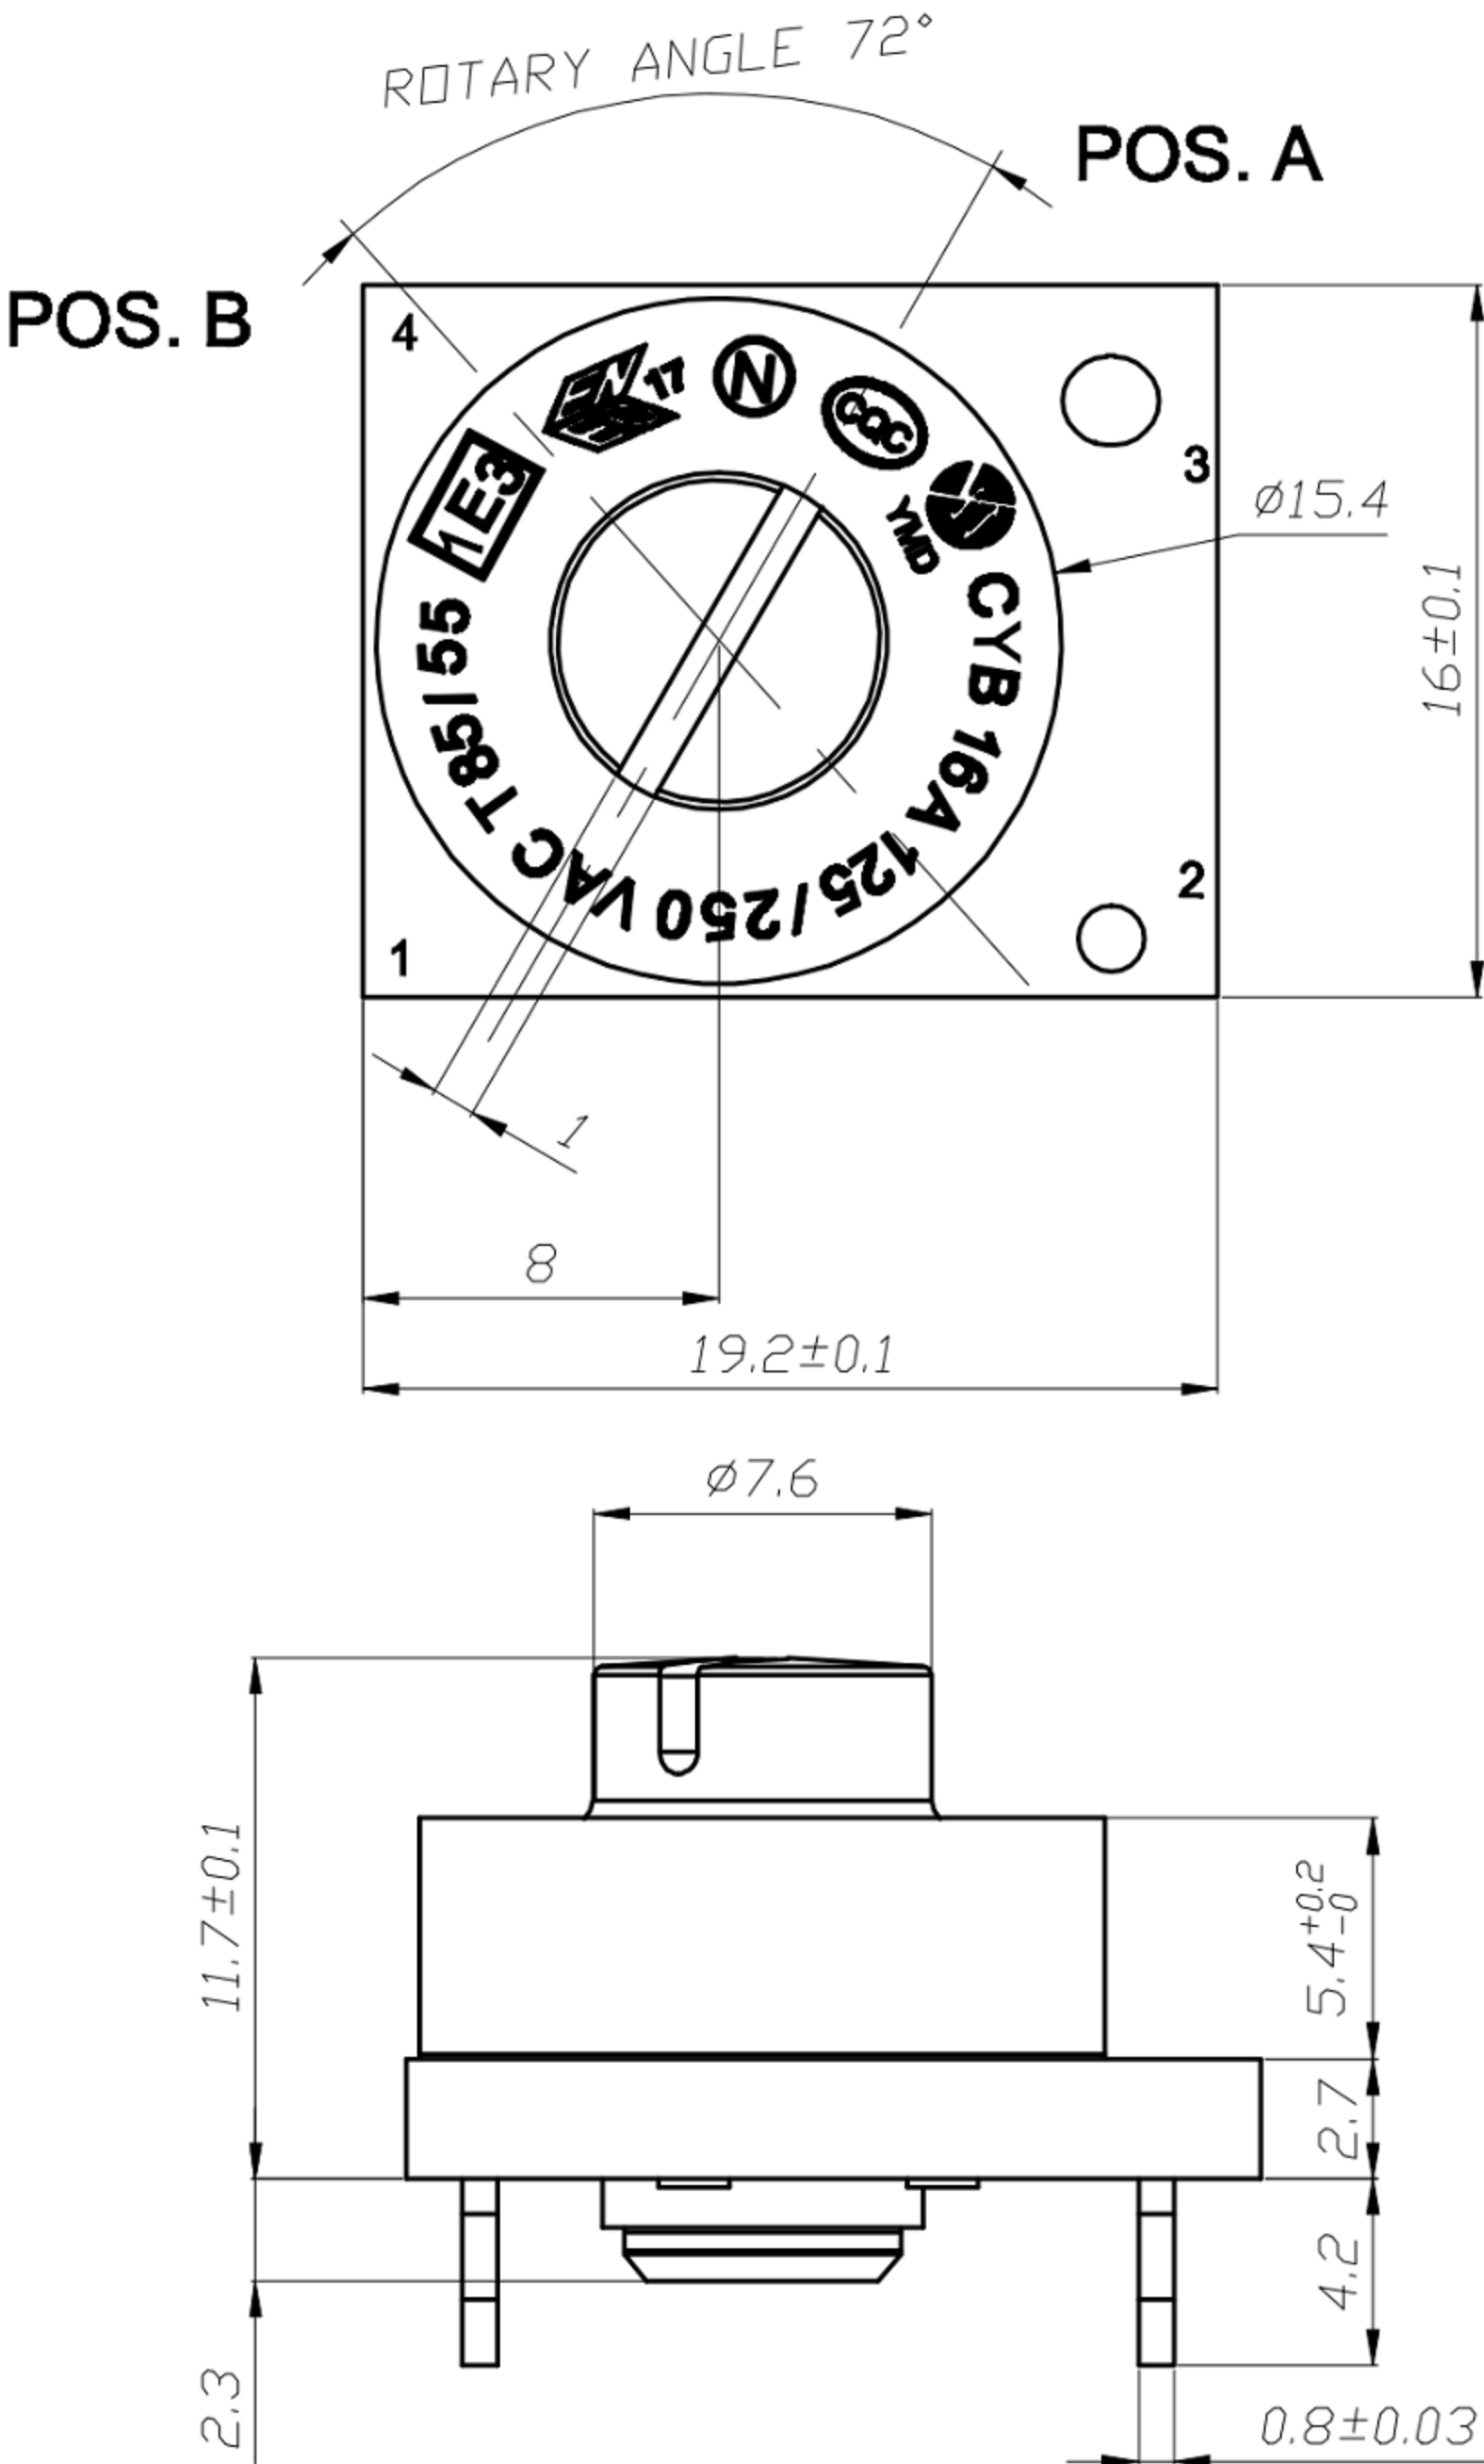

- 1.电压转换开关型号 CHANGE-OVER SELECTOR MODEL:
- 2.焊线端子 SOLDER CONNECTOR TYPE;
双刀双掷 DOUBLE POLE DOUBLE THROW)
- 3.额定值 RATING: 16A 125/250VAC T85/55 1E3 (ENEC17;NEMKO;CQC)
16 (3) A 125/250VAC 50/60Hz T105/55 3E3 (UL)
10 (2) A 125/250VAC 50/60Hz T105/55 3E3 (UL)
5 (1) A 125/250VAC 50/60Hz T105/55 3E3 (UL)
- 4.接触电阻 CONTACT RESISTANCE: <50mΩ (INITIAL)
- 5.绝缘电阻 INSULATION RESISTANCE: ≥100MΩ(DC500V/1MIN)
- 6.介电强度 DIELECTRIC STRENGTH: 1500V /0.5mA /1MIN
- 7.机械寿命 MECHANICAL LIFE: >50000 CYCLES
- 8.电气寿命 ELECTRICAL LIFE: >1000 CYCLES
- 9.端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX350°C, 3S
- 10.操作力 OPERATION FORCE:700±200gf
- 11.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

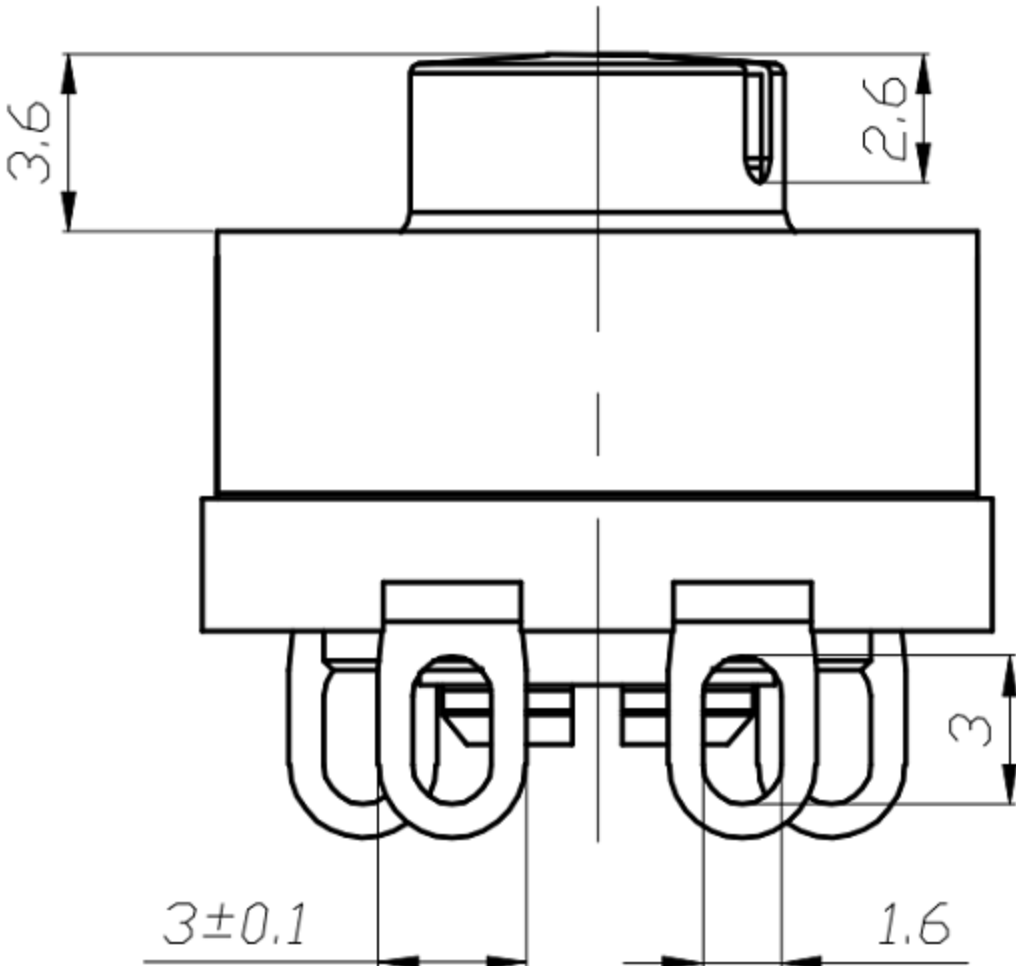

电流电路
CURRENT CIRCUIT

POSITION	CIRCUIT
A	
B	

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Encoder Swith			UNIT : mm	DRWG NO.:XB-XZ-SJ24B
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					