
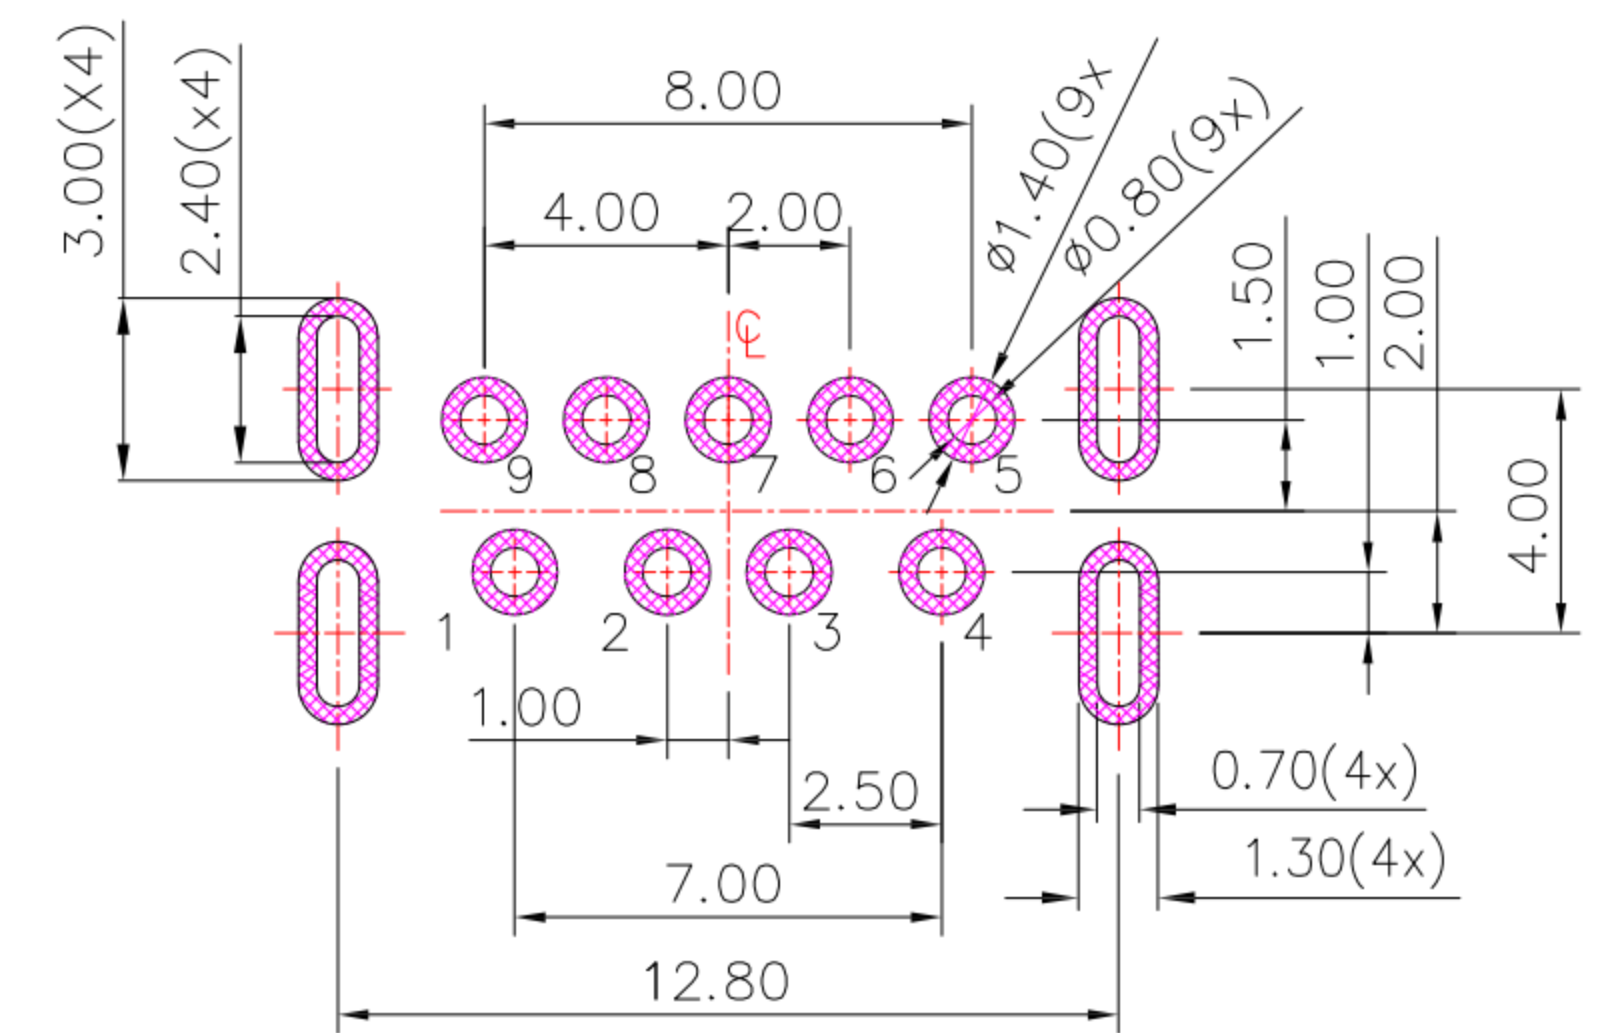
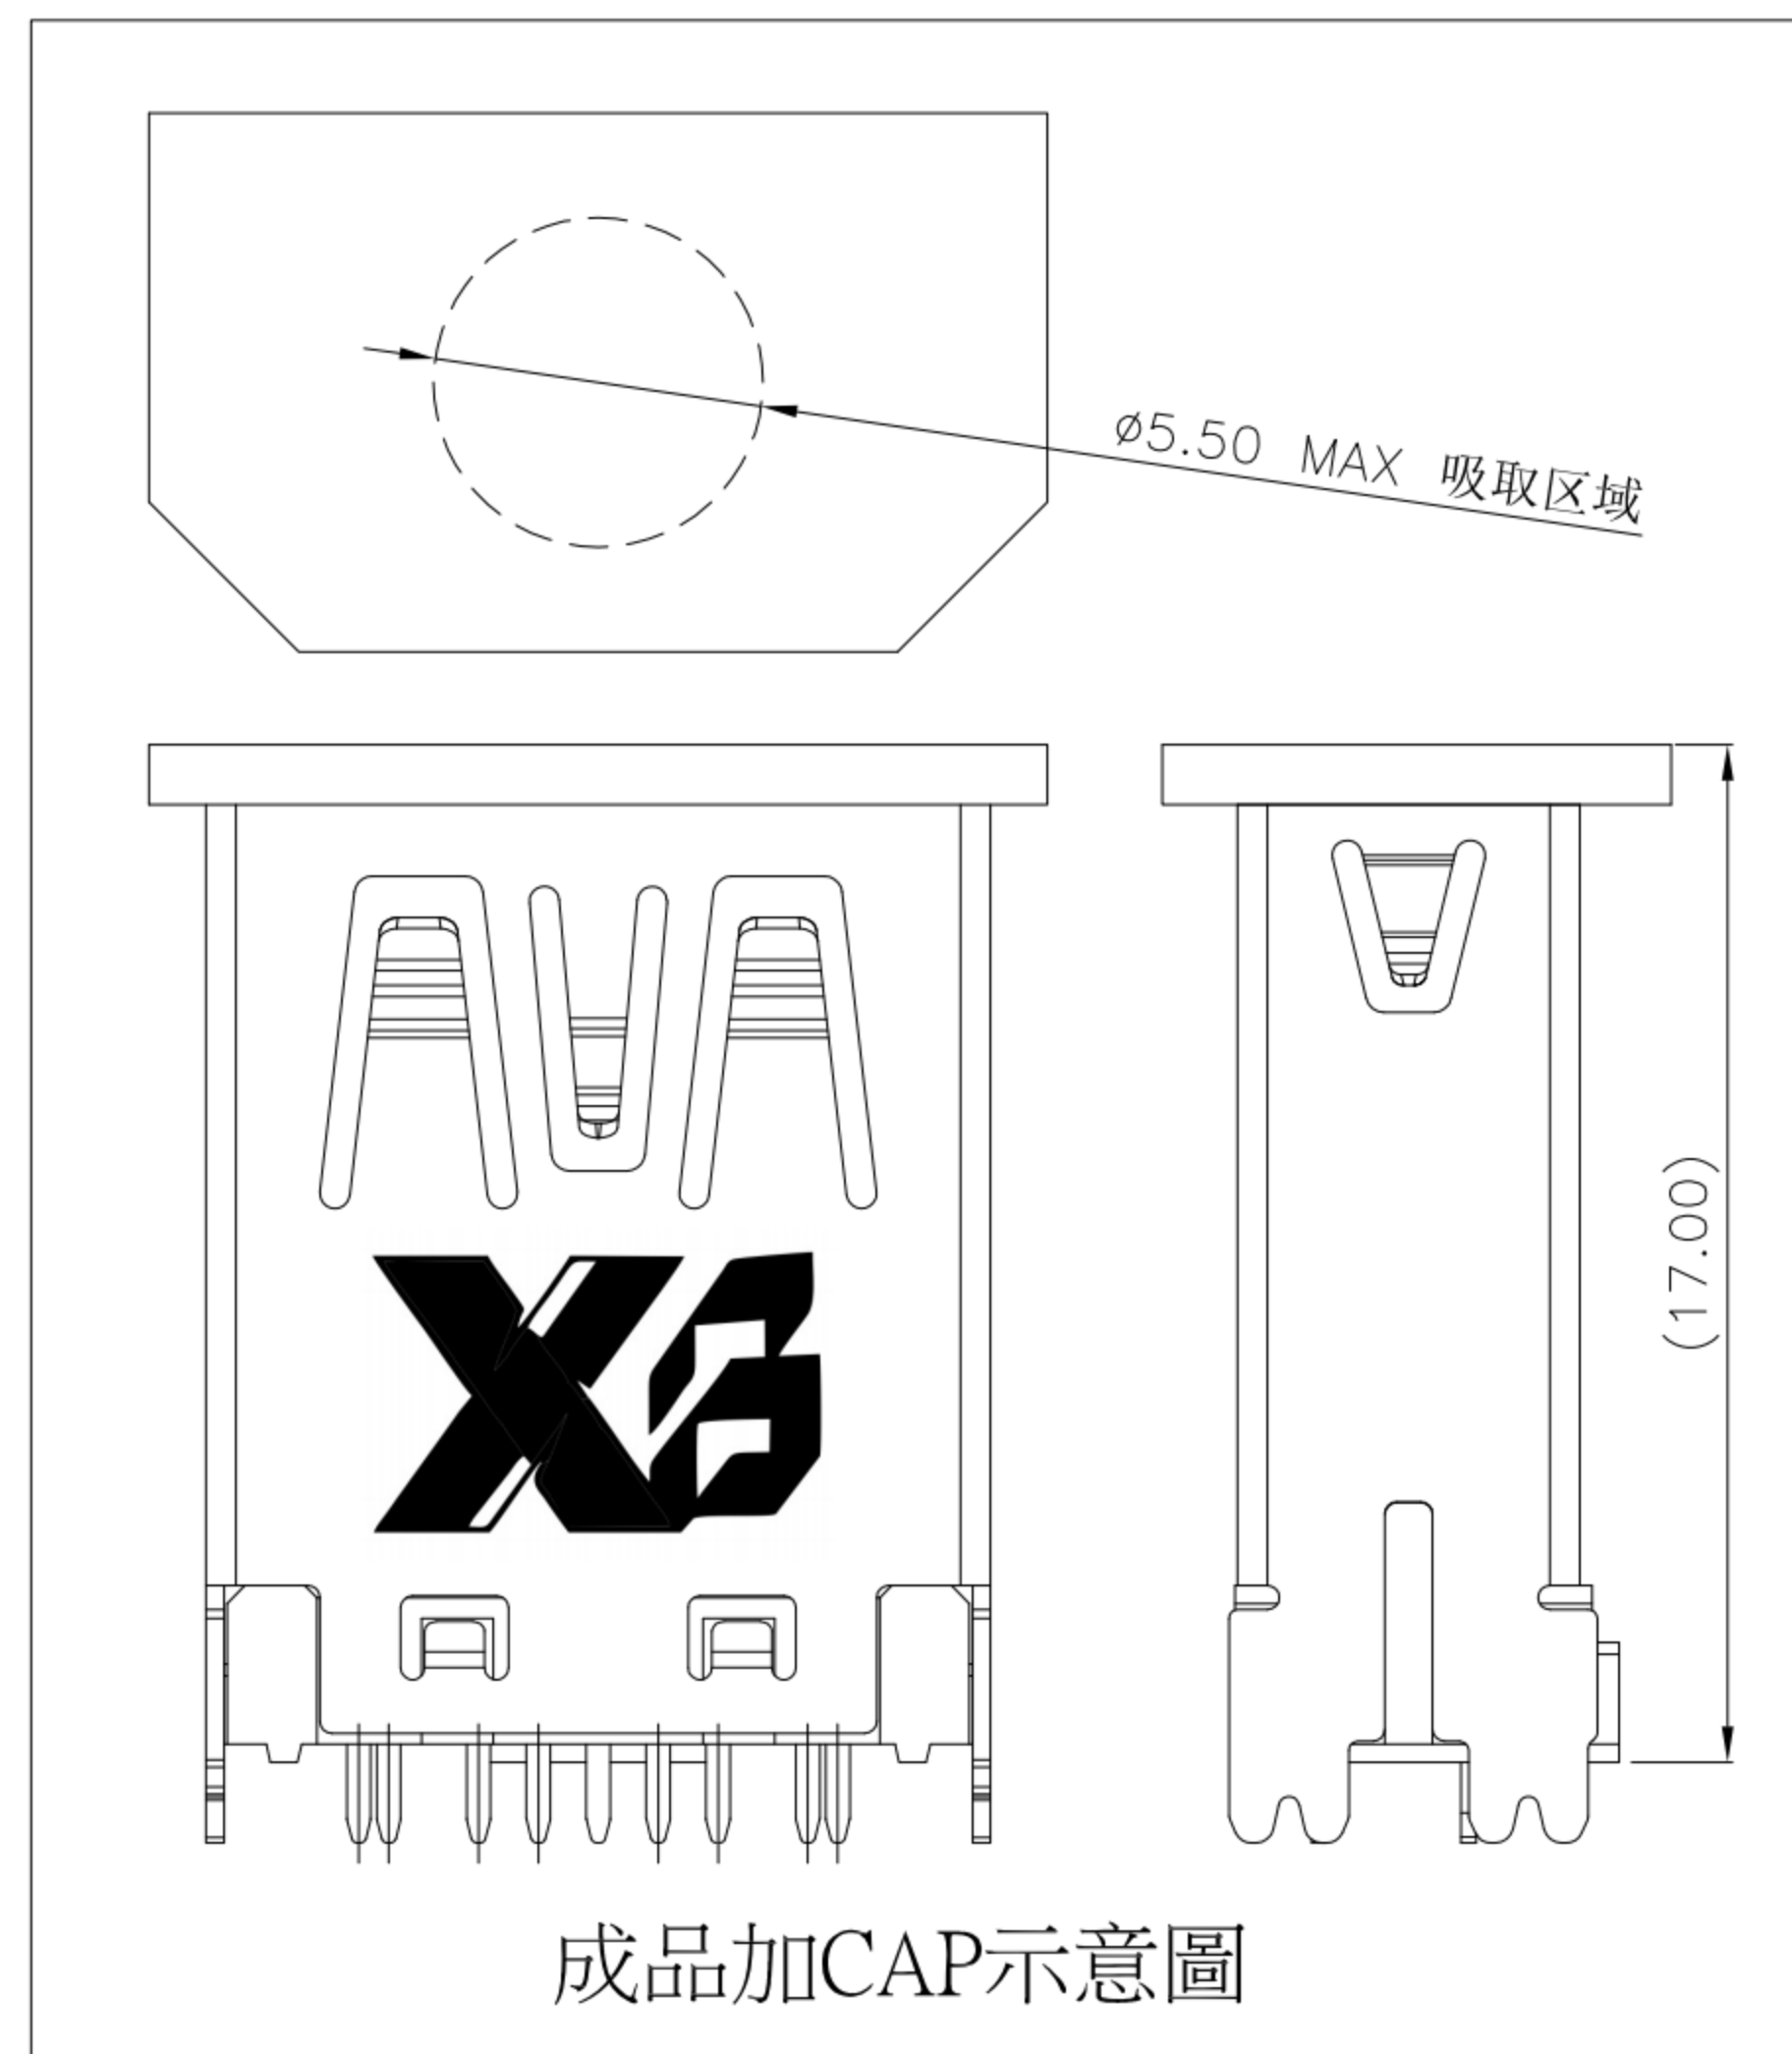






SUA-110V9-30x-S410

鍍層厚度:


Blank : 1u"
2 : 15u"
3 : 30u"

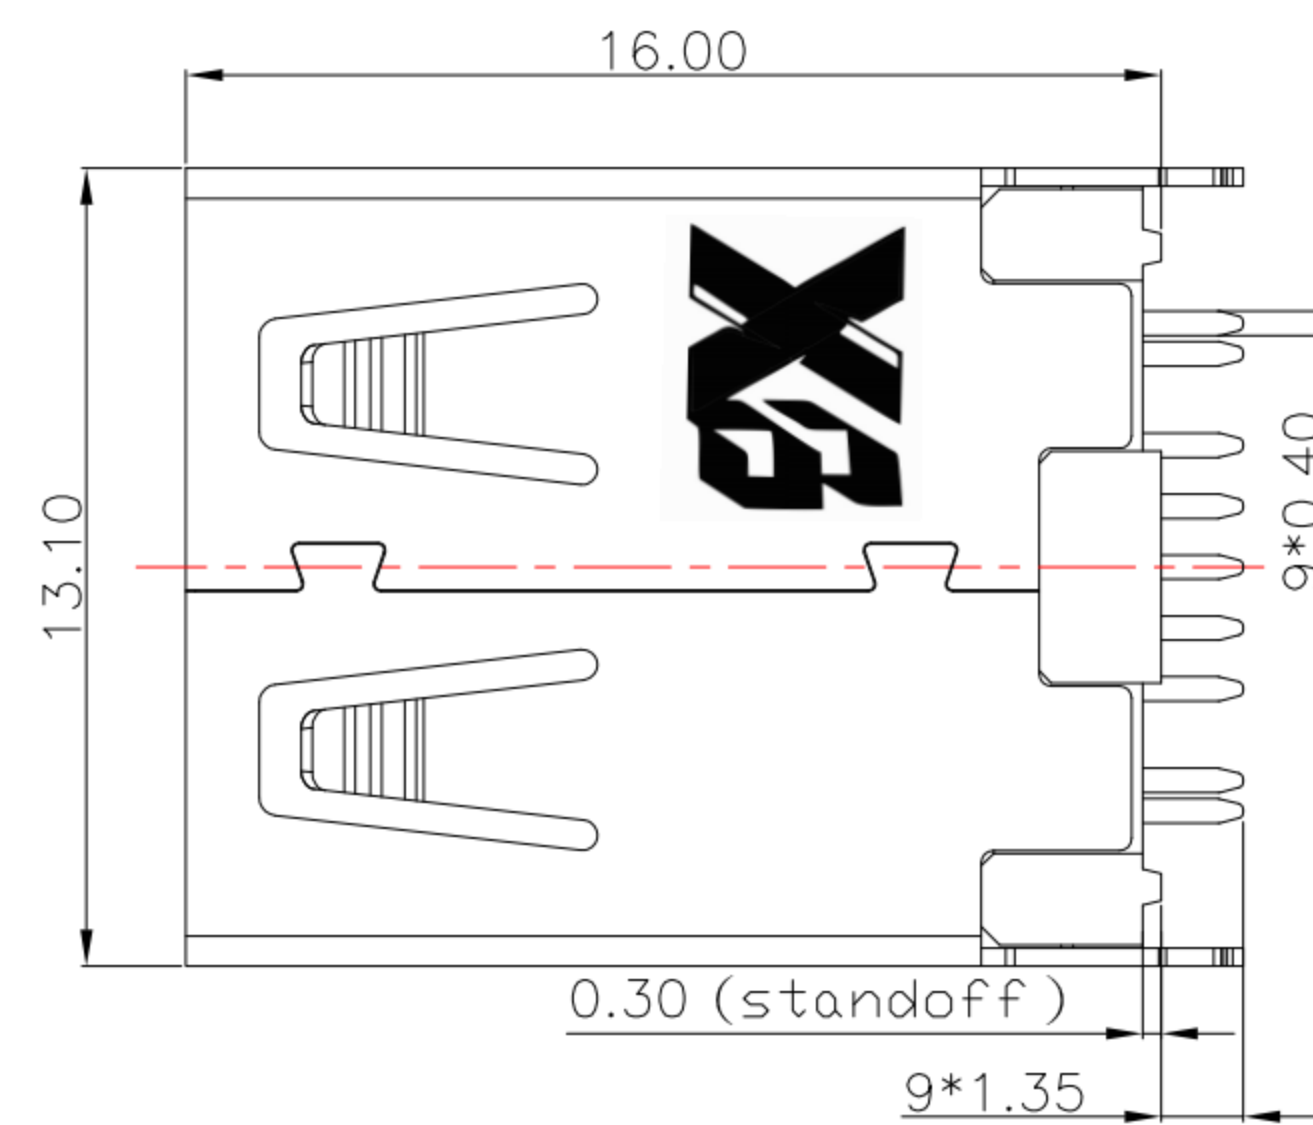

RECOMMENDED PCB LAYOUT

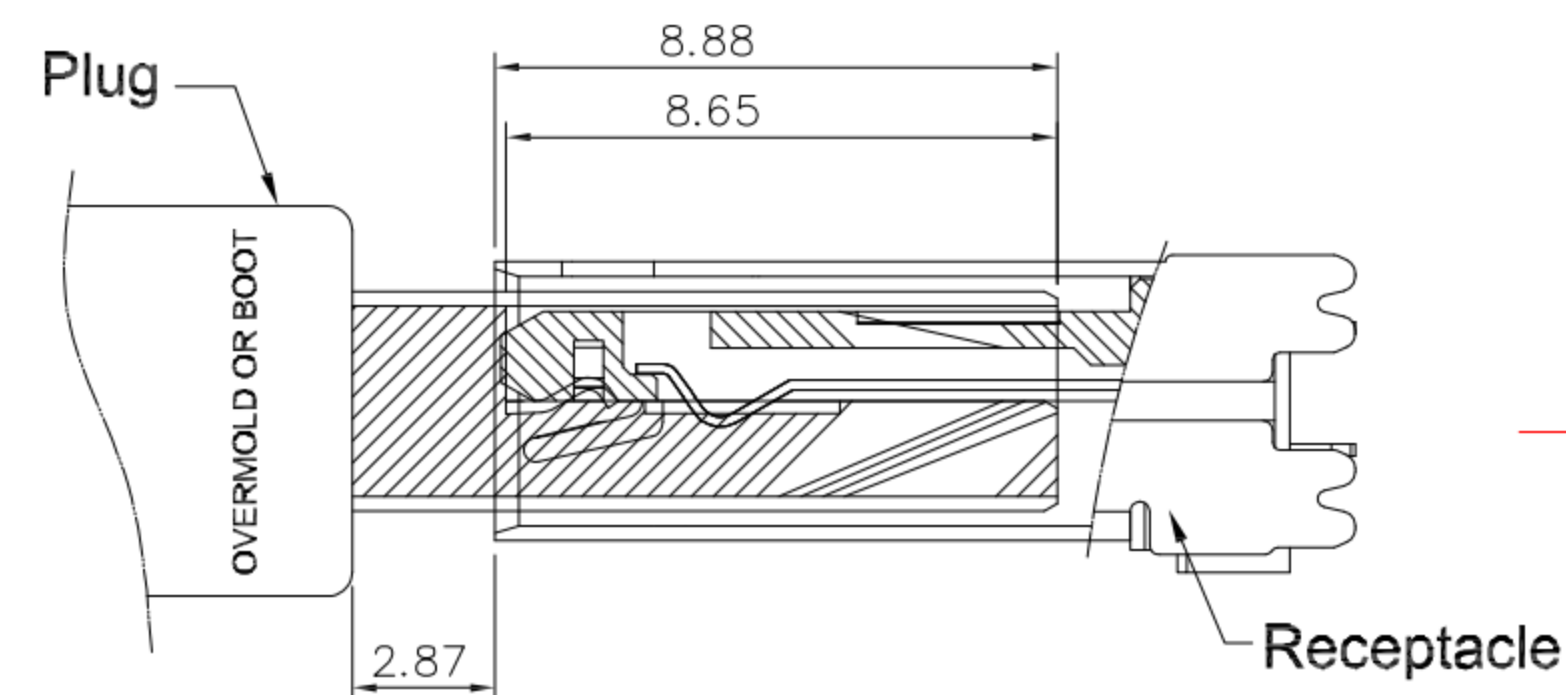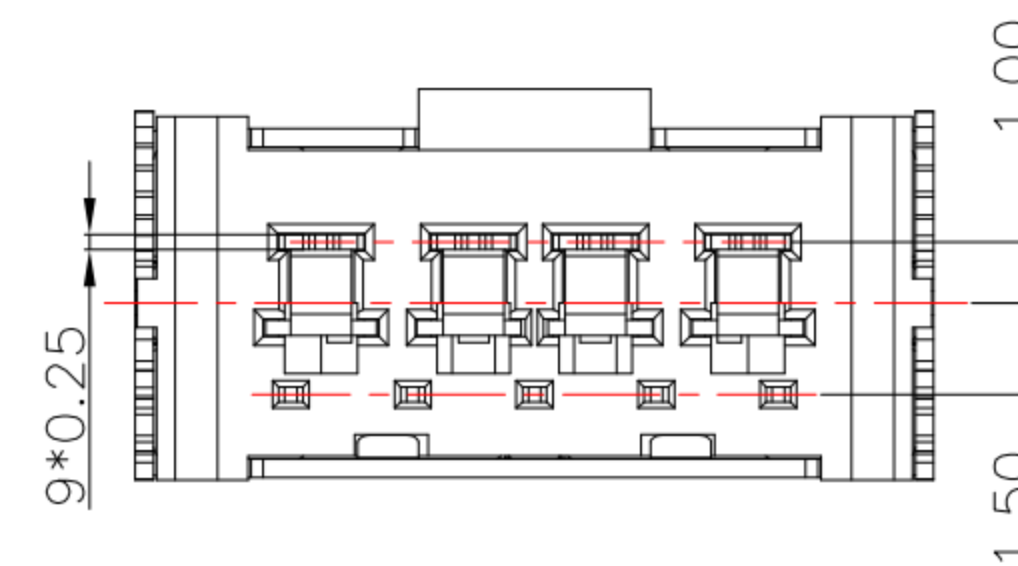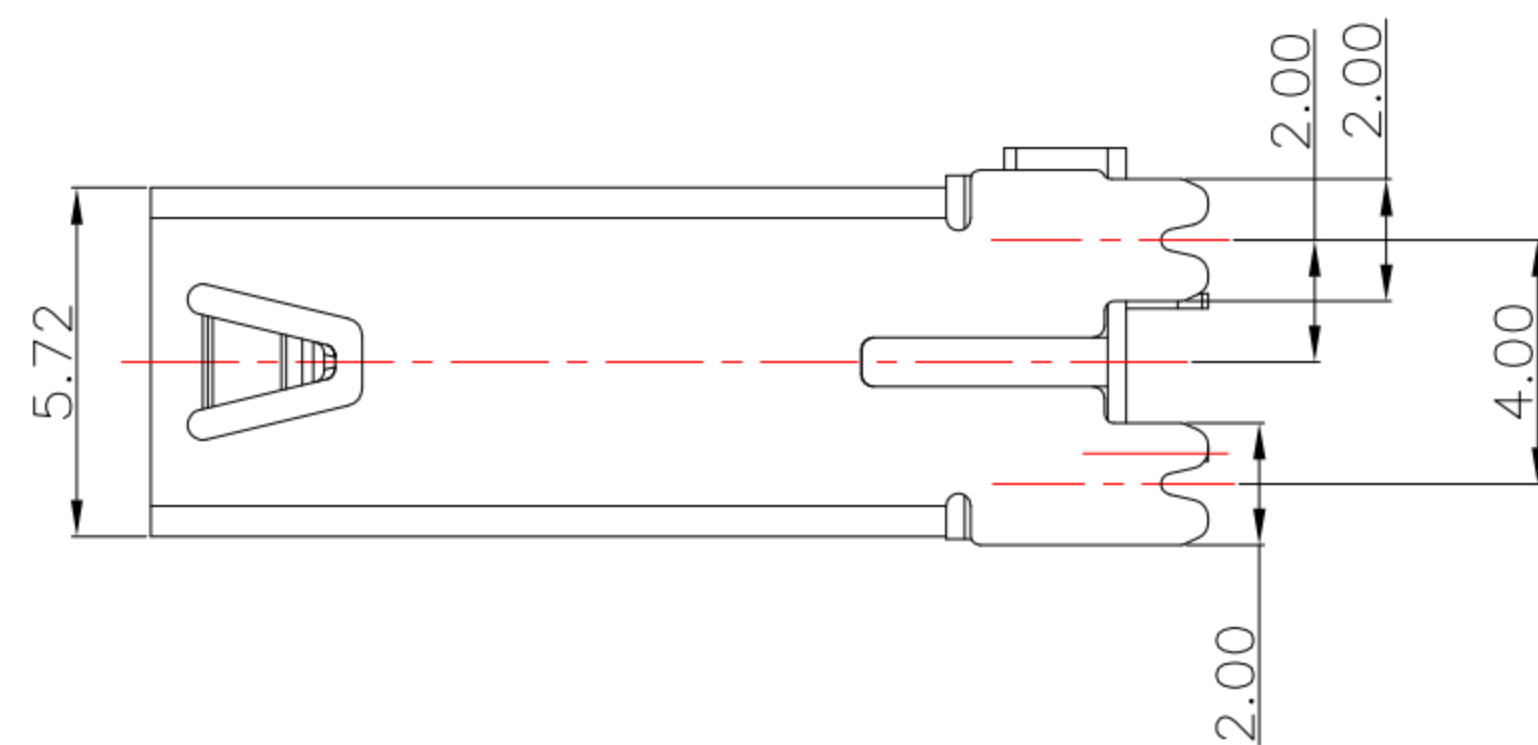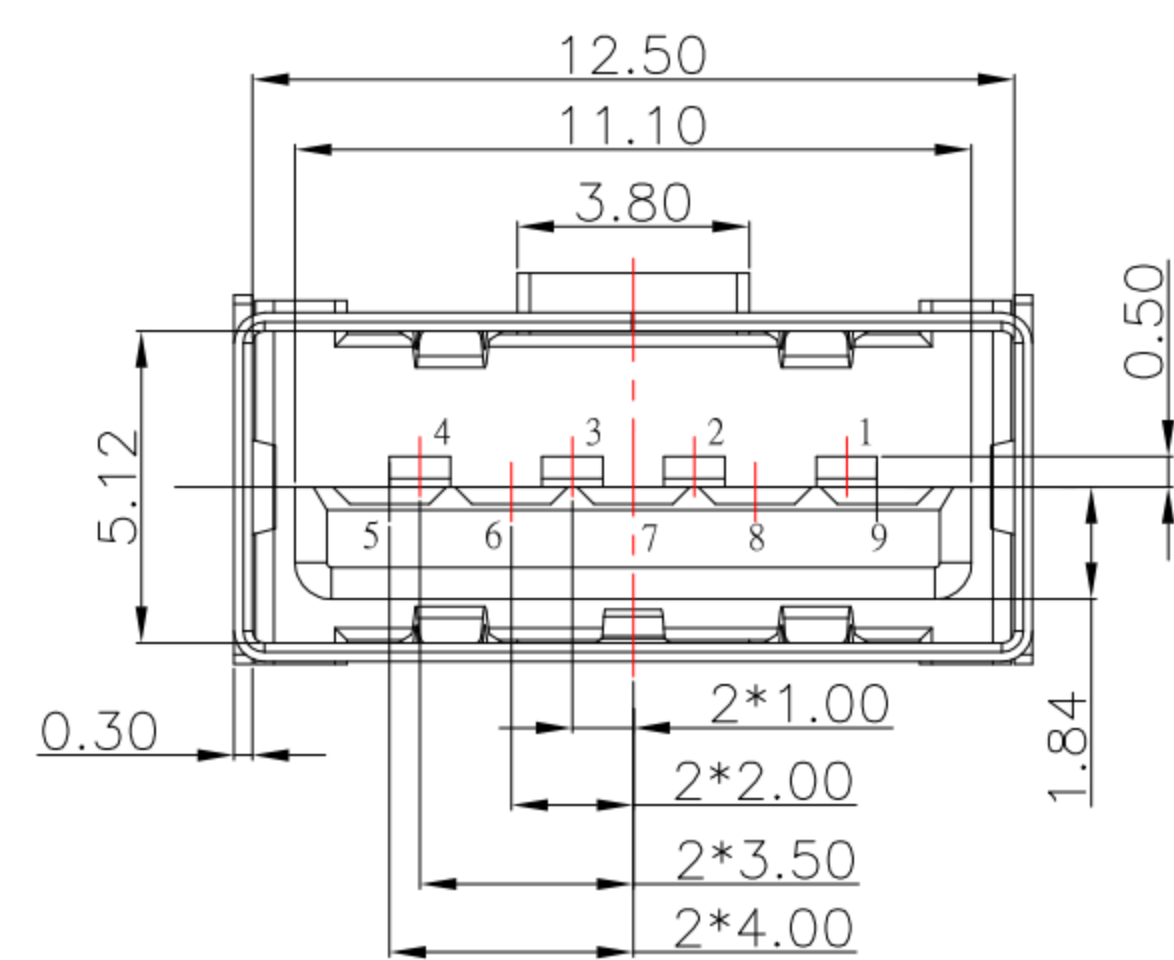

Mated Condition

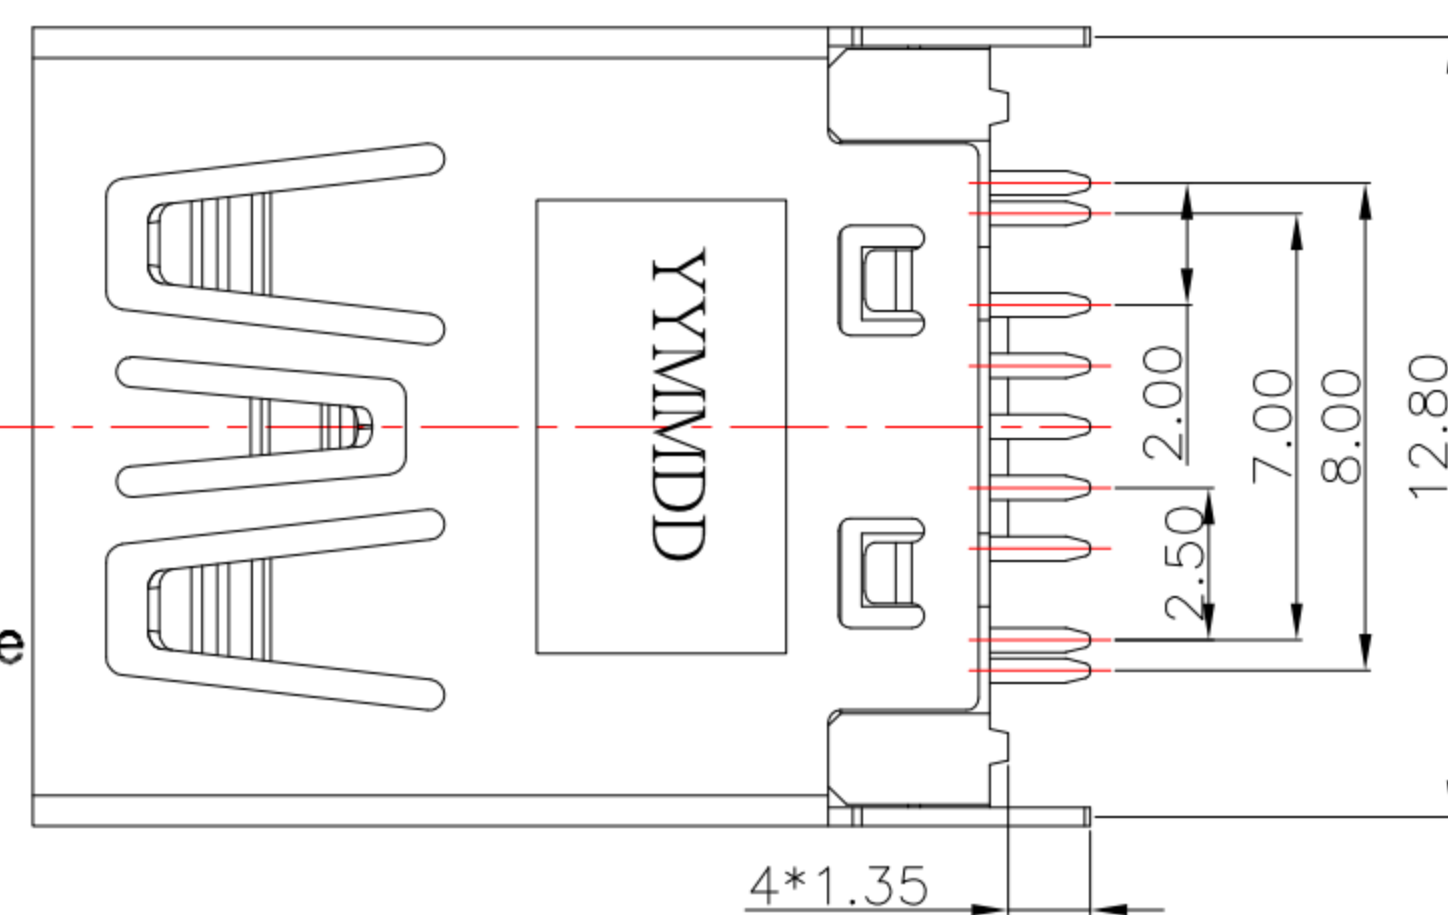

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

NOTE:

1.MATERIAL:

- 1.1 Housing: LCP
- 1.2 Contact: Phosphor Bronze
- 1.3 Shell: SUS


2.Finish:

- 2.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.2 Shell: Nickel under Plated surface layer

XGB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 09/14/22

CHECKED BY: Jacky Chen
DATE: 09/14/22

APPROVED BY: Tony Kao
DATE: 09/14/22

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB 3.0 AF 180度 H16.00 DIP 端子腳長1.35
SCALE	1 : 1	DWG NO.	SUA-110V9-30x-S410
SHEET NO.	1 of 1	PART NO.	SUA-110V9-30x-S410

SIZE
A4
VER
R