



MRUSB-5B-D6xx-S347


Shell Material : SHELL鍍層:

Blank : BRASS







B : SUS

TN

NI

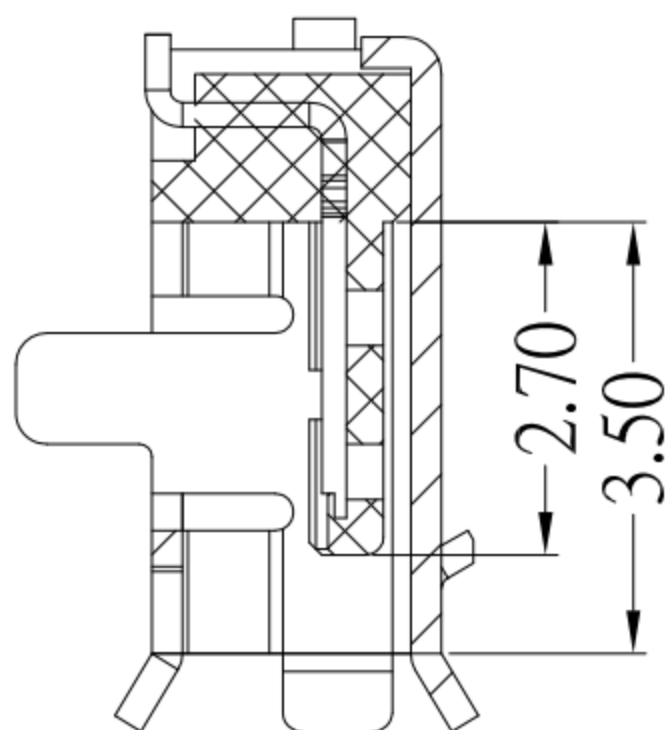

SECTION A-A'

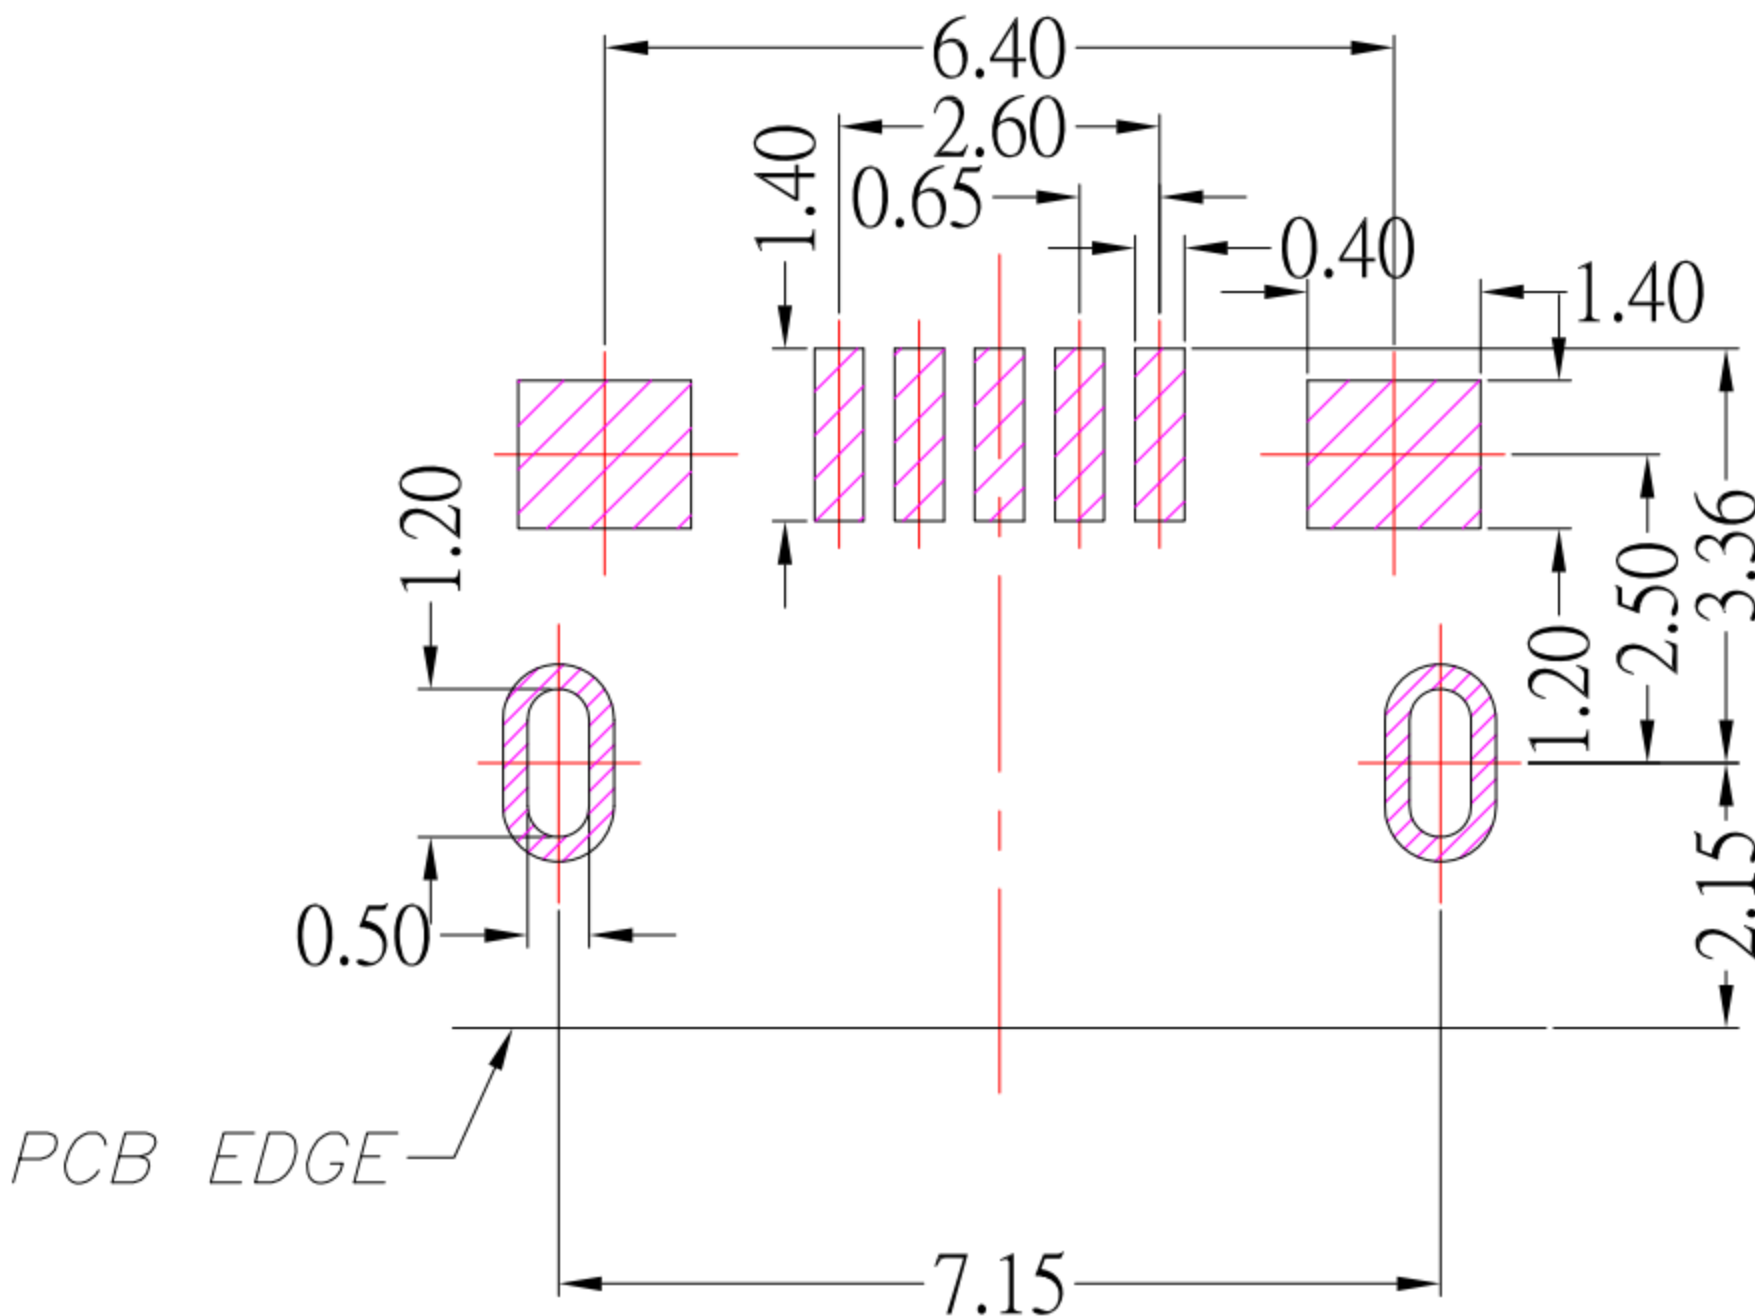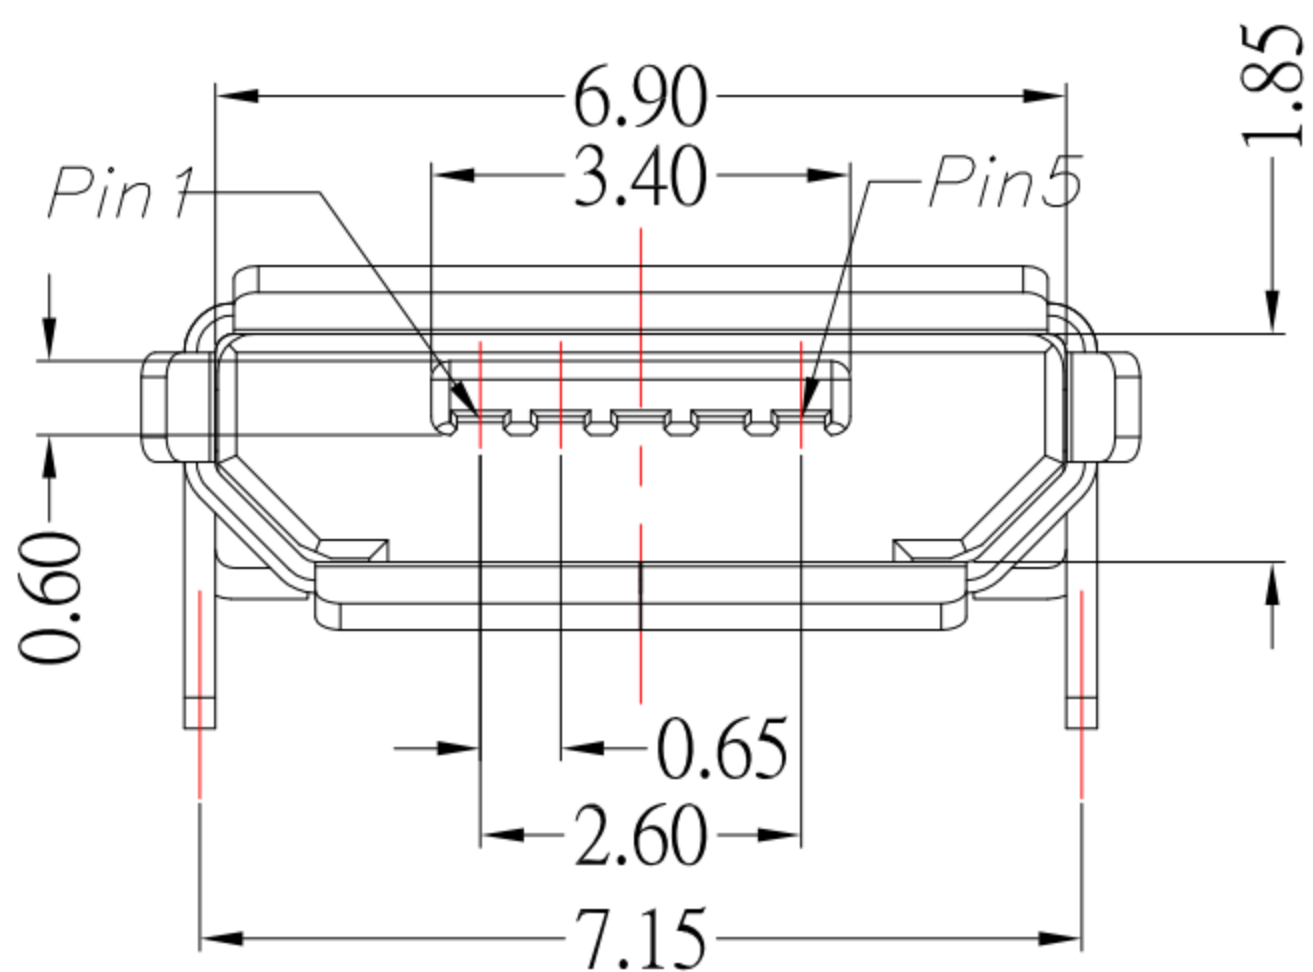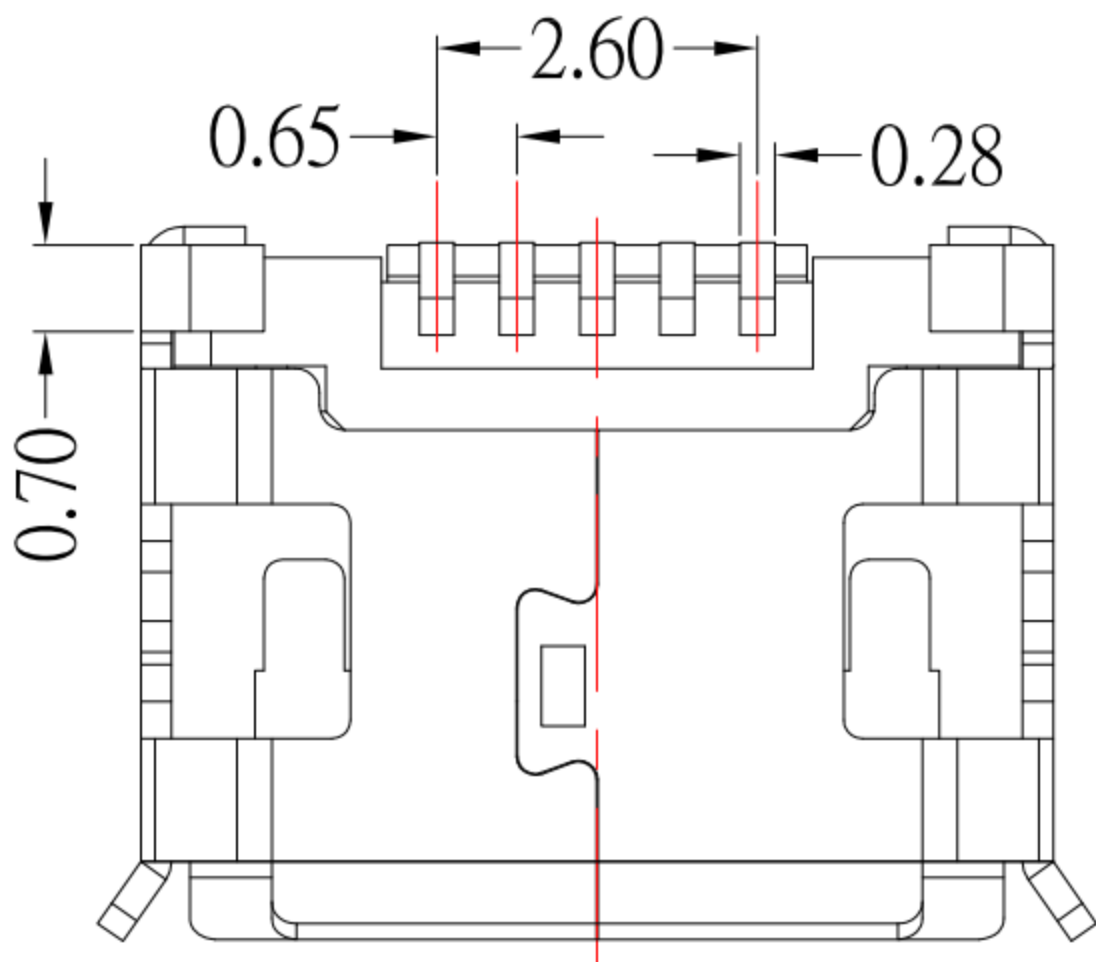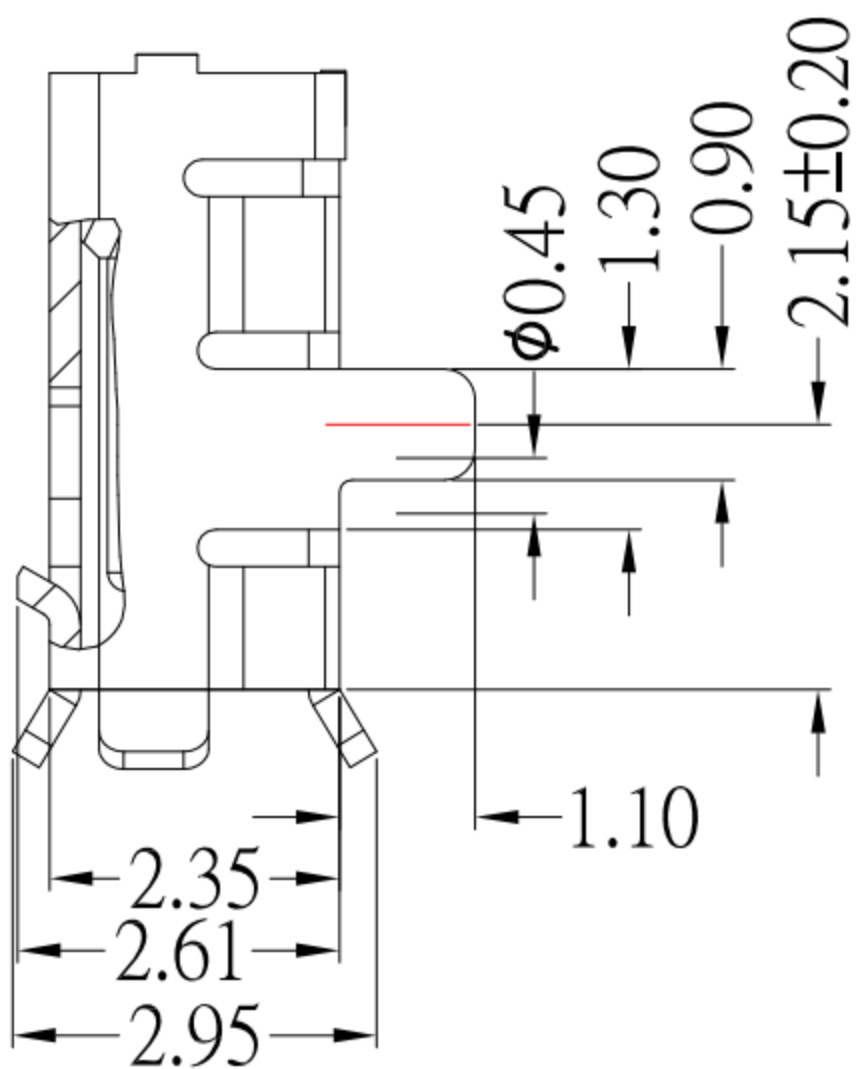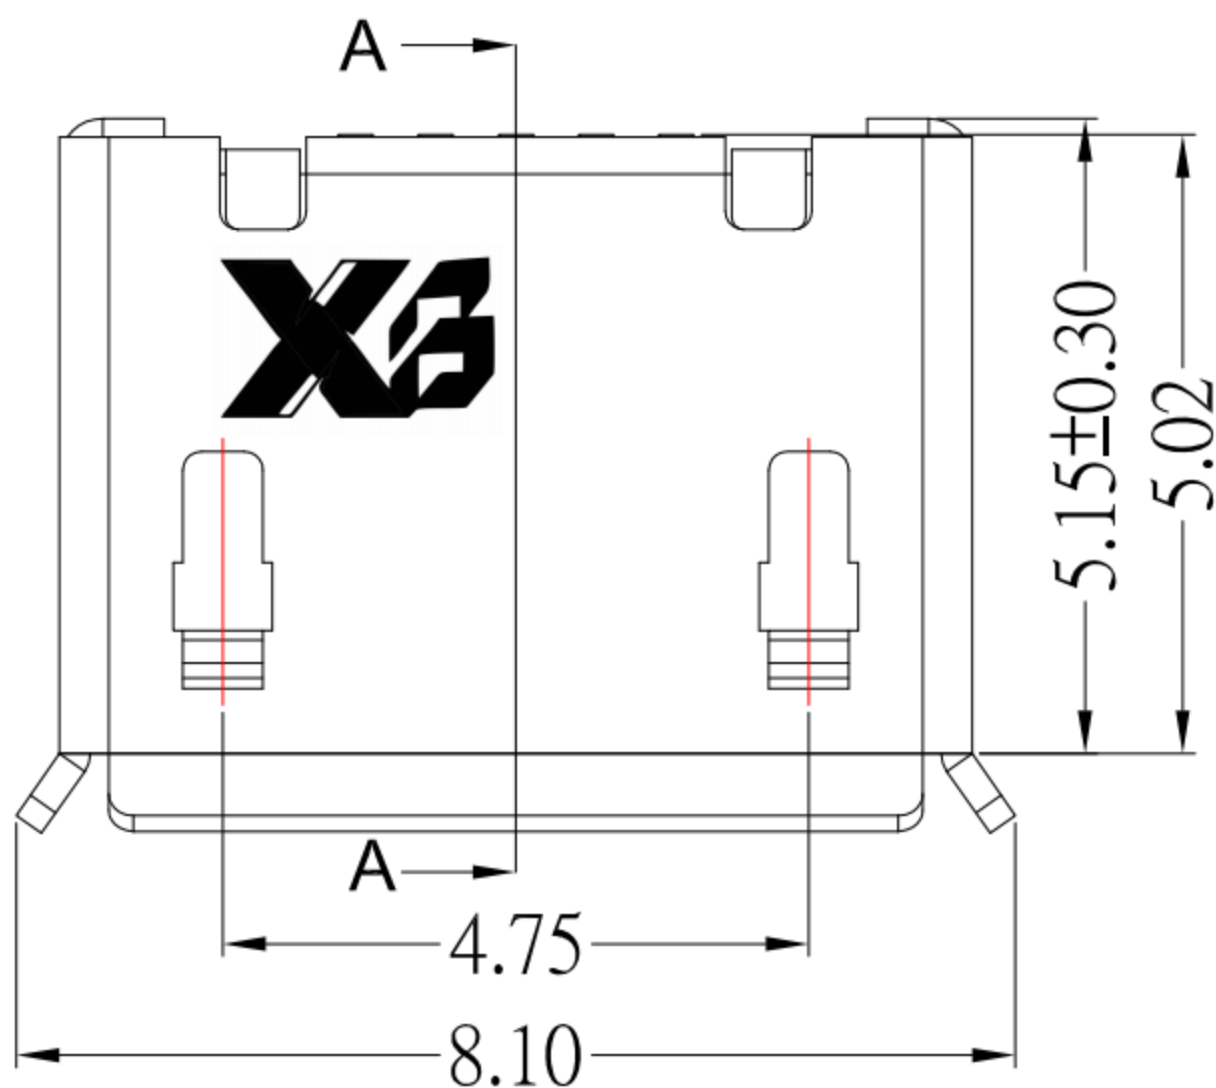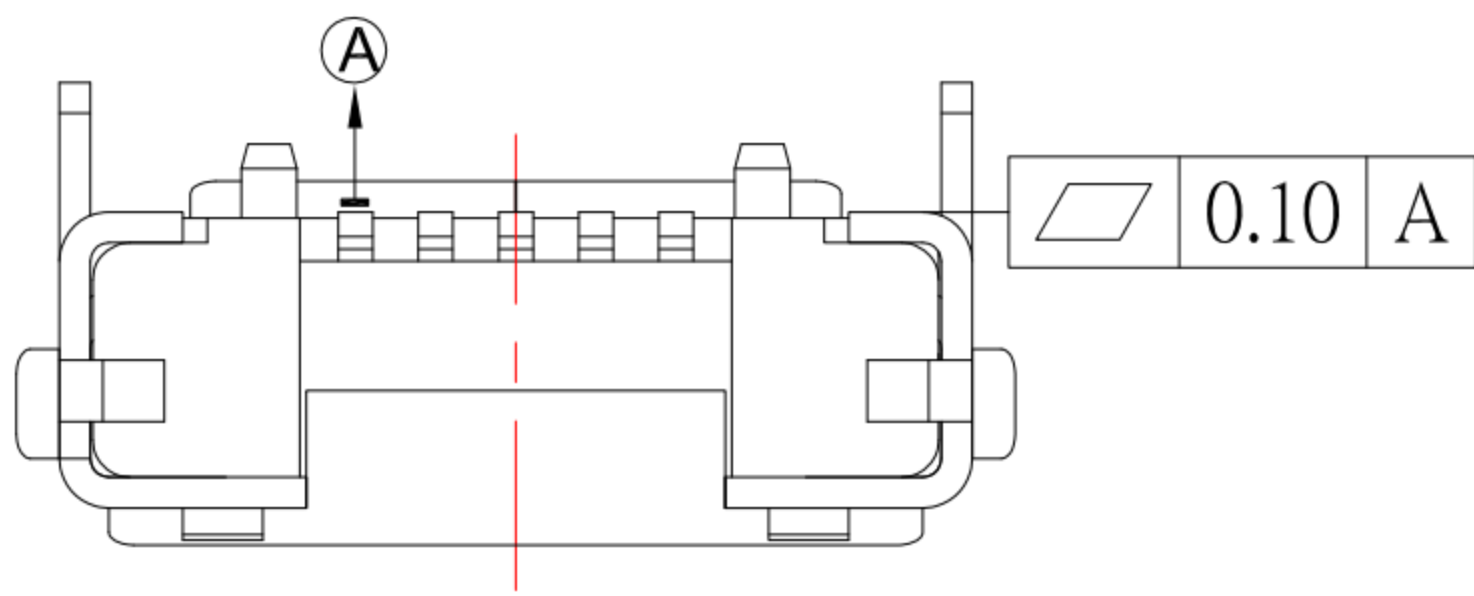

PCB EDGE

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

1.1 HOUSING: LCP,UL94V-0

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: BRASS / SUS

Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls

Nickel under plated overall

2.2 Shell: Nickel or Tin under Plated surface layer

3.SPECIFICATION:

3.1 CURRENT RATING: 1.0 A

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 V(ac) FOR 1min

3.3 CONTACT RESISTANCE: 50 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 TEMPERATURE RANGE: -30°C ~ +80°C




东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

01/24/22

CHECKED BY:

Jacky Chen

DATE

01/24/22

APPROVED BY:

Tony Kao

DATE

01/24/22

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

Micro usb b type Shell DIP7.15+後貼

MRUSB-5B-D6x-S347

MRUSB-5B-D6x-S347

SIZE

A4

VER

R2

2

新增SHELL選項

Jack

012422

1

更新尺寸

Jack

031219

ITEM NO.

DESCRIPTION

DRAWN

DATE