



MRUSB-5B-ED9x-S347

SHELL鍍層:

TN
NI

NOTES:

1.MATERIAL:

- 1.1 HOUSING: LCP
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHELL: BRASS








2.Finish:

- 2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall

- 2.2 Shell: Tin or Nickel under Plated surface layer

3.SPECIFICATION:

- 3.1 CURRENT RATING: 1.0 A MAX
- 3.2 DIELECTRIC WITHSSTANDING VOLTAGE:
100 V(ac) FOR 1min
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
- 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
- 3.7 LIFE: 10,000 CYCLES
- 3.8 TEMPERATURE RANGE: -30℃ ~ +80℃

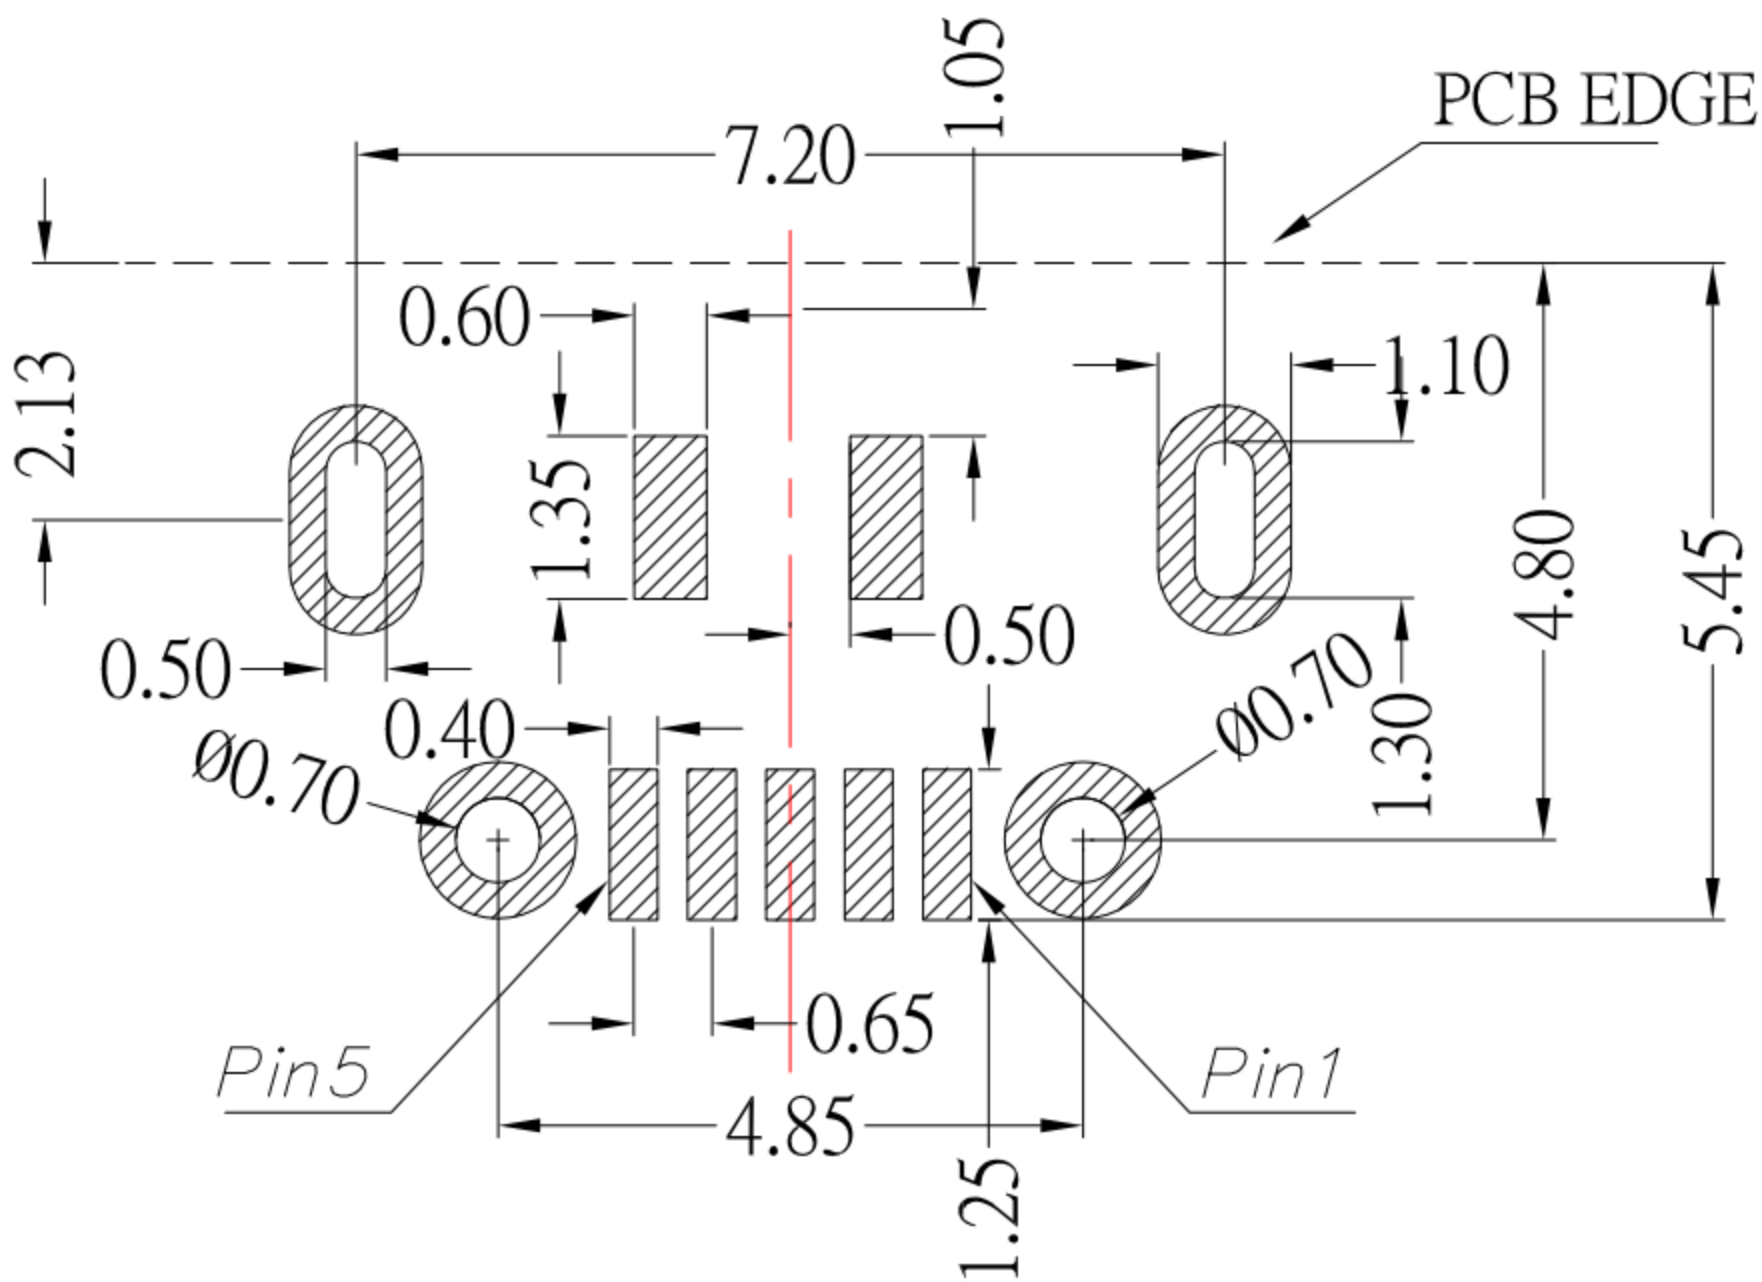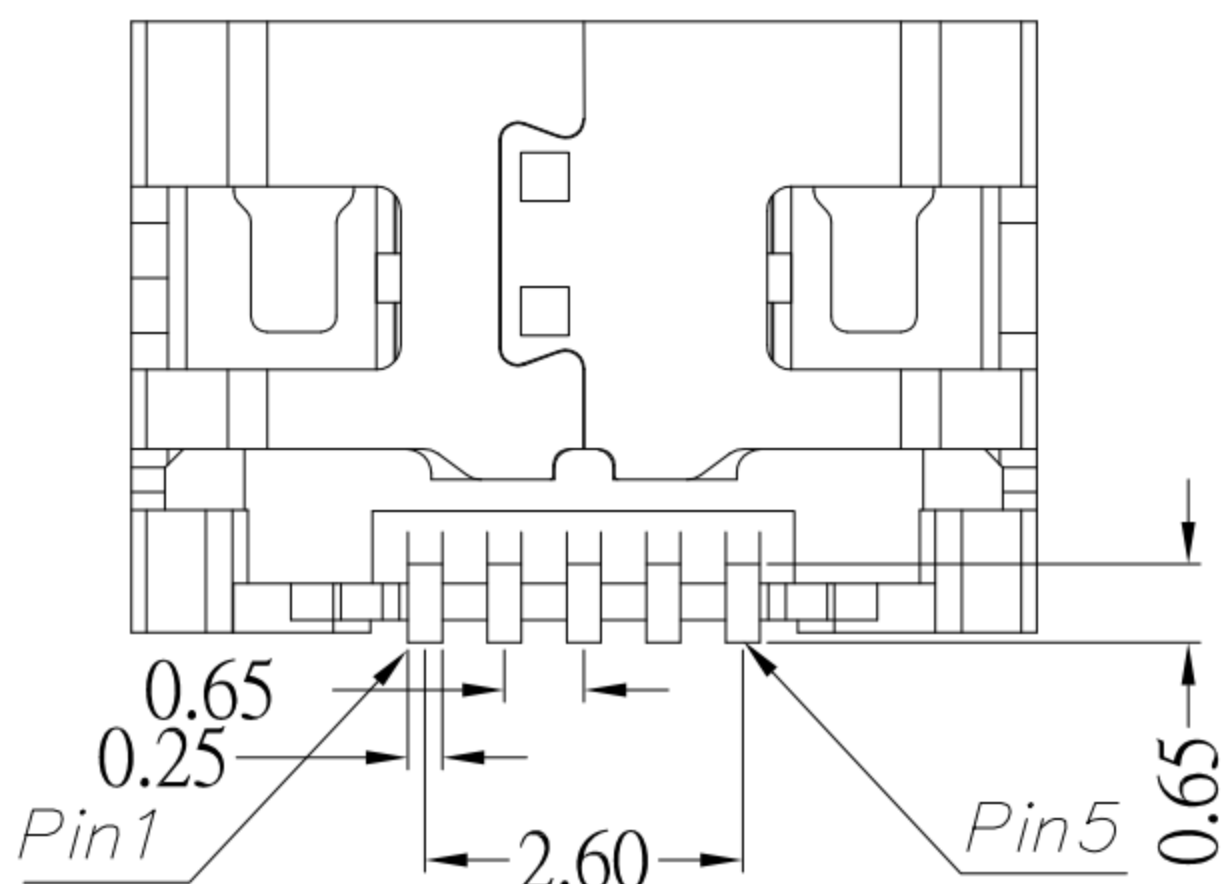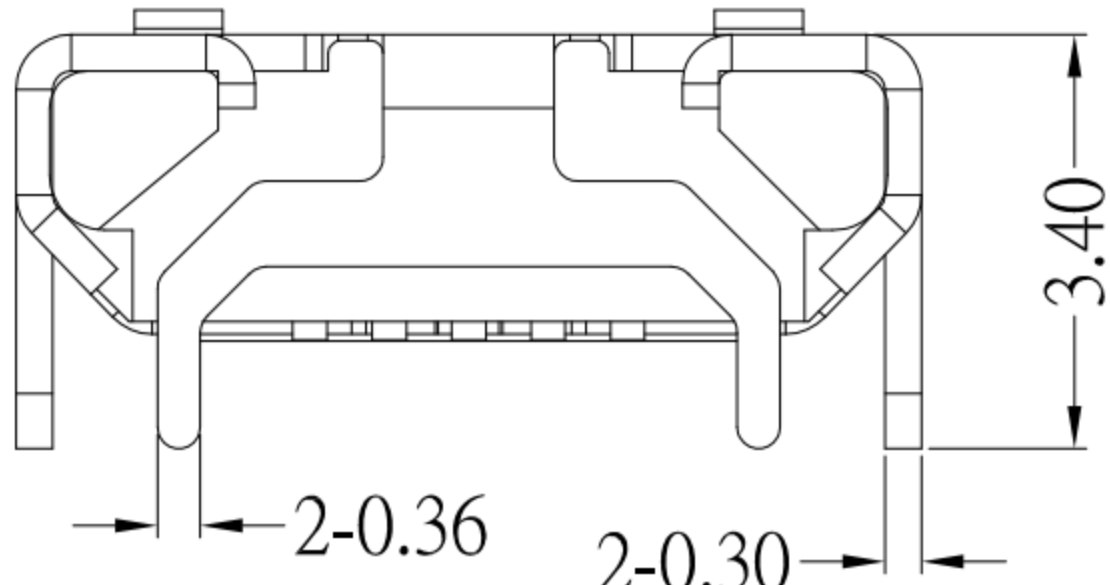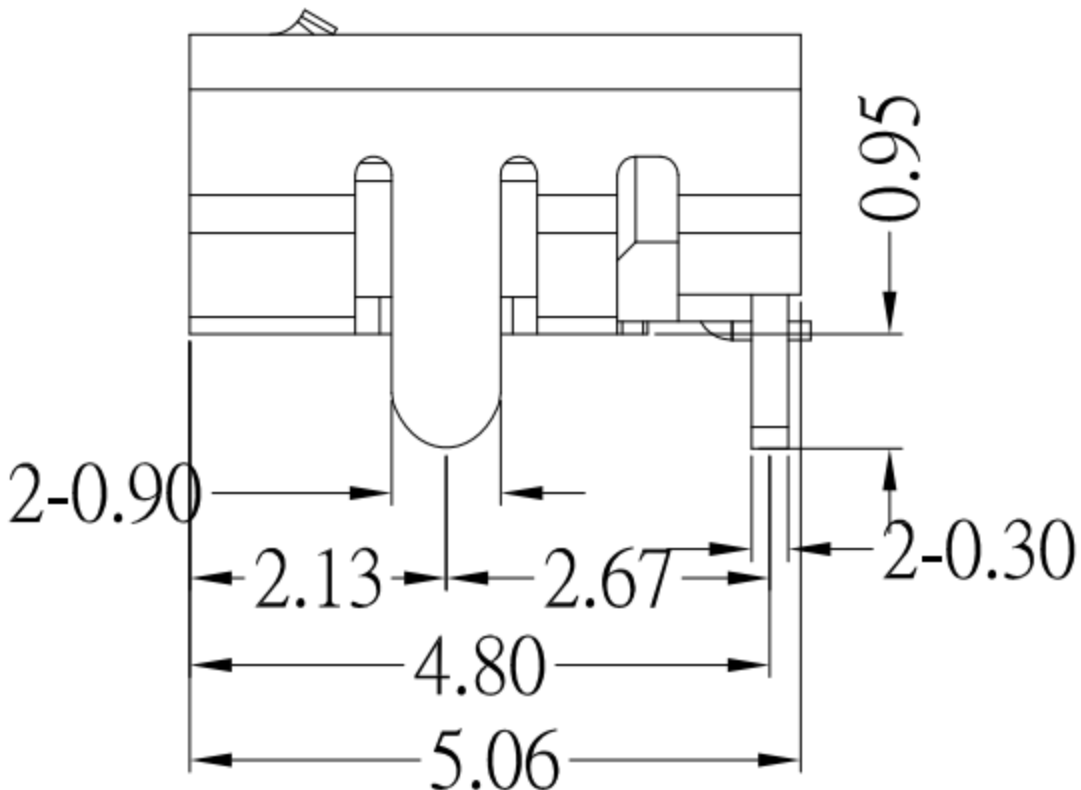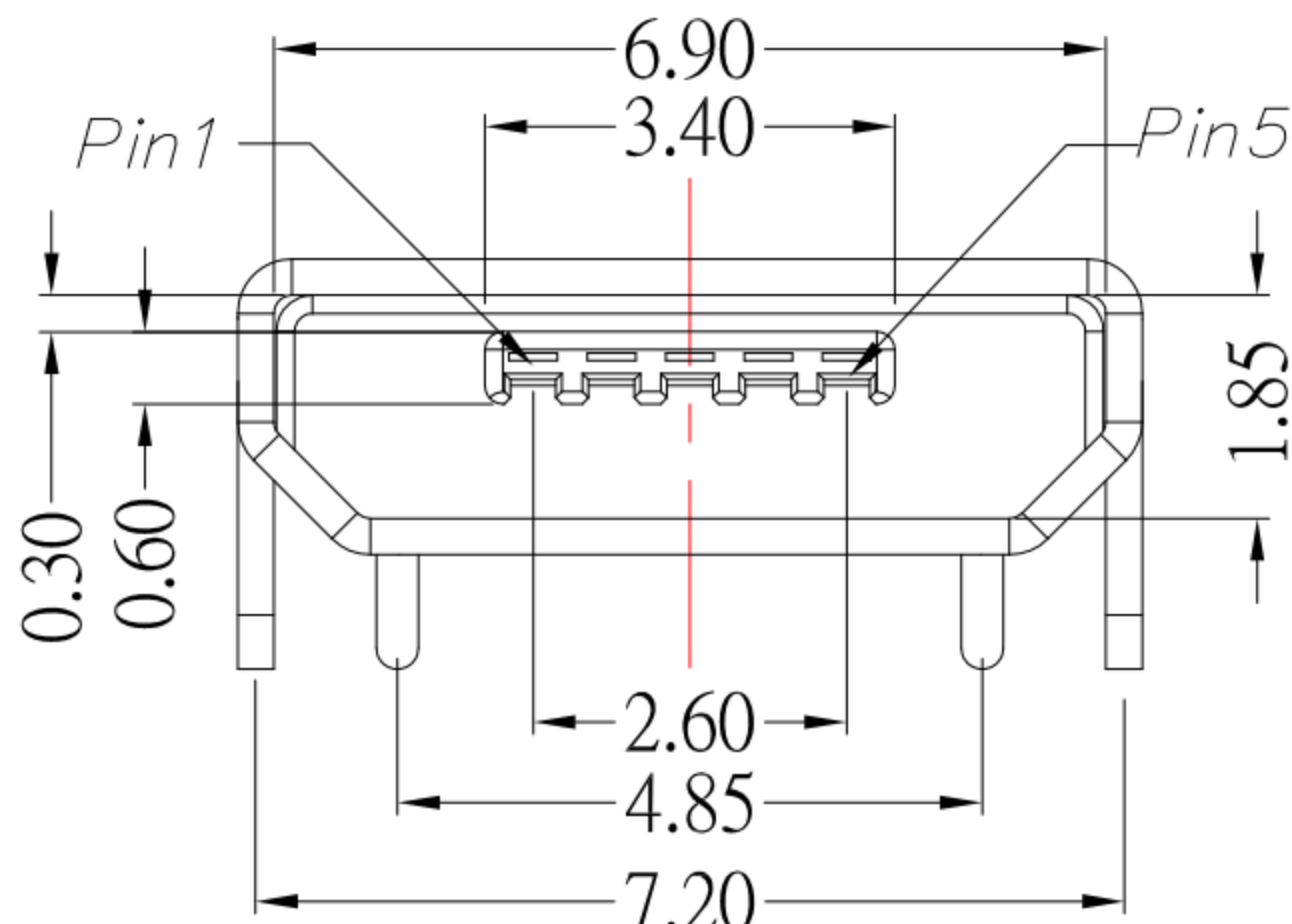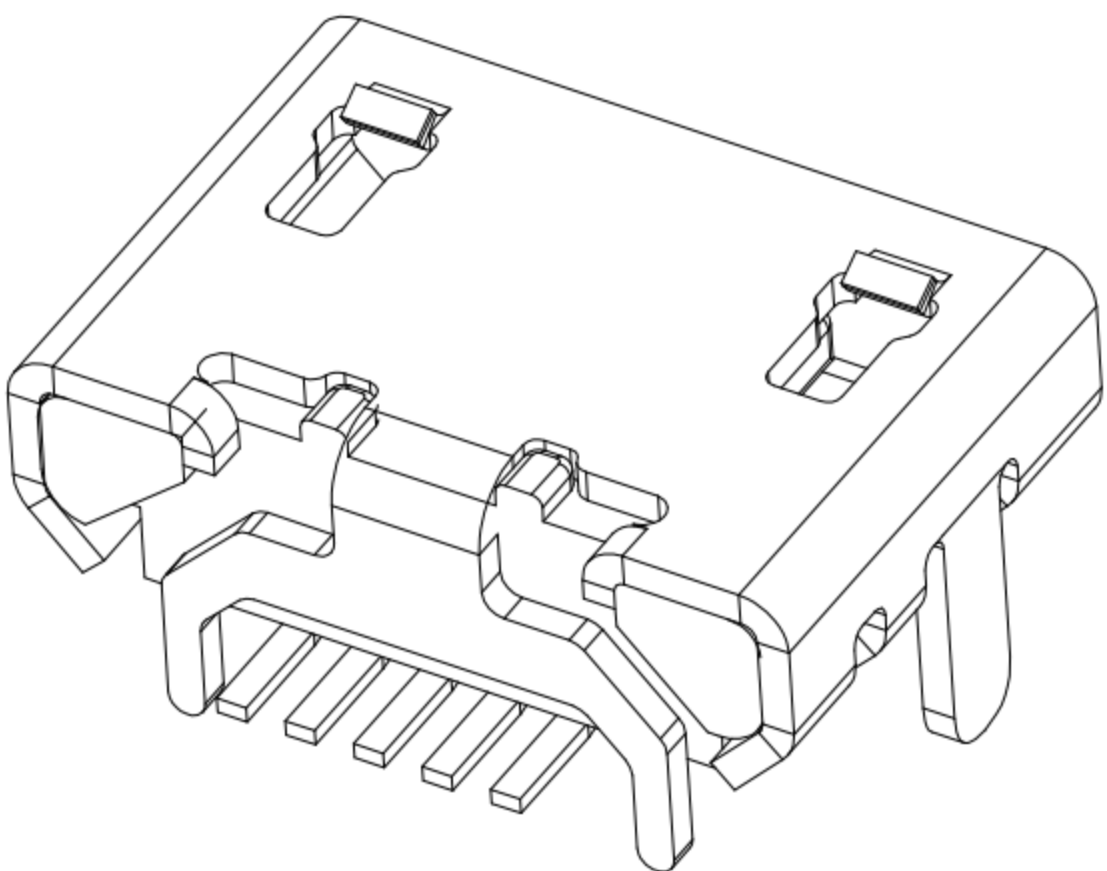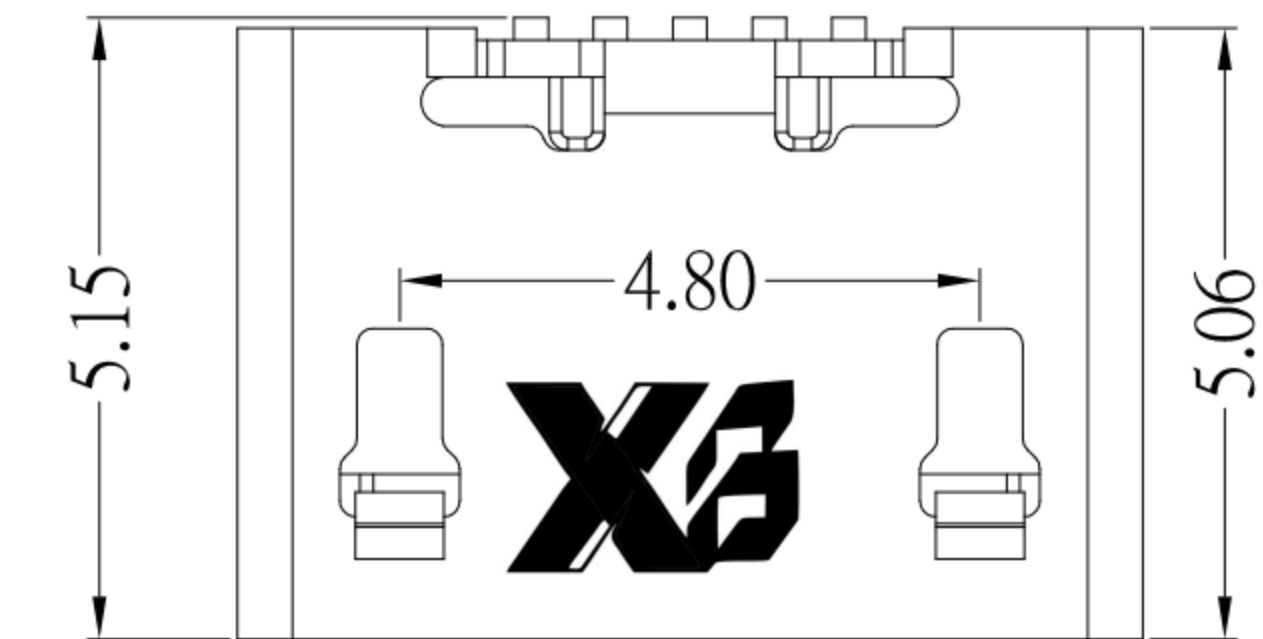


P.C.B LAYOUT MOUNTING PATTERN



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

Switch Connector

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	07/05/18				
CHECKED BY:	DATE	FINISH		MODLE	MICRO USB 5BF 牛角型(PH7.15-4.85),無捲邊
Jacky Chen	07/05/18				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5B-ED9x-S347
Tony Kao	07/05/18	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-ED9x-S347
					SIZE A4
					VER R1