

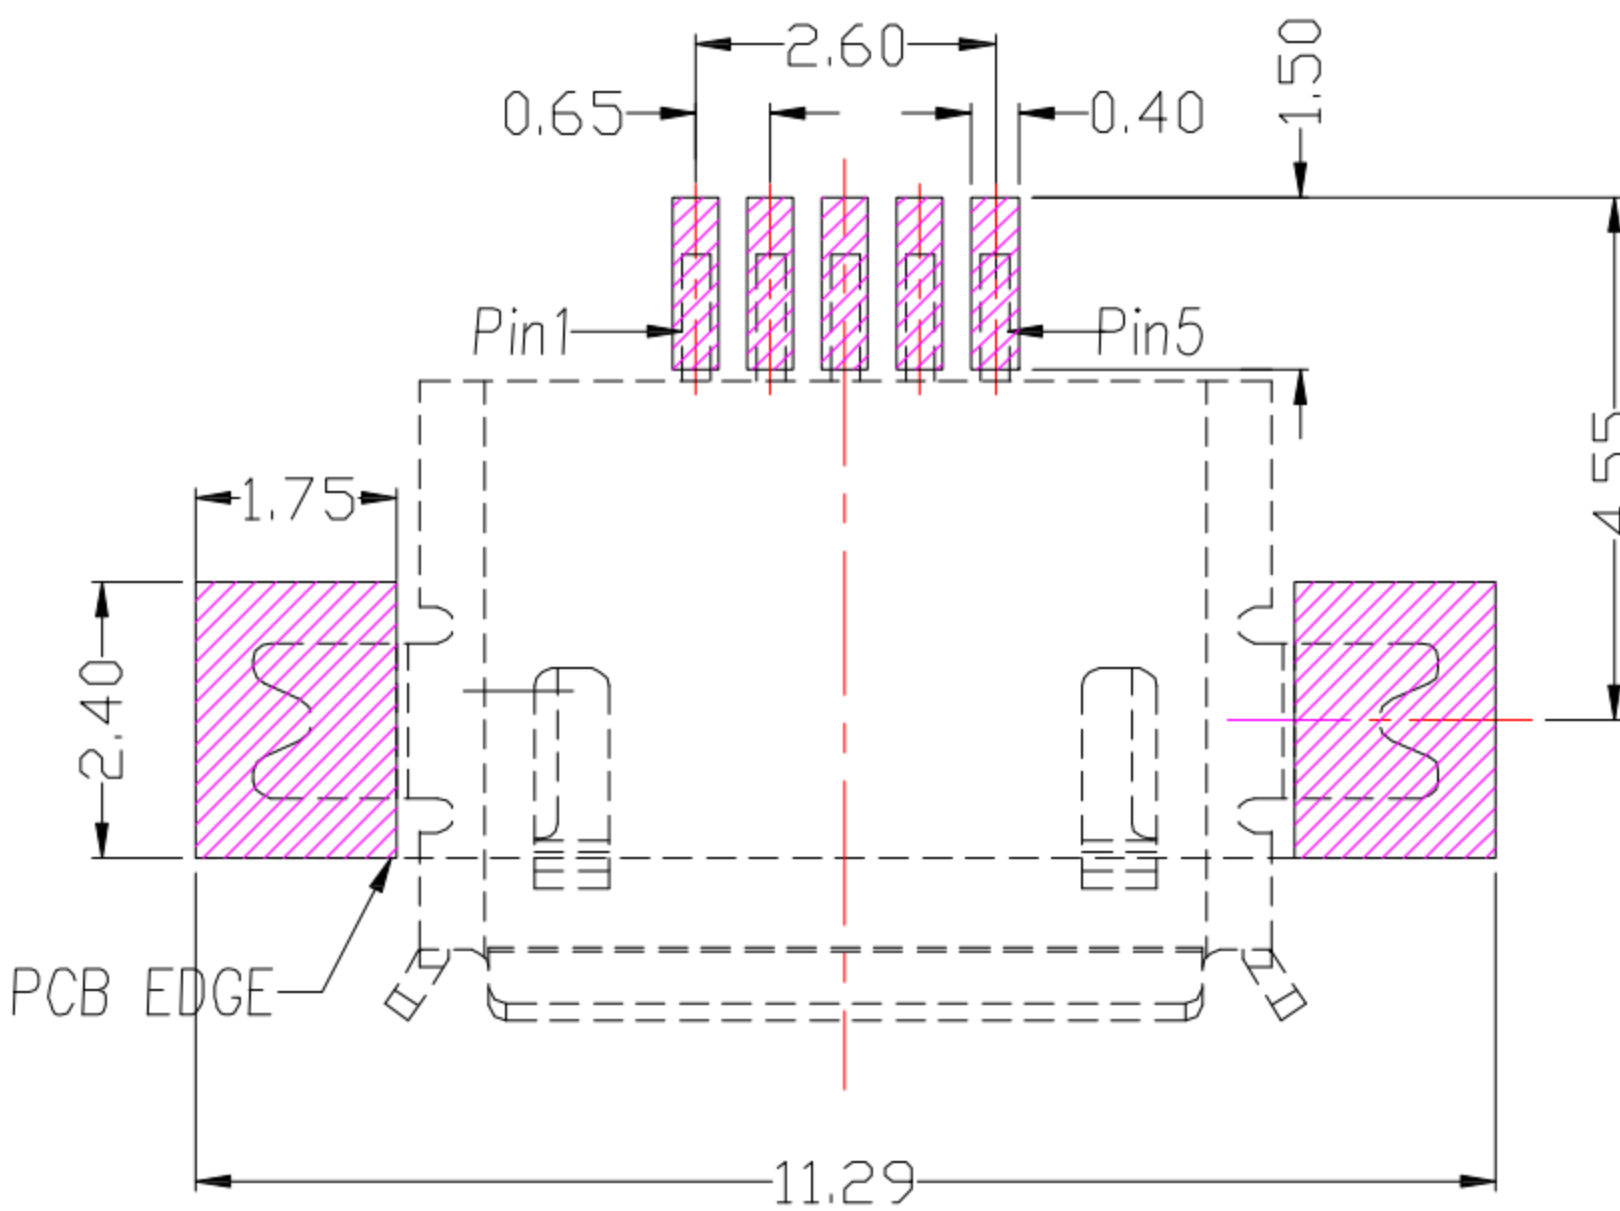
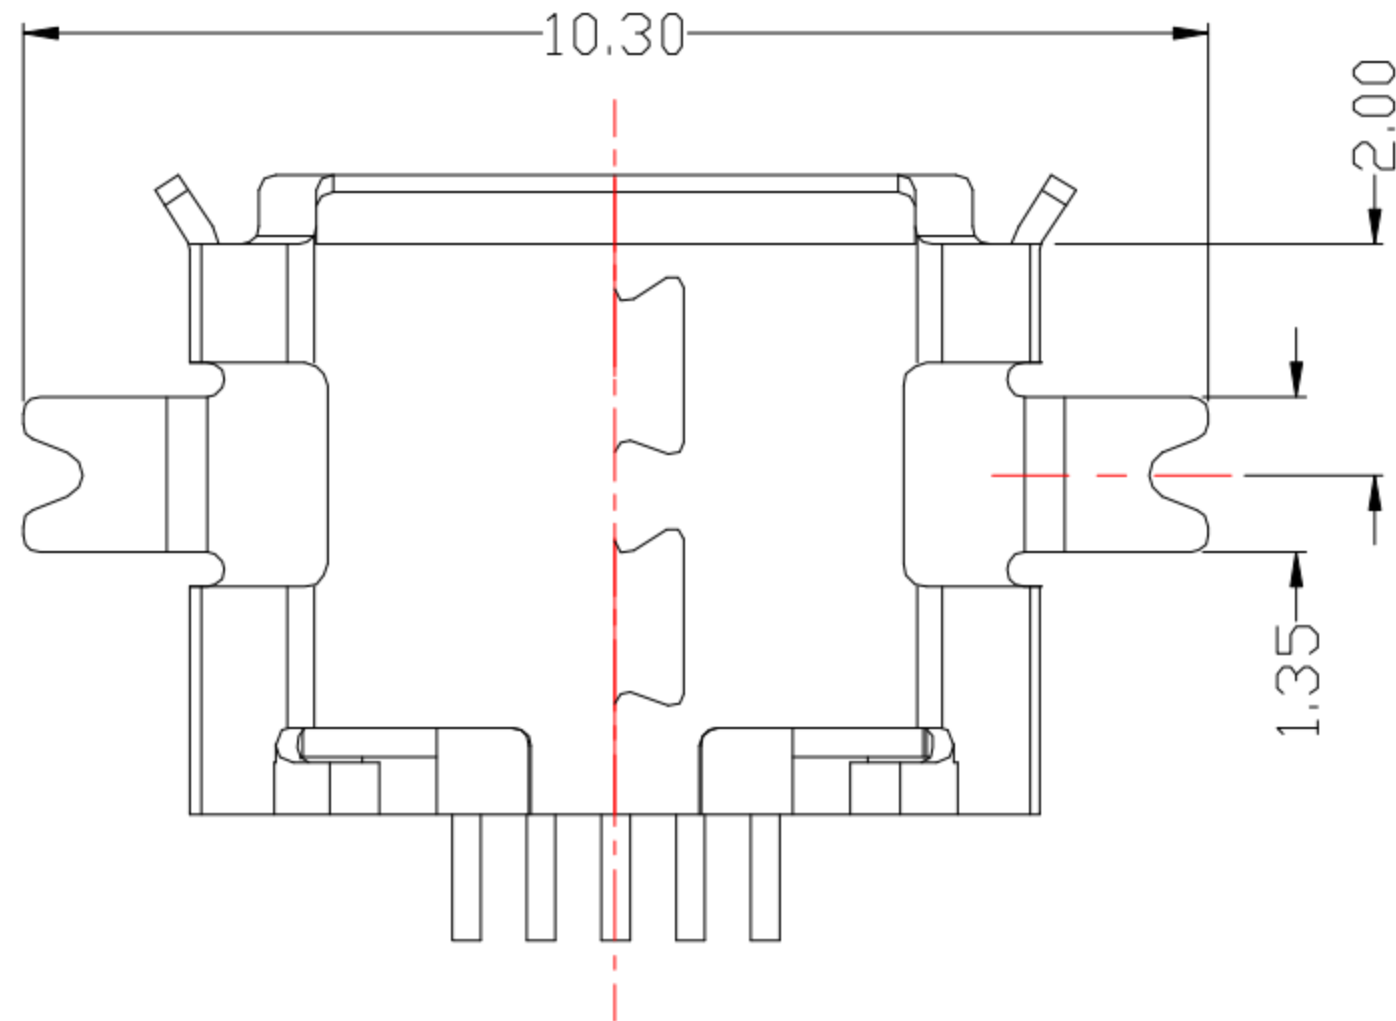
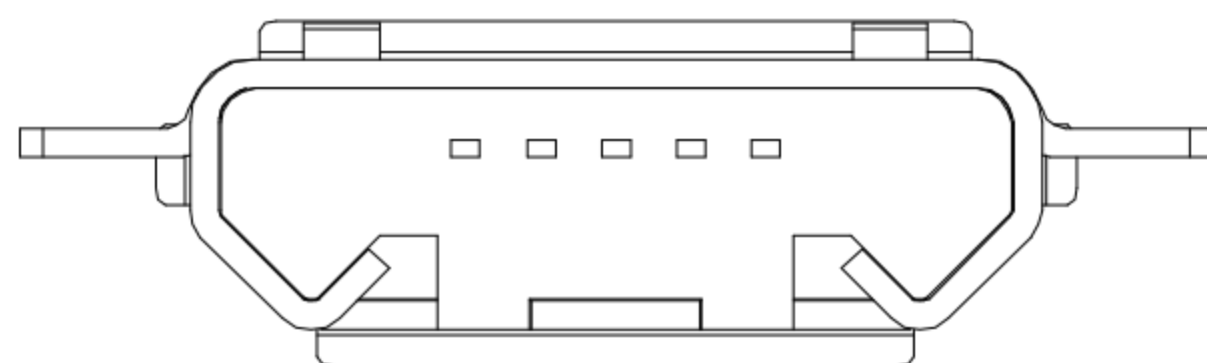
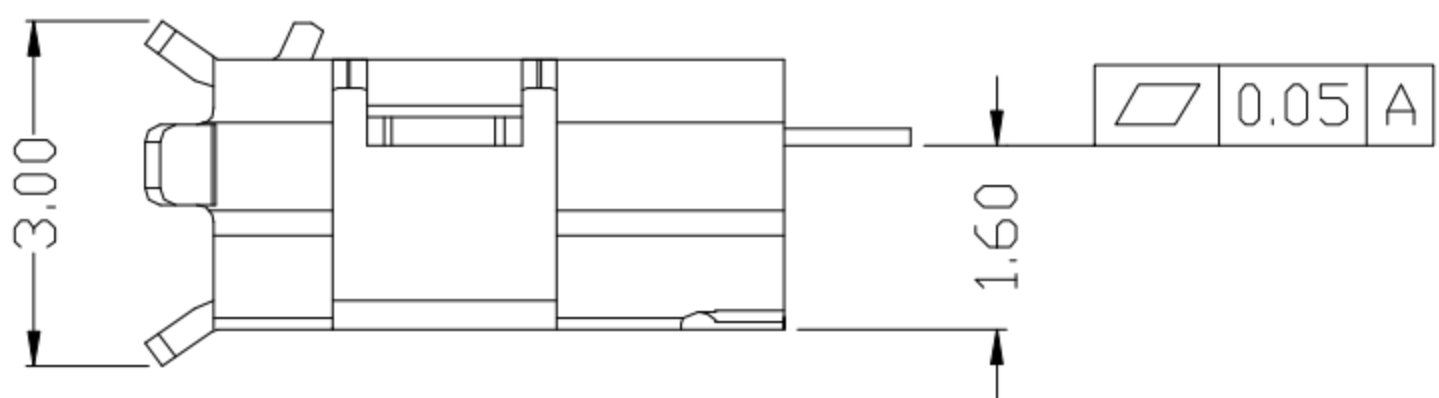
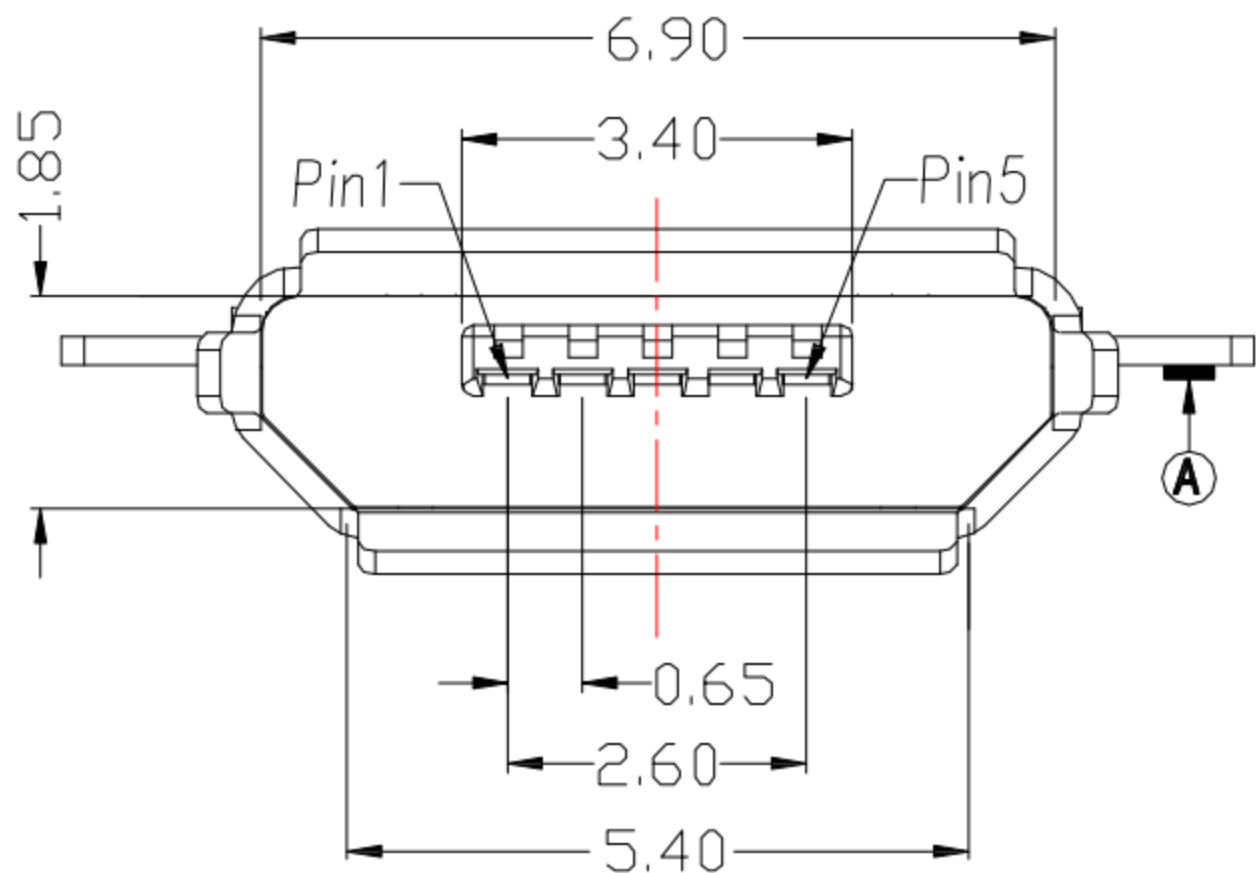


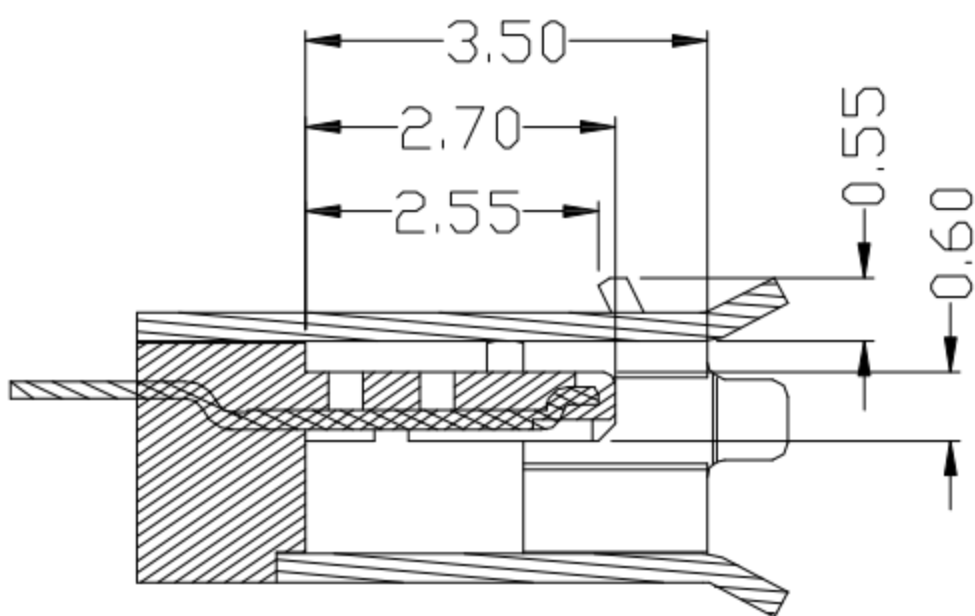

MRUSB-5B-M17x-S347

SHELL鍍層:

TN
NI

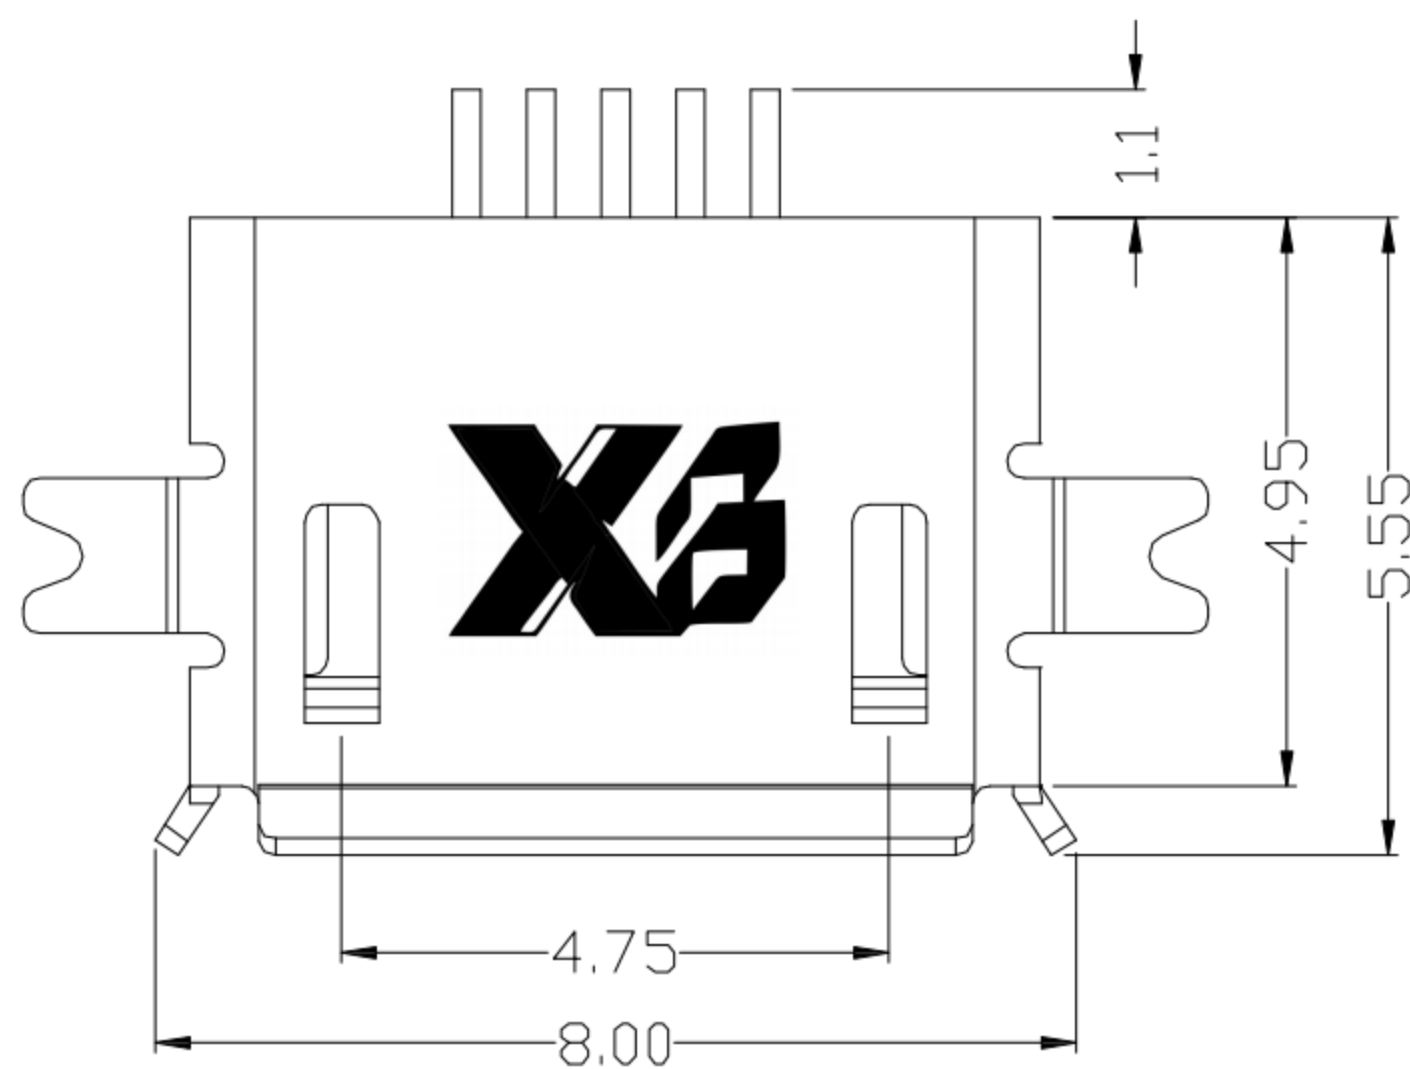

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

- 1.1 HOUSING: LCP, UL94V-0 ,Black
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHELL: BRASS

FINISH:

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR
TIN UNDER PLATED SURFACE LAYER


3.SPECIFICATION:

- 3.1 RATING: 1.0A
- 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC FOR 1 MIN
- 3.3 CONTACT RESISTANCE: 50 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
- 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
- 3.7 TEMPERATURE RANGE: -30°C ~ +80°C



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	---	-------	----

2	更新底部樣式	Jack	080119
1	更新為A0版	Jack	010417
ITEM NO.	DESCRIPTION	DRAWN	DATE

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	08/01/19	FINISH		MODLE	MICRO USB 2 腳沉板/板下1.6mm
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5B-M17x-S347
Jacky Chen	08/01/19	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-M17x-S347
APPROVED BY:	DATE				
Tony Kao	08/01/19				