

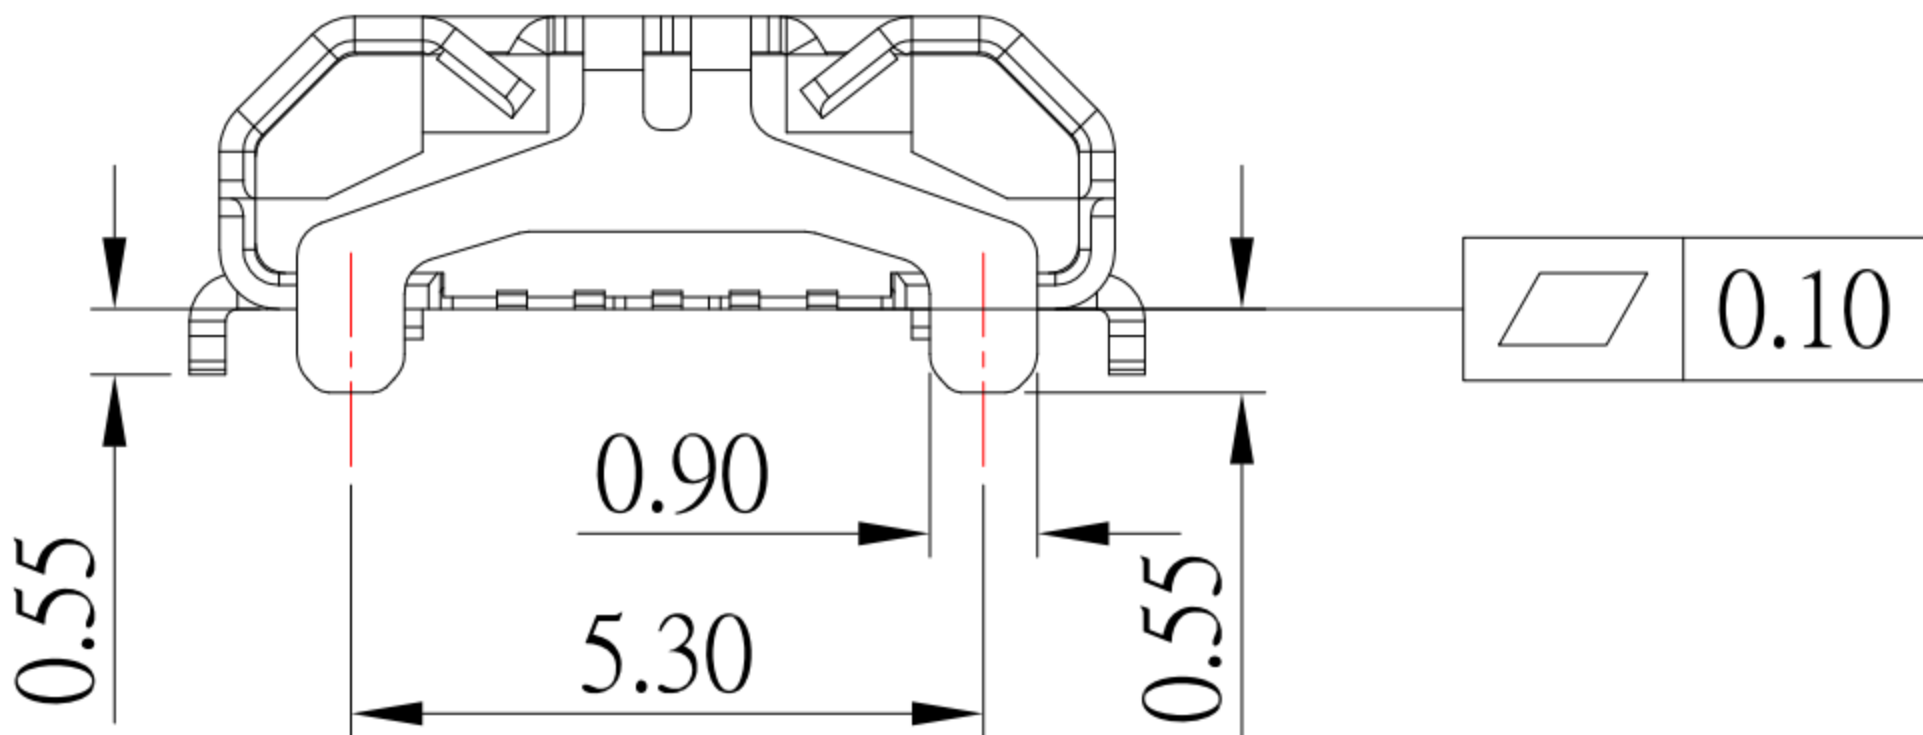
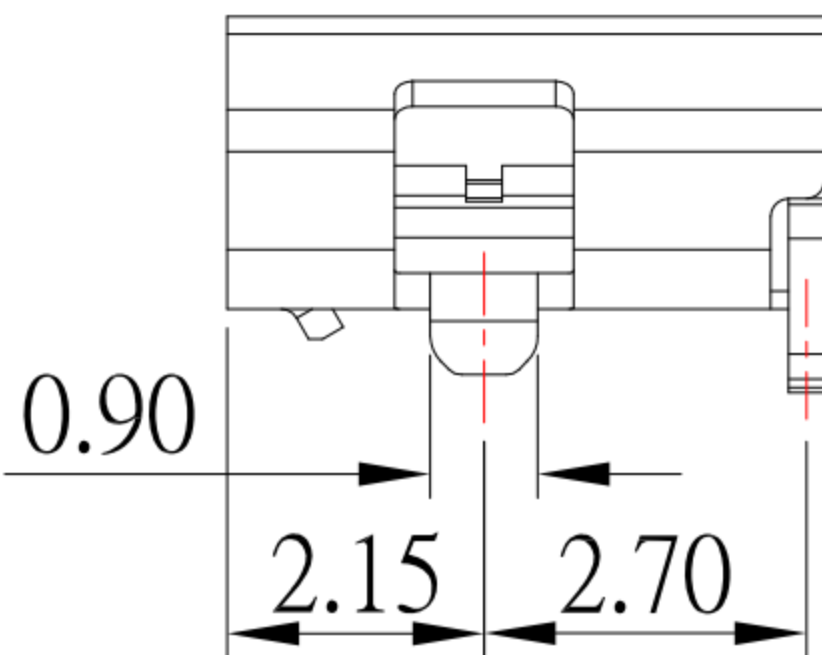


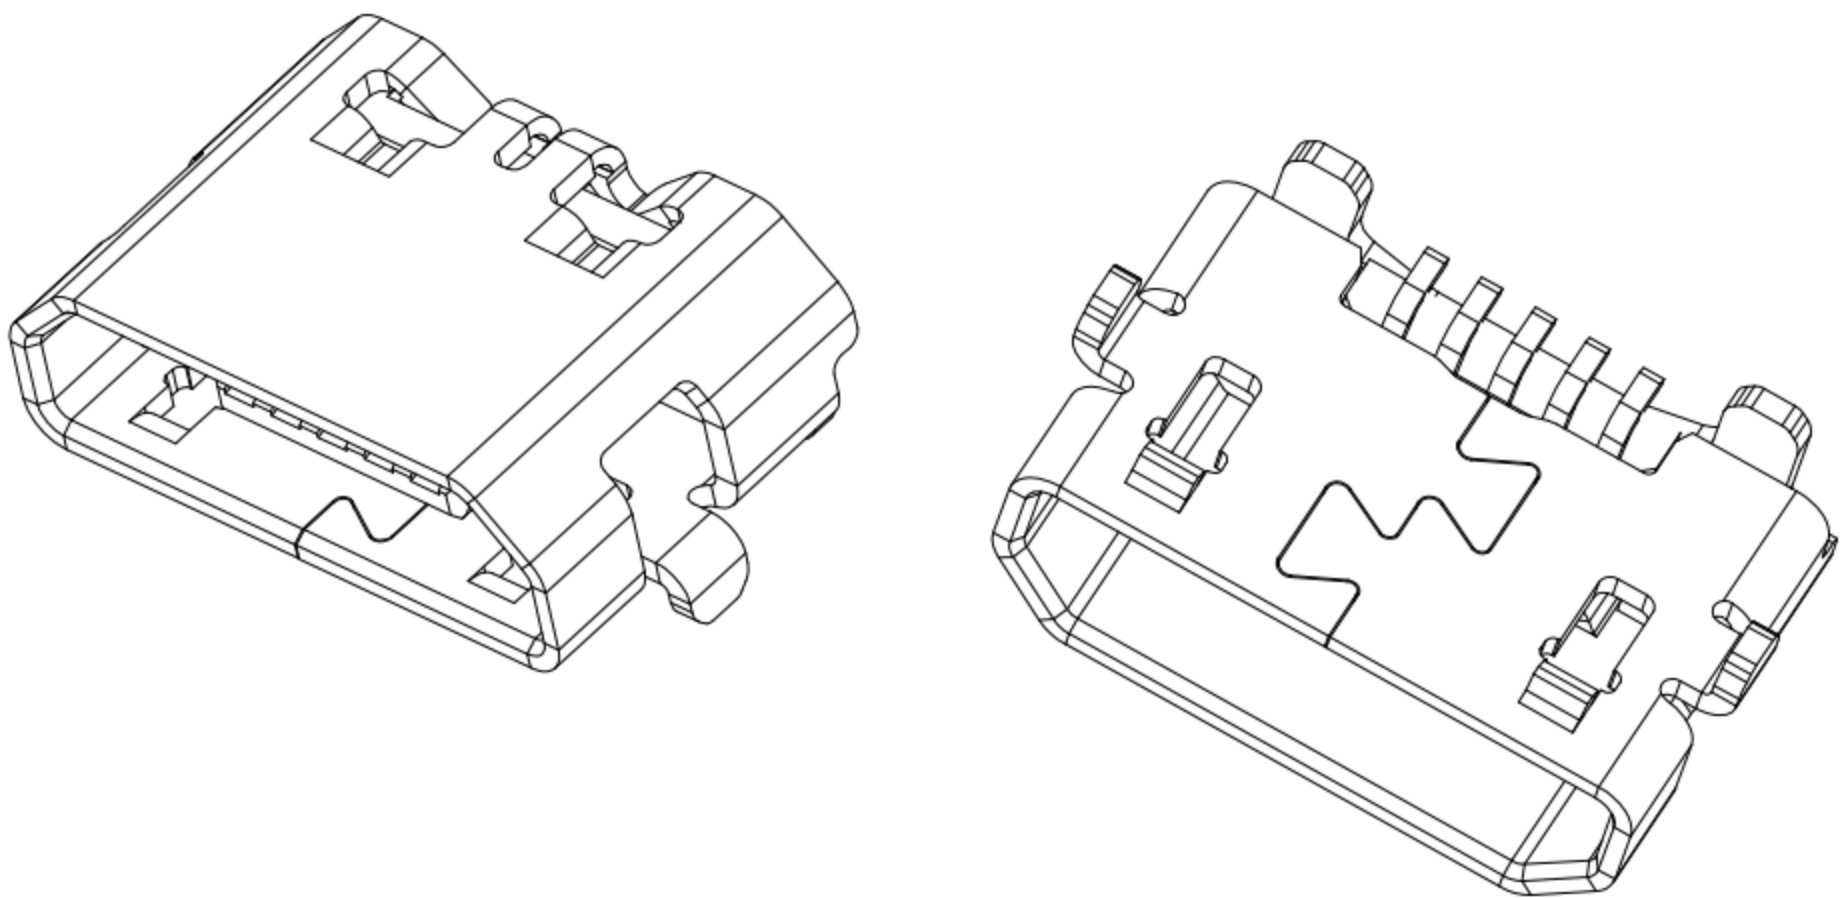

MRUSB-5B-RV4x-S331

SHELL鍍層:

TN
NI

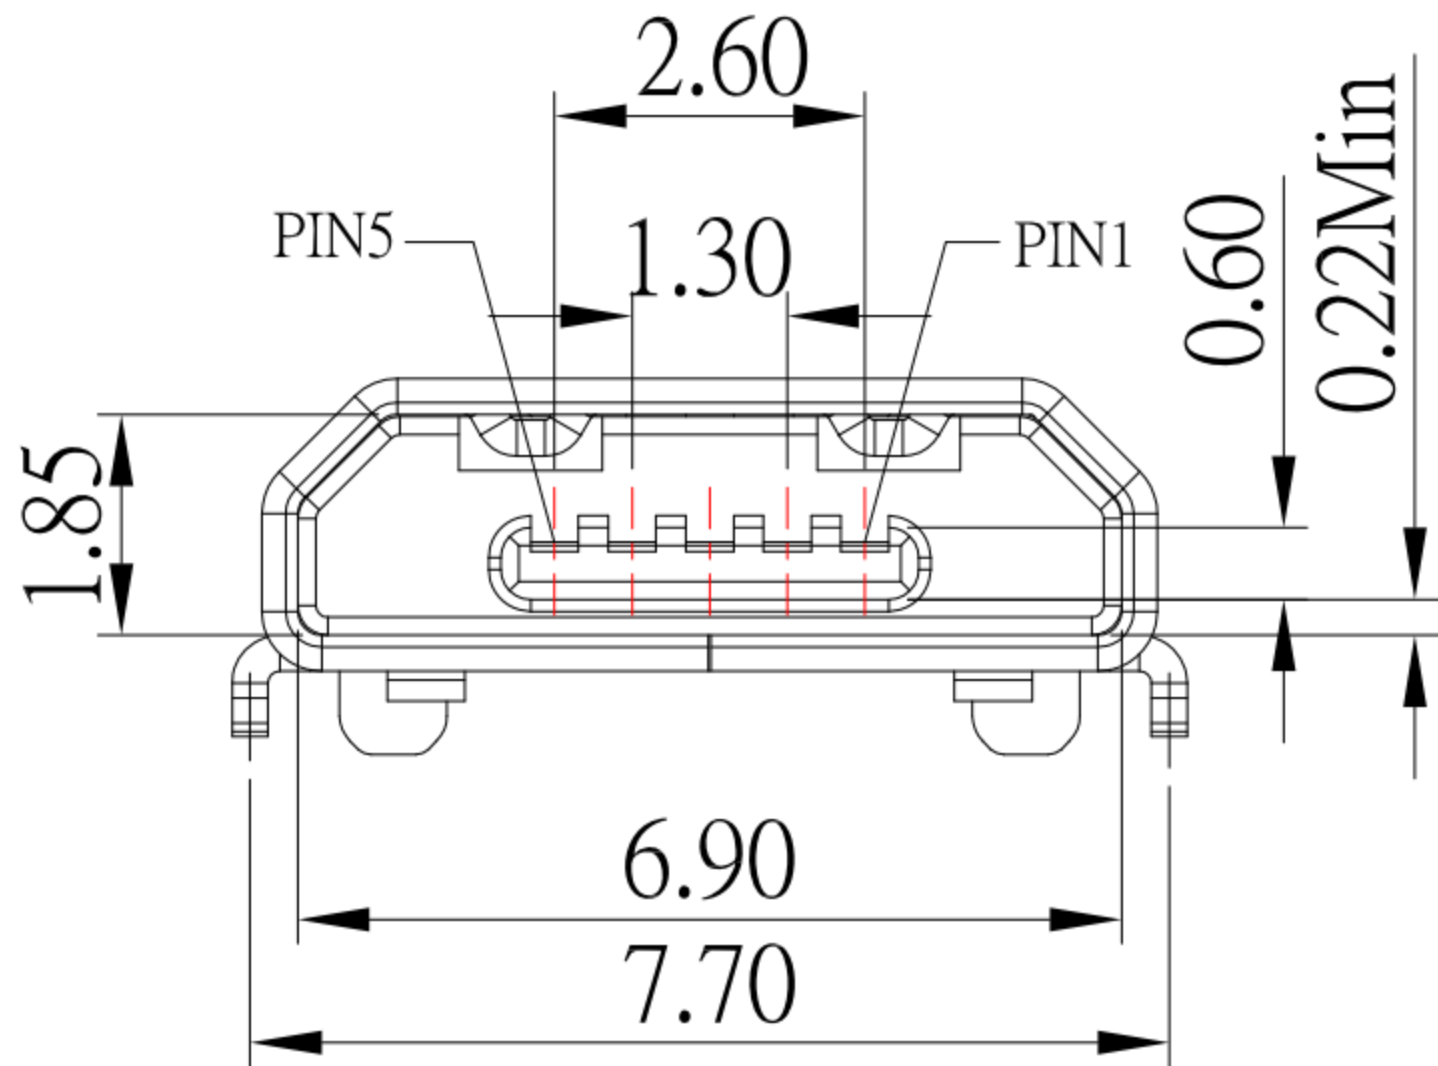

NOTES:

MATERIAL:



- 1.1 HOUSING: PA10T,UL94V-0 ,Black
- 1.2 CONTACT: BRASS
- 1.3 SHELL: SUS

Finish:

- 2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls
Nickel under plated overall
- 2.2 Shell: Nickel under Plated surface layer or
Tin under Plated surface layer

3.SPECIFICATION:

- 3.1 RATING: 30V AC , 1.8 A MAX
- 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 250 VAC
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 TEMPERATURE RANGE: -30°C ~ +85°C

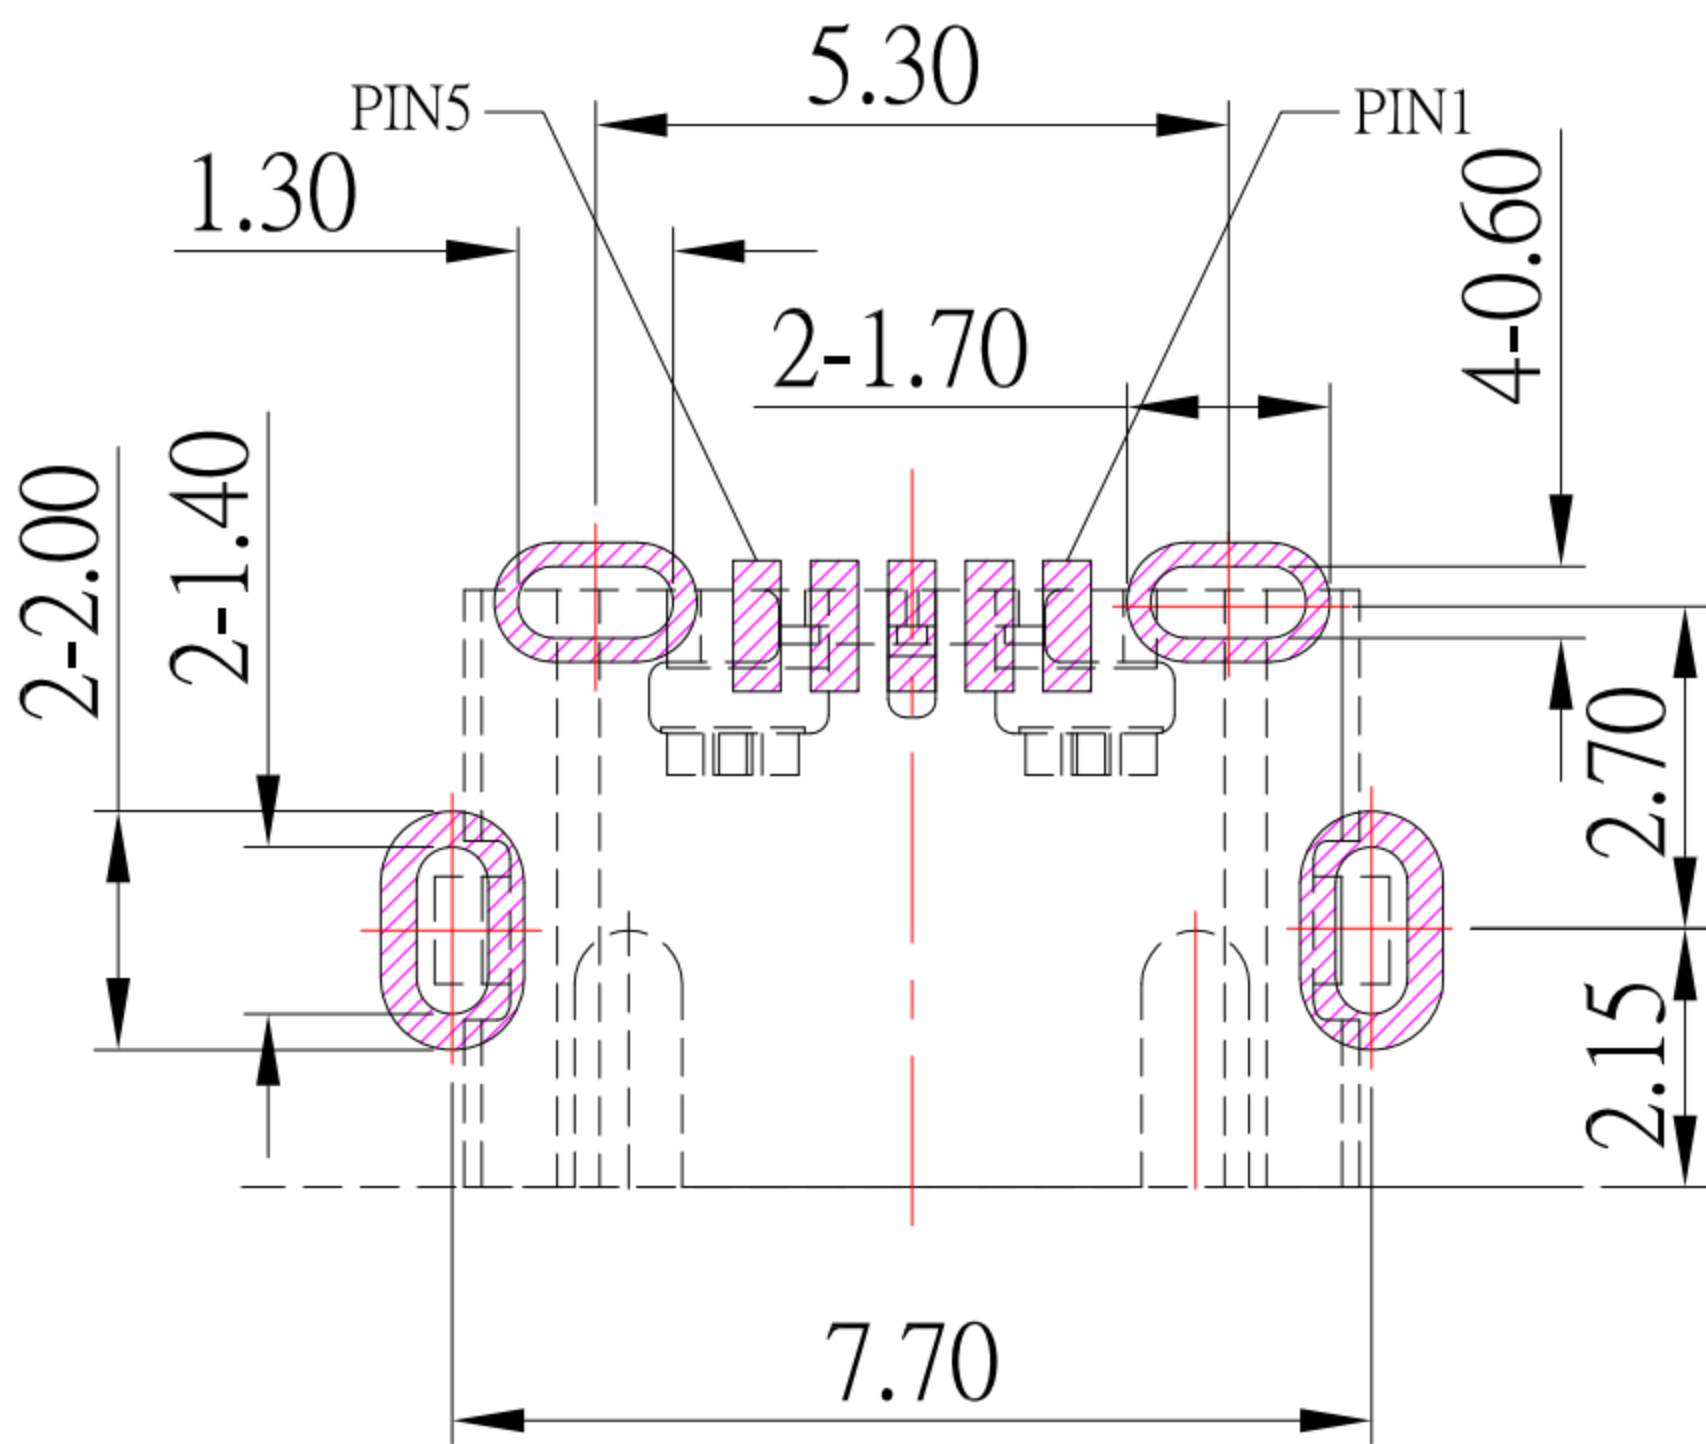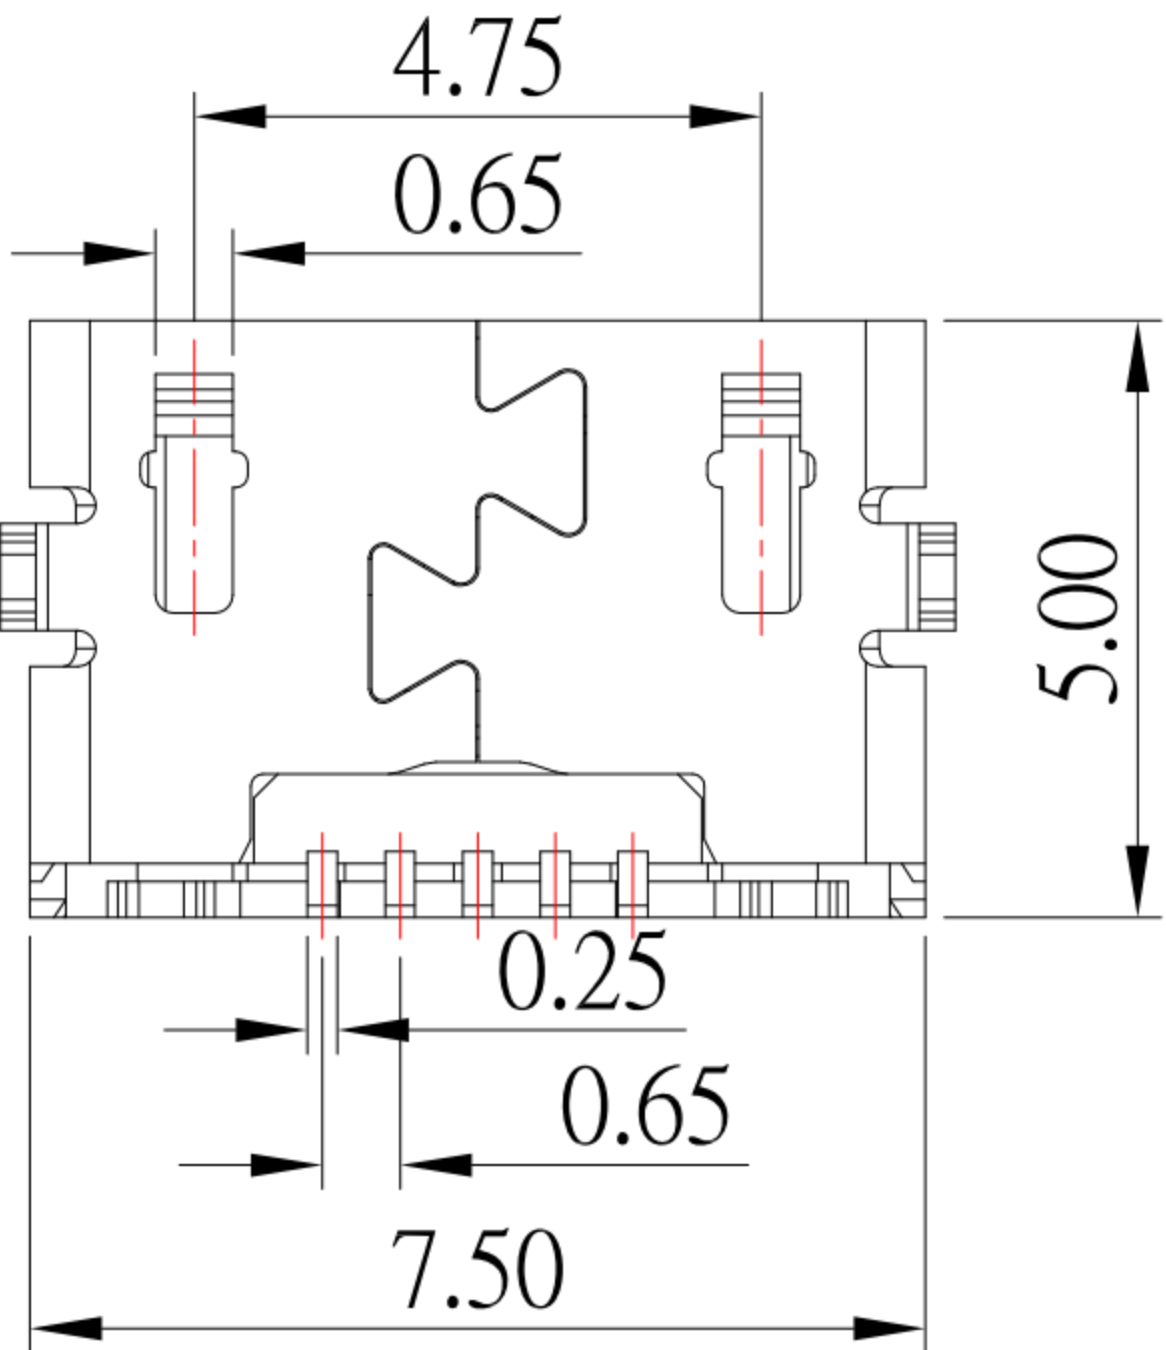


P.C.B LAYOUT MOUNTING PATTERN

7	更新pcb layout	Jack	120220
6	新增PIN編號	Jack	071818
5	更新尺寸	Jack	031417
4	更新為A0版	Jack	011717
3	新增pcb layout尺寸	Jack	052716
2	更新材質	Jack	030916
1	更新SPEC	Jack	012616
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	12/02/20	FINISH		MODLE	MICRO USB 反向平口 外殼4 腳插板 (PH:7.7-5.3mm)
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5B-RV4x-S331
Jacky Chen	12/02/20	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-RV4x-S331
APPROVED BY:	DATE				
Tony Kao	12/02/20				