

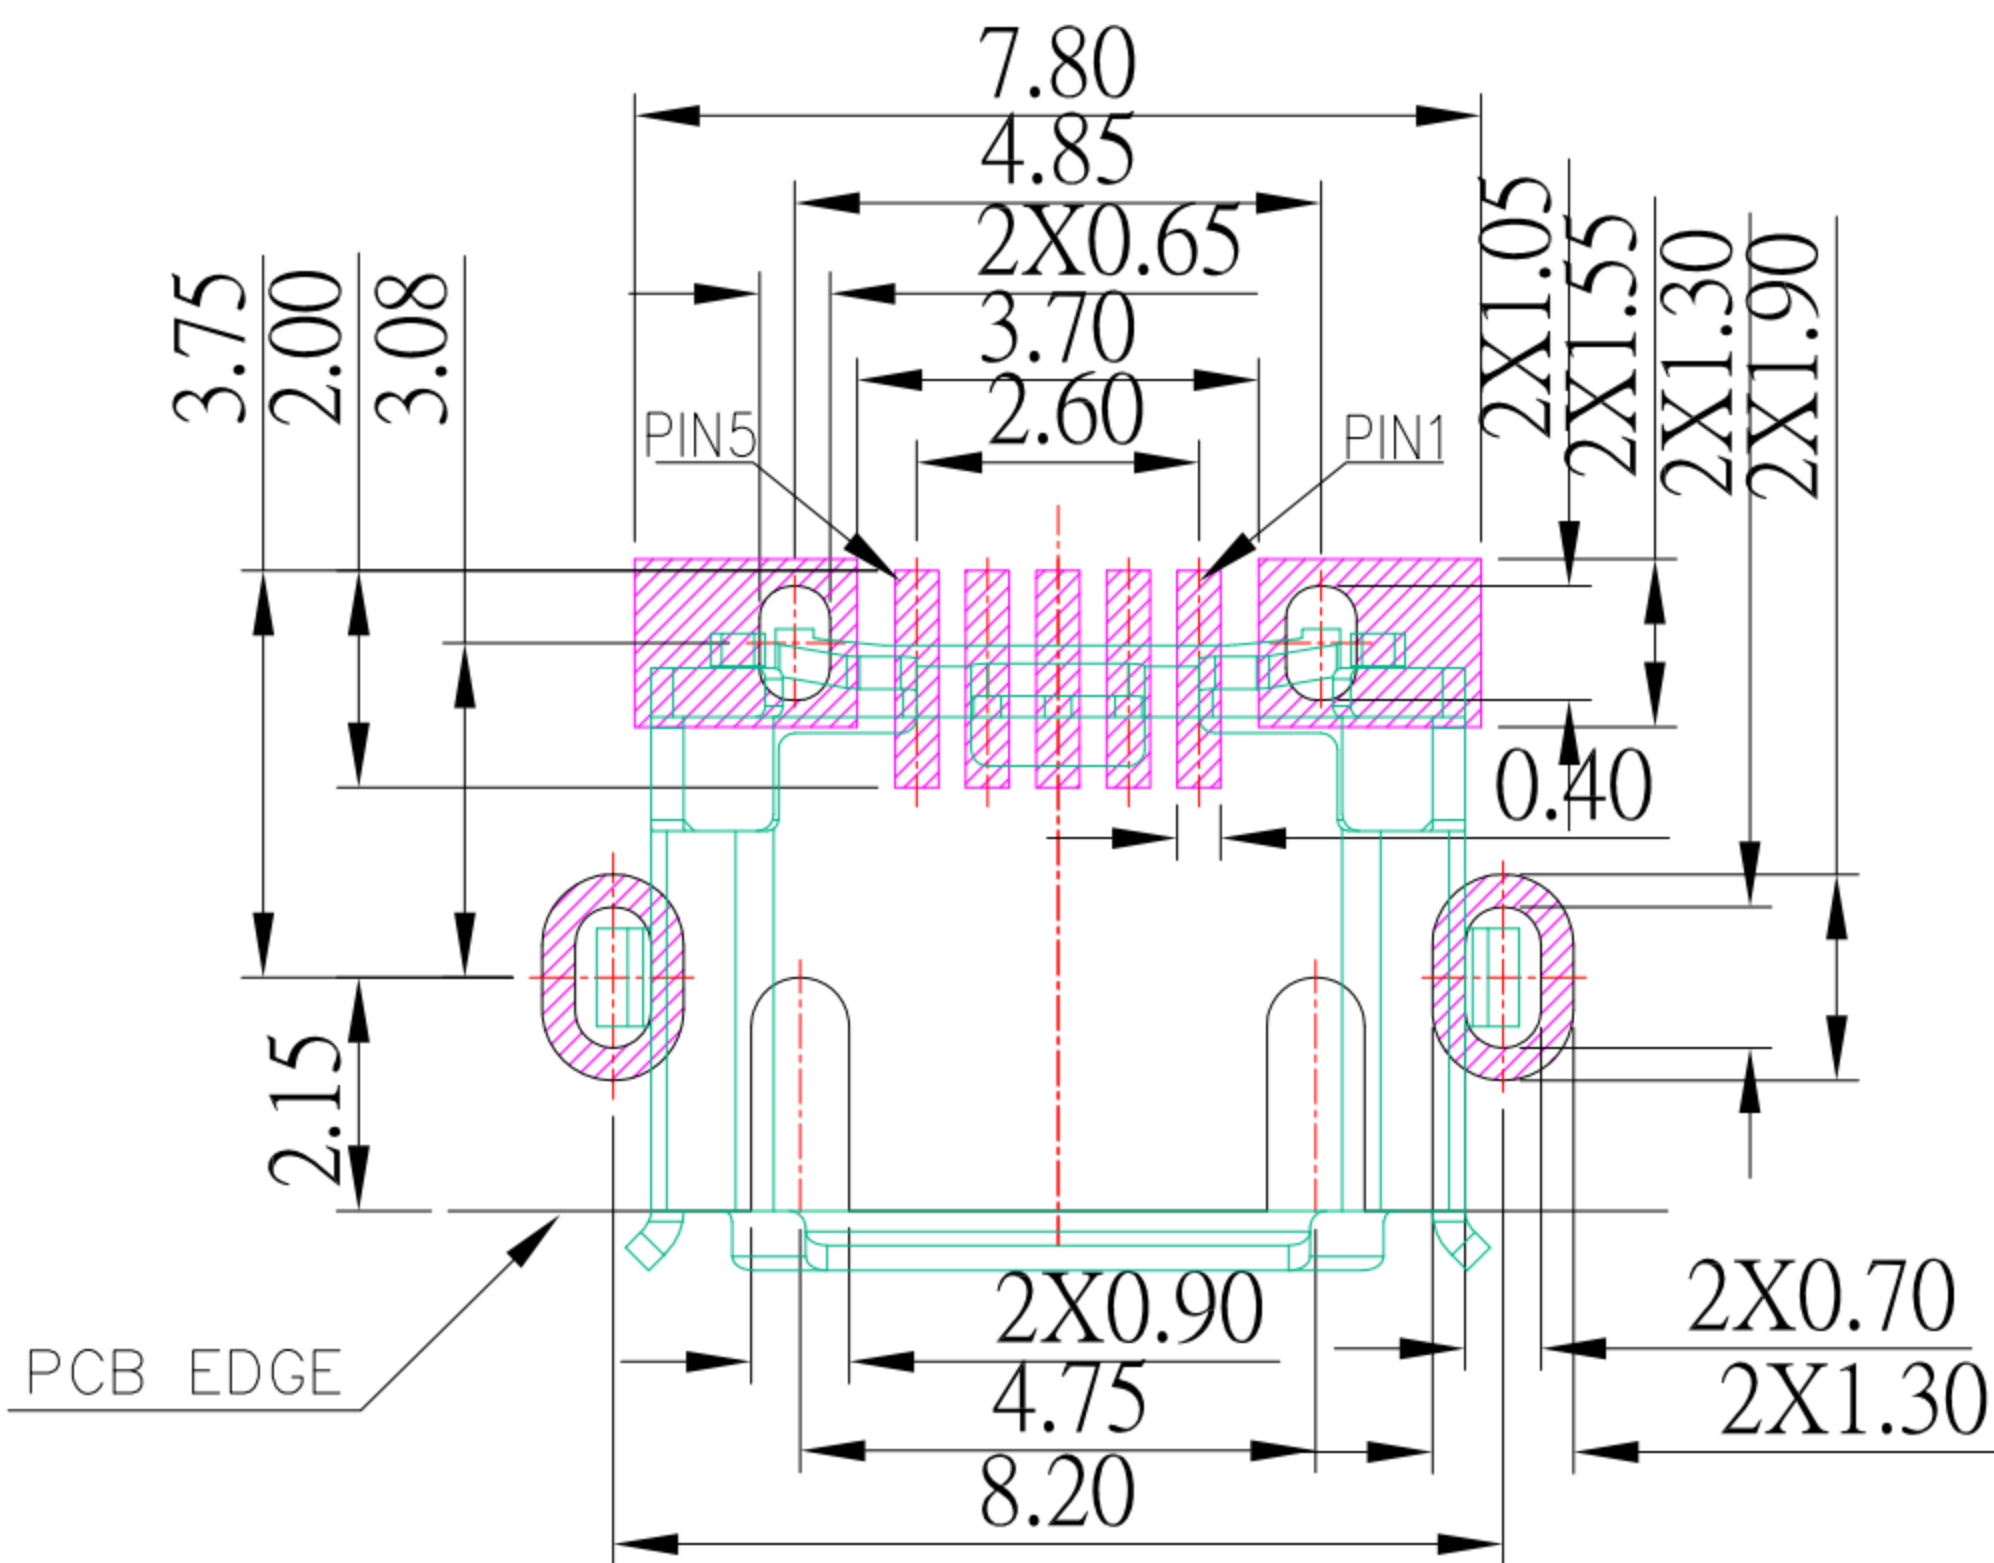
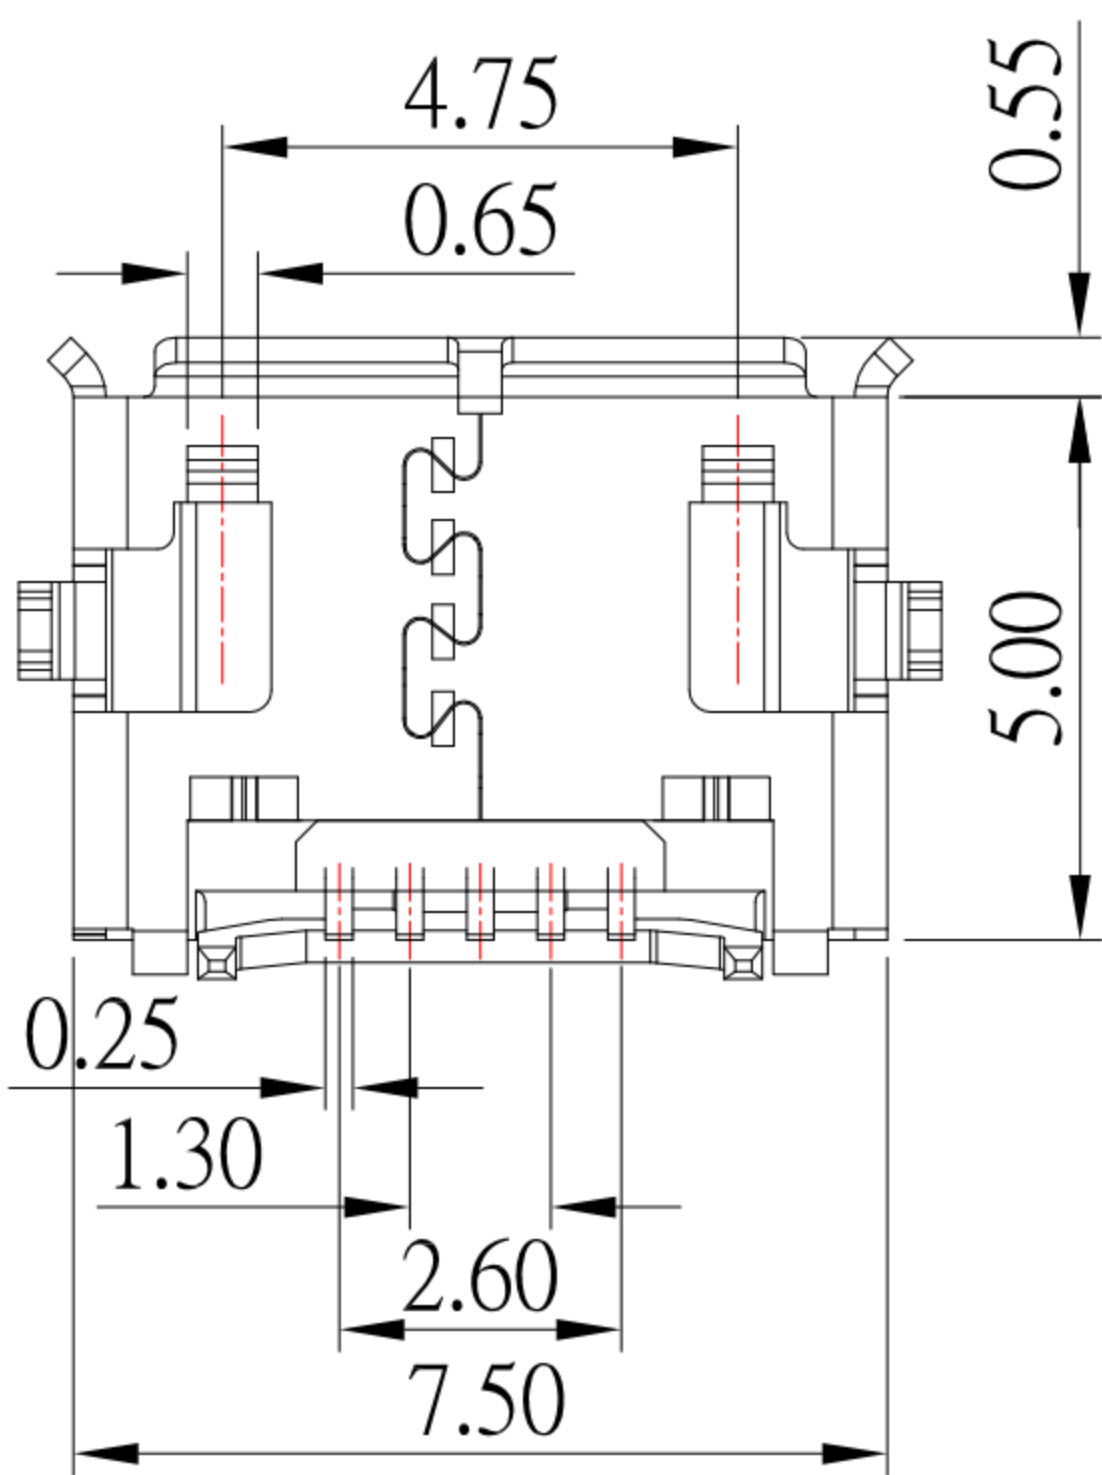
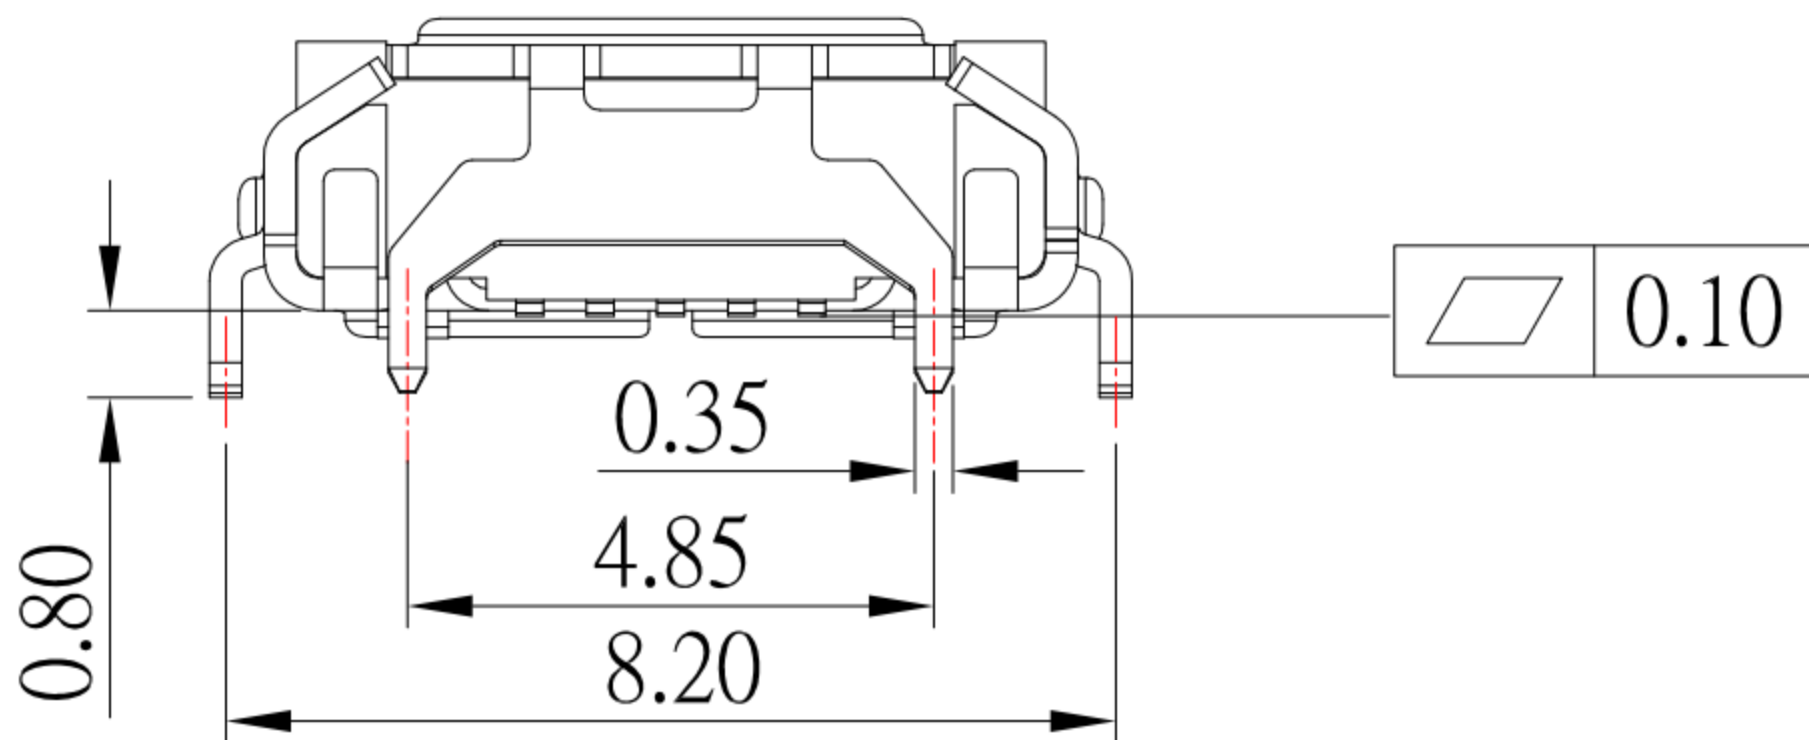
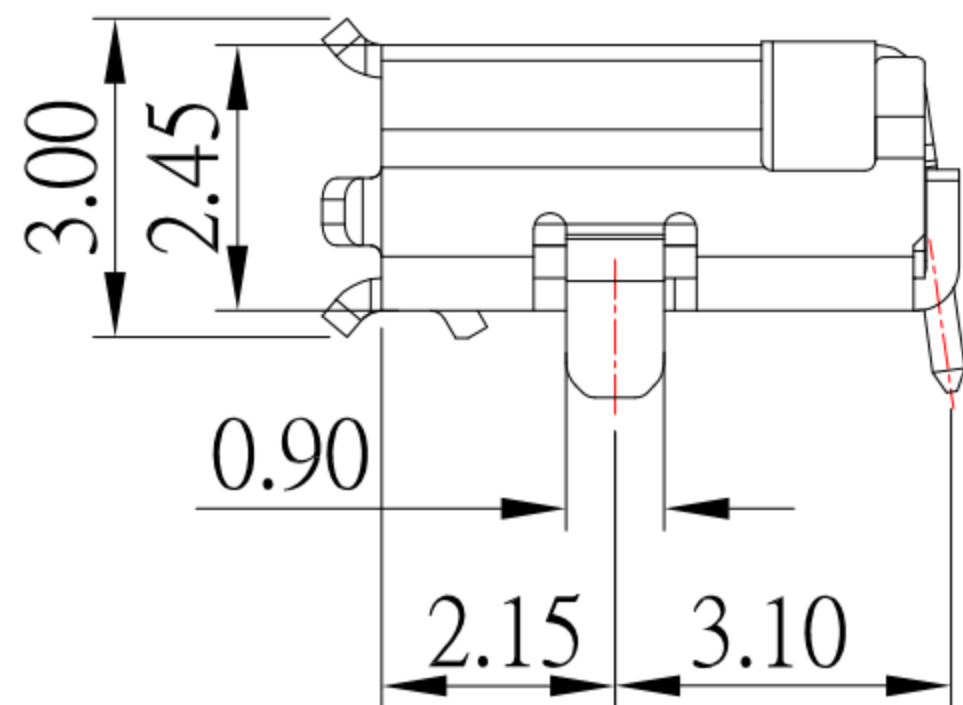


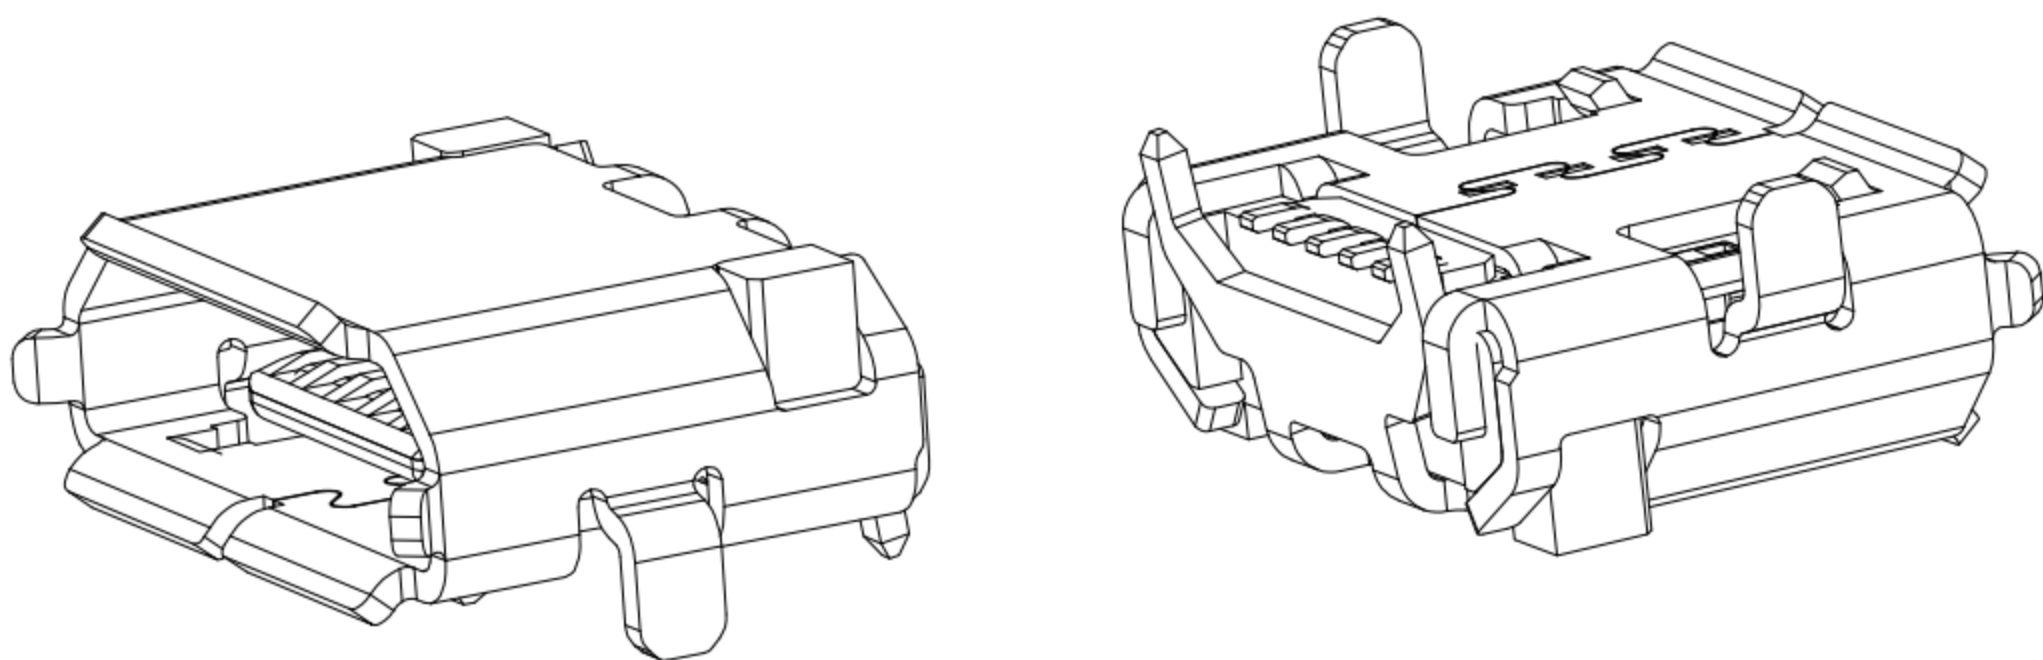

MRUSB-5B-RV6x-S331

SHELL鍍層:

TN
NI

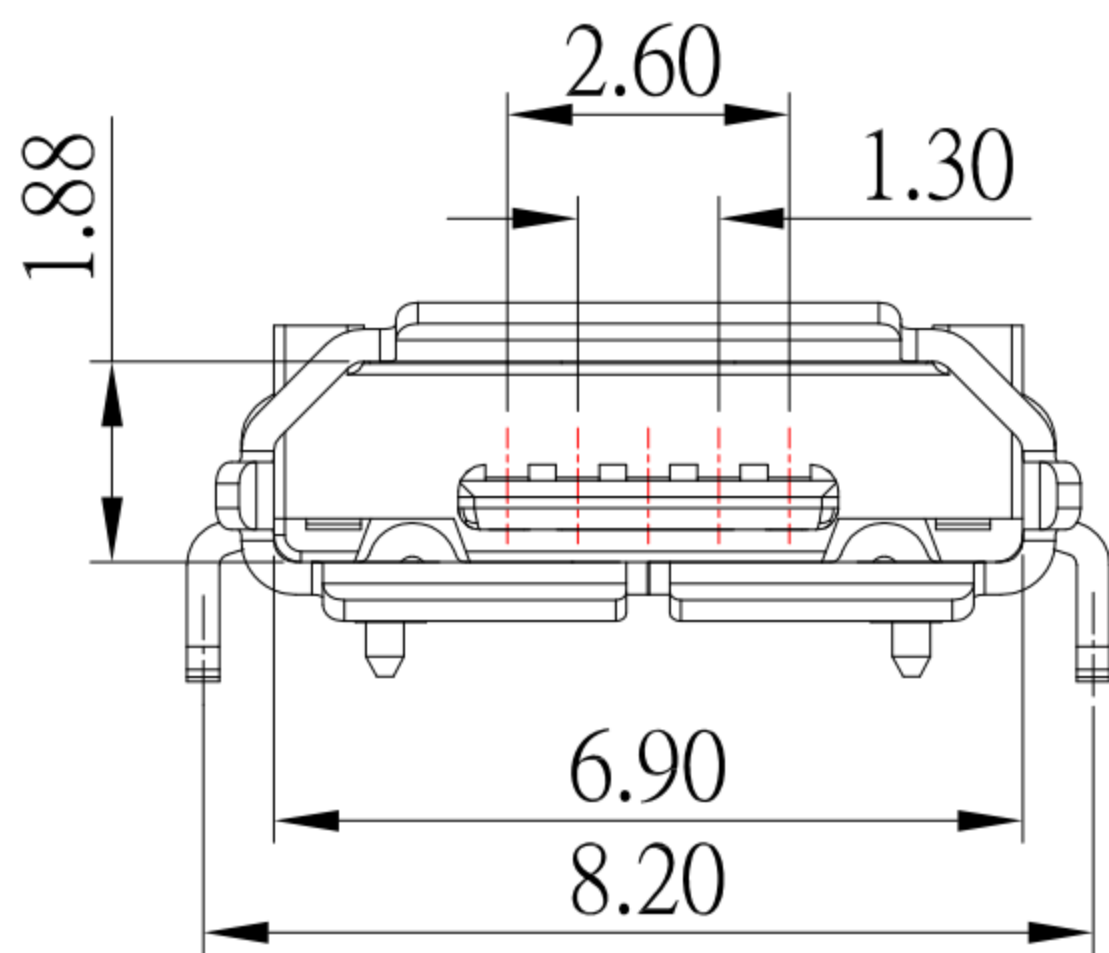

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

- 1.1 HOUSING: LCP,Black
- 1.2 CONTACT: BRASS
- 1.3 SHELL: SUS

Finish:

- 2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls
Nickel under plated overall
- 2.2 Shell: Tin under Plated surface layer


3.SPECIFICATION:

- 3.1 RATING: 30V AC , 0.5 A(2,3,4 pin) ; 1.8 A(1,5 pin)
- 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 250 VAC
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 TEMPERATURE RANGE: -30°C ~ +85°C



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	02/25/19	FINISH		MODLE	MICRO USB 反向 外殼4 腳插板 (PH8.2-4.85mm)
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5B-RV6x-S331
Jacky Chen	02/25/19	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-RV6x-S331
APPROVED BY:	DATE				
Tony Kao	02/25/19				

1	新增SHELL鍍層選項及更新pcb layout	Jack	022519
ITEM NO.	DESCRIPTION	DRAWN	DATE