
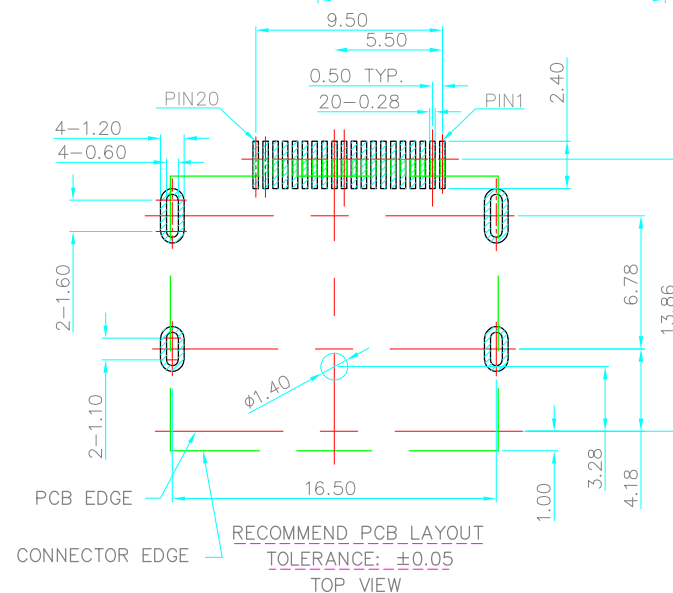
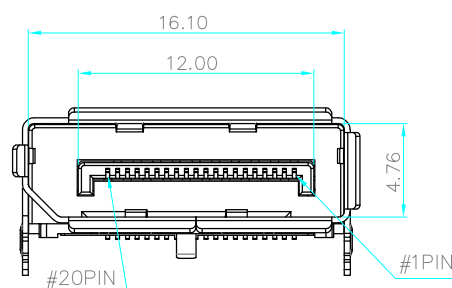
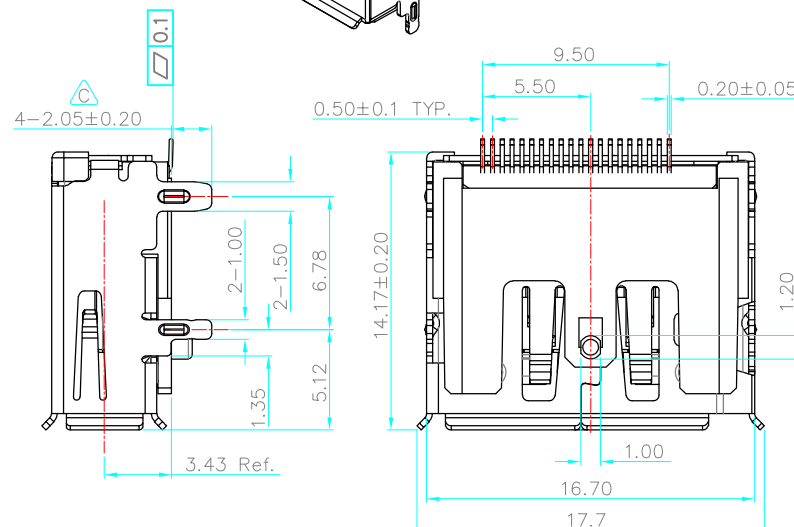
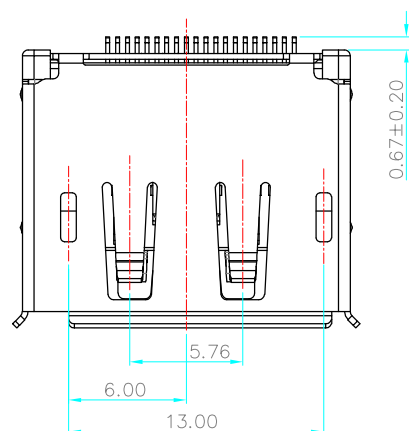



7	8	
REV.	DESCRIPTION	DATE
A	RELEASE	Apr.18, 2019
B	ADD PACKING	Apr.20, 2019
C	MODIFY DIM	May.08, 2019

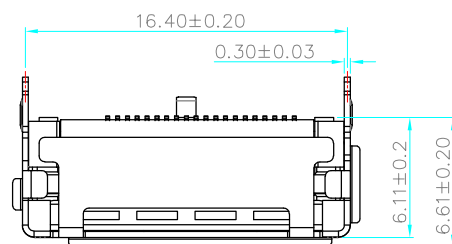


MATERIALS

1. HOUSING: LCP (UL94V-0), BLACK.
2. TERMINAL: COPPER ALLOY,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS.
NICKEL PLATED OVERALL.
3. SHELL: STAINLESS STEEL,
NICKEL PLATED OVERALL.

SPECIFICATION

1. CURRENT RATING: 0.5A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE: 100MΩ MIN.AT 500V DC.
4. CONTACT RESISTANCE: 30mΩ MAX.
5. OPERATING TEMPERATURE: -25°C TO +85°C.
6. DURABILITY: 10000 CYCLES.
7. MATING FORCE: 4.5kgf MAX.
8. UNMATING FORCE: 1.0kgf MIN.

<u>TOLERANCE</u> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
		APP'D <i>Hony</i>	NAME DISPLAY PORT R/A SMT TYPE. FEMALE, WITHOUT LOGO
UNITS : mm		PRODUCT SPEC. —	DRAW NO. XB-DP-CAR100
SCALE NONE	SIZE A4	SHEET 1 OF 2	REV. C

REV.	DESCRIPTION	DATE
A	RELEASE	Apr.18, 2019
B	ADD PACKING	Apr.20, 2019
C	MODIFY DIM	May.08, 2019

TAPE & PACKAGE :

MATERIAL :

1. CARRIER TAPE : PS
2. COVER TAPE: PE
3. REEL : PS

QUANTITY:

1. 350 PCS/REEL
2. 10 REEL/CARTON: 3500PCS


DIMENSION :

REEL SIZE :

DIA=380.0mm, W=32.0mm

CARTON :

L=400mm, W=400mm, H=400mm

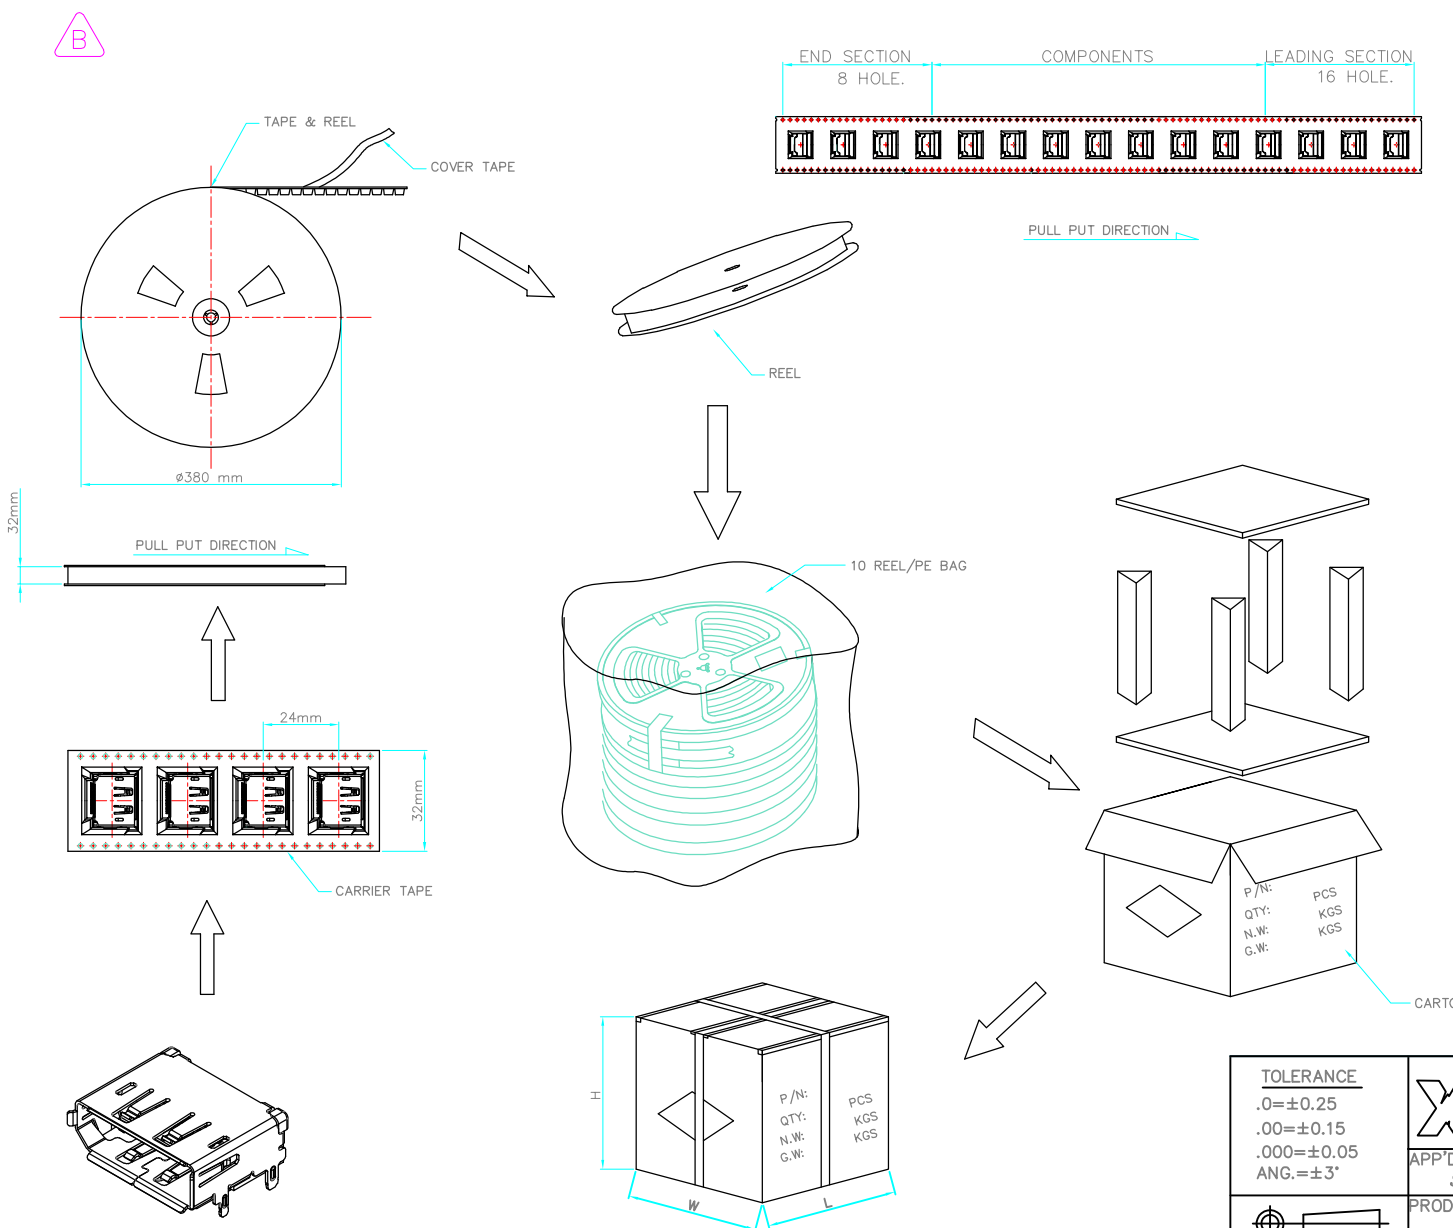

<u>TOLERANCE</u> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
		APP'D <i>Hony</i>	NAME DISPLAY PORT R/A SMT TYPE. FEMALE, WITHOUT LOGO
UNITS : mm		PRODUCT SPEC. —	DRAW NO.
SCALE NONE	SIZE A4	SHEET 2 OF 2	REV. C
XB-DP-CAR100			