
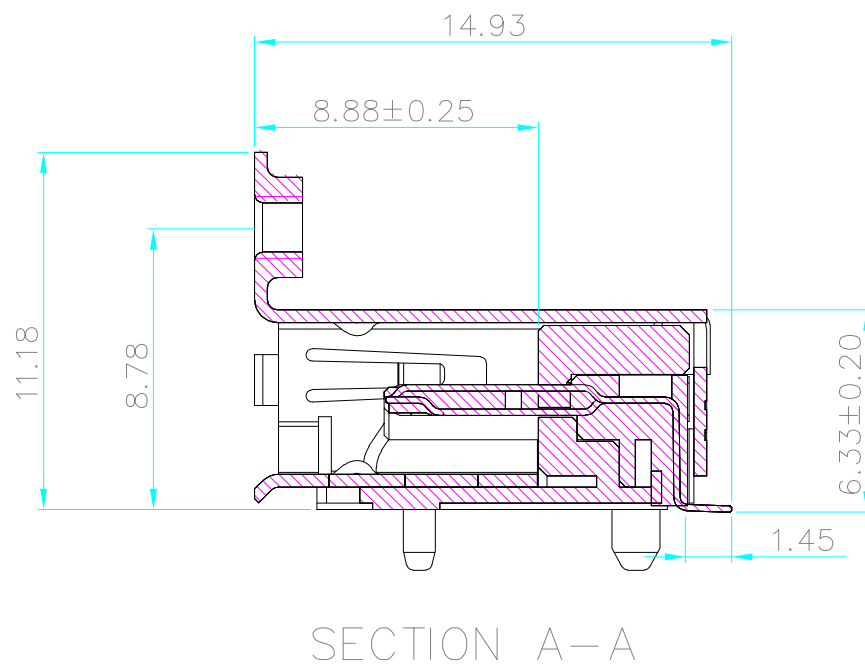
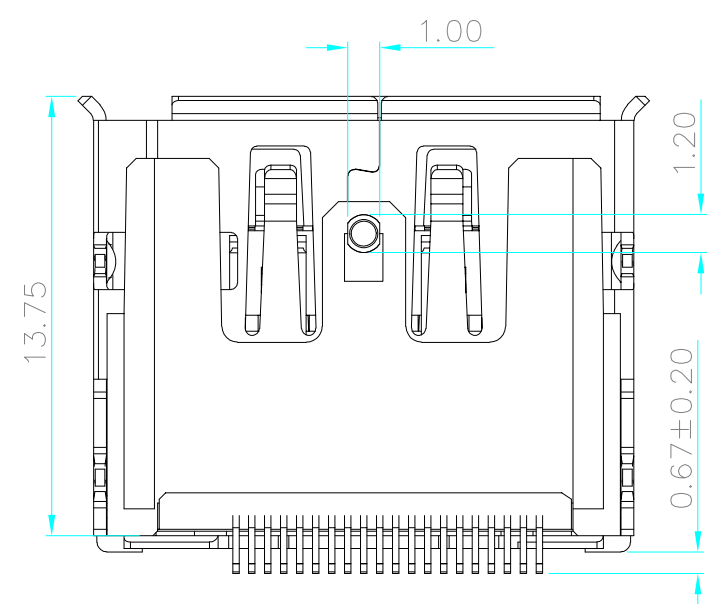
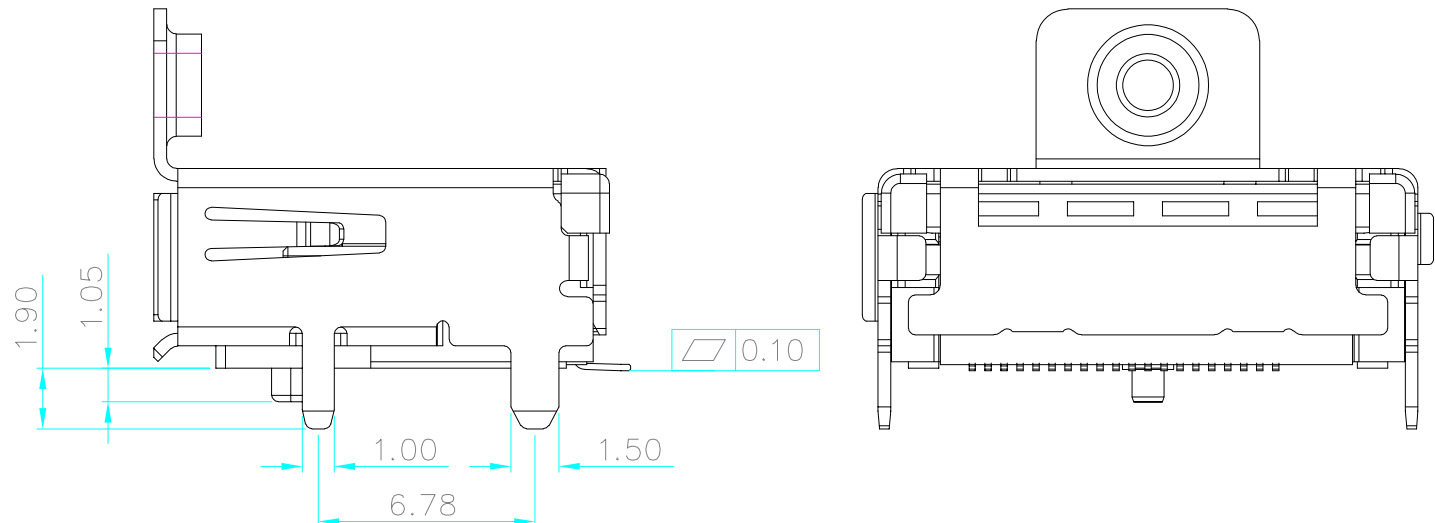
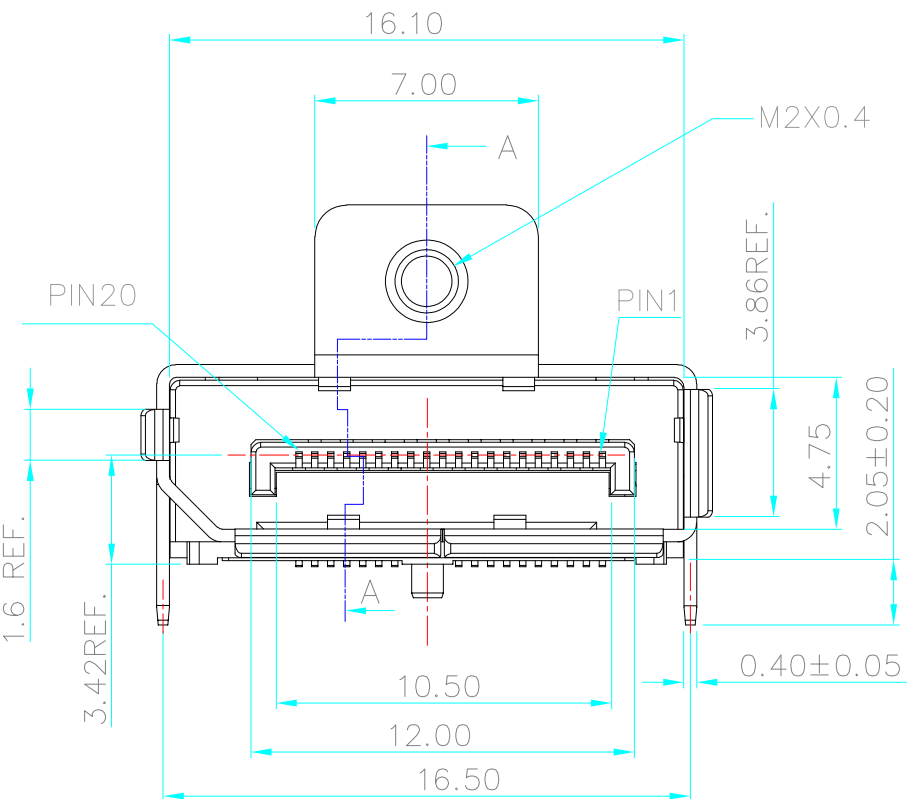
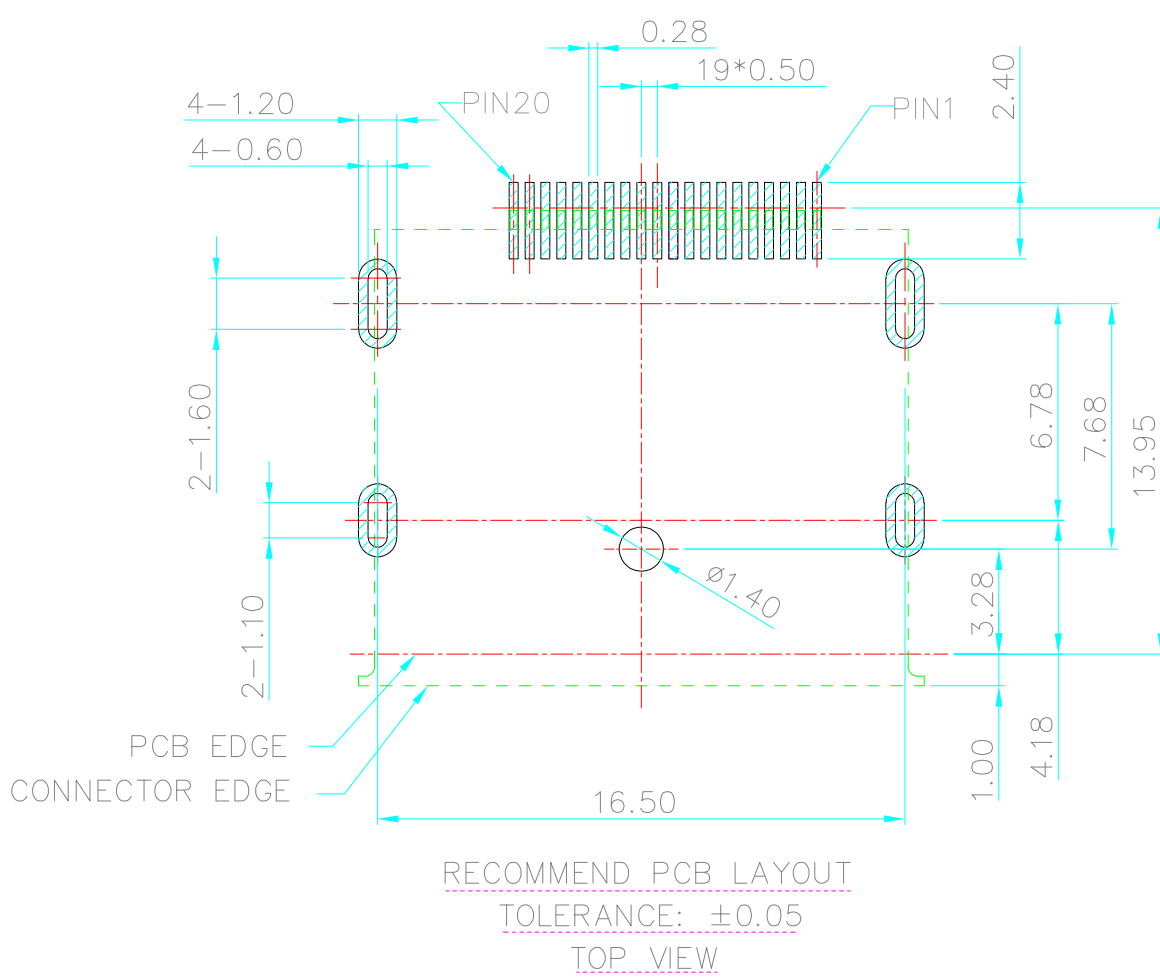


F
E
D
C
B
A

12345678

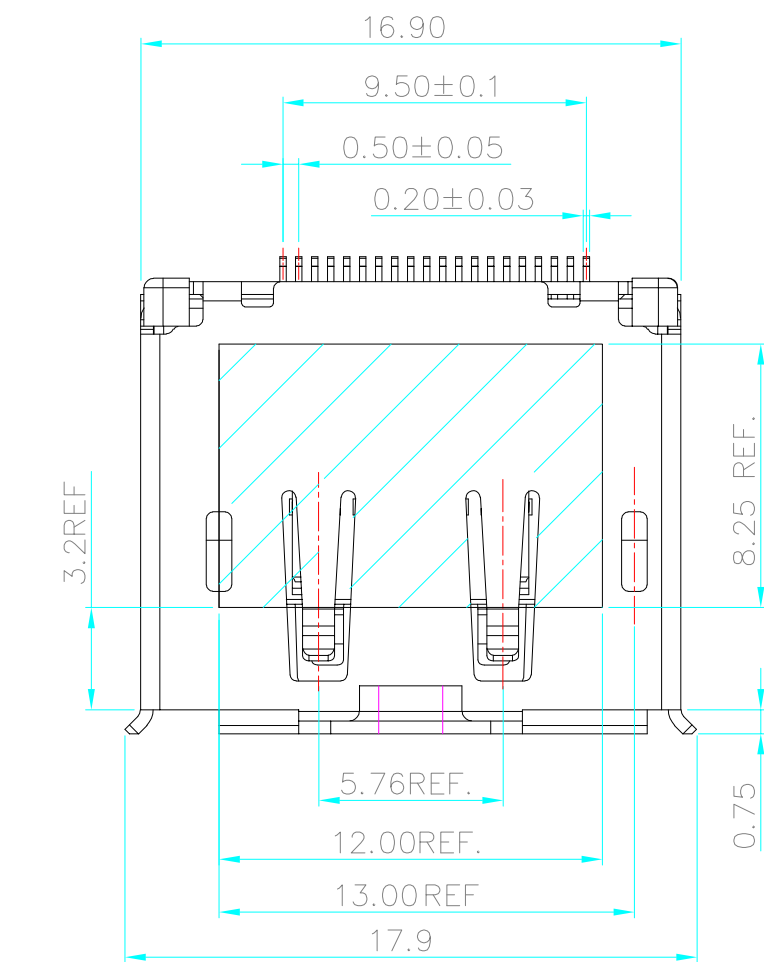

MATERIALS

- 1. HOUSING : LCP (UL94V-0), BLACK.
- 2. TERMINAL : COPPER ALLOY, GOLD PLATING.
UNDER NICKEL PLATING.
- 3. SHELL : COPPER ALLOY, NICKEL PLATING.
- 4. MYLAR : POLYESTER FILM.

SPECIFICATION

- 1. CURRENT RATING : 0.5A. MAX.
- 2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- 3. INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.
- 4. CONTACT RESISTANCE : 30mΩ MAX.
- 5. OPERATING TEMPERATURE : -25°C TO +85°C.
- 6. DURABILITY : 10000 CYCLES.
- 7. MATING FORCE : 4.5kgf MAX.
- 8. UNMATING FORCE : 1.0kgf MIN.

TOLERANCE

.0=±0.25

.00=±0.15

.000=±0.05

ANG.=±3°

UNITS : mm

SCALE NONE

SIZE A4

XG 东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

APP'D

PRODUCT SPEC.

SHEET 1 OF 2

REV. A

NAME

DISPLAYPORT SMT TYPE FEMALE

(SCREW THREAD M2)

DRAW NO.

XB-DP-CAR300

12345678

