



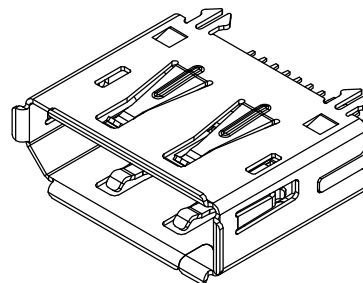

DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/14'18	ming		NEW DWG		A0
11/16'18	ming				A1



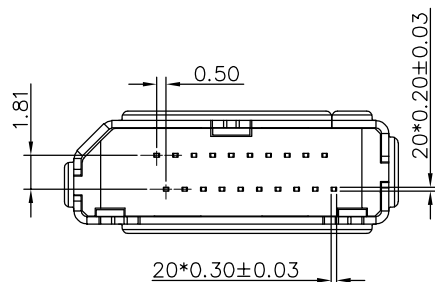


MATERIALS


1. HOUSING&CAP : LCP (UL 94V-0) BLACK.
2. TERMINAL : COPPER ALLOY,
PLATING : GOLD PLATED ON CONTACT AREA, TIN PLATED ON
SOLDER TAILS, NICKEL UNDER PLATED OVER ALL.
3. SHELL : STAINLESS STEEL , T=0.30mm
PLATING : NICKEL PLATED OVERALL.


SPECIFICATION

1. CURRENT RATING : 0.5 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE : 100MΩ MIN.AT 500V DC.
4. CONTACT RESISTANCE : 30mΩ MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 10000 CYCLES.
7. MATING FORCE : 4.5kgf MAX.
8. UNMATING FORCE : 1.0kgf MIN.

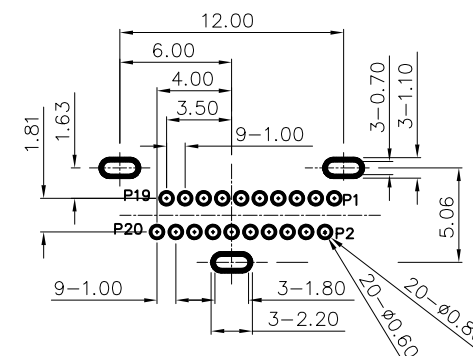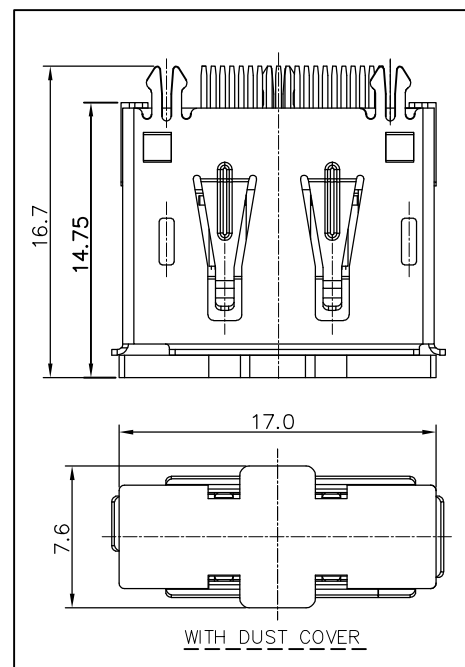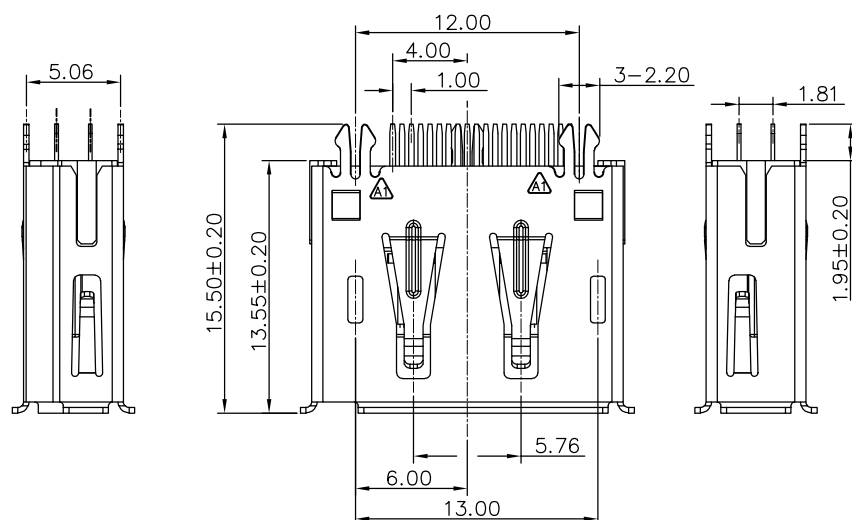

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW

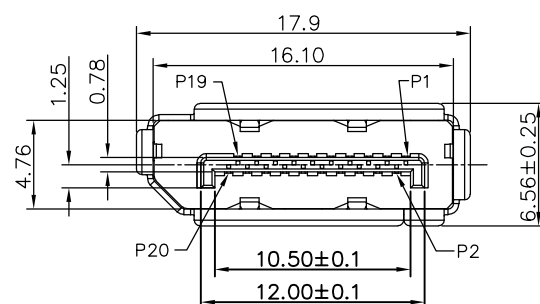

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表				XIB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.						
						TITLE: DP FEMALE A TYPE 直立式 ?品名: H=13.55 PH=1.00				
X.X	±0.25	X.X*	±3.00	APPD:		PRODUCT NO: XB-DP-CAR800				
X.XX	±0.20	X.XX*	±1.00	CHECK:		DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.10	X.XXX*	±0.50	DRAW:		2018.03.14	1:1	mm		1/