

F

E

D

C

B

A

1

2

3

4

5

6

7

8

REV.	DESCRIPTION	DATE
A	RELEASE	JAN. 29, 2019
B	DRAW,MODIFY	Mar. 20, 2019

MATERIALS

- HOUSING : L.C.P. (UL 94V-0), BLACK.
- TERMINAL : C2680 (t=0.20mm),
GOLD 5u" PLATED ON CONTACT AREA,
TIN 80u" MIN. PLATED ON SOLDER TAIL,
UNDER NICKEL 50u" MIN. PLATED OVER ALL.
- SHELL : C2680 (t=0.50mm),
NICKEL 50u" MIN. PLATING.

SPECIFICATION

- CURRENT RATING : 0.5 AMP.
- RATING VOLTAGE : 40V AC
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE
- INSULATION RESISTANCE : 100MΩ MIN.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -20°C TO +85°C.
- MATING FORCE : 4.5 Kg MAX.
- UNMATING FORCE : 1.0 Kg MIN.
- DURABILITY : 10,000 CYCLES.

CONNECTOR EDGE

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE
.0= ± 0.20
.00= ± 0.15
.000=
ANG.= $\pm 3^\circ$

UNITS : mm

SCALE NONE SIZE A4 SHEET 1 OF 2 REV. B

APP'D NAME HDMI CONNECTOR
A TYPE, DIP TYPE
W/FLANGE


PRODUCT SPEC.
—

DRAW NO. XB-R369FA22


XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

1. HOUSING : L.C.P. (UL 94V-0), BLACK.
2. TERMINAL : C2680 (t=0.20mm),
GOLD 5u" PLATED ON CONTACT AREA,
TIN 80u" MIN. PLATED ON SOLDER TAIL,
UNDER NICKEL 50u" MIN. PLATED OVER ALL.
3. SHELL : C2680 (t=0.50mm),
NICKEL 50u" MIN. PLATING.


1. CURRENT RATING : 0.5 AMP.
2. RATING VOLTAGE : 40V AC
3. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE
4. INSULATION RESISTANCE : 100MΩ MIN.
5. CONTACT RESISTANCE : 30m OHMS MAX.
6. OPERATING TEMPERATURE : -20°C TO +85°C.
7. MATING FORCE : 4.5 Kg MAX.
8. UNMATING FORCE : 1.0 Kg MIN.
9. DURABILITY : 10,000 CYCLES.

TOLERANCE $.0=\pm 0.20$  $.00=\pm 0.15$  $.000=$ $ANG.=\pm 3^{\circ}$		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
 UNITS : mm		APP'D	NAME
		PRODUCT SPEC. _____	HDMI CONNECTOR A TYPE, DIP TYPE W/FLANGE
			DRAW NO. XB-R369FA22
SCALE NONE	SIZE A4	SHEET 1 OF 2	REV. B



REV.	DESCRIPTION	DATE
A	RELEASE	JAN. 29, 2019
B	DRAW,MODIFY	Mar. 20, 2019




PRODUCT

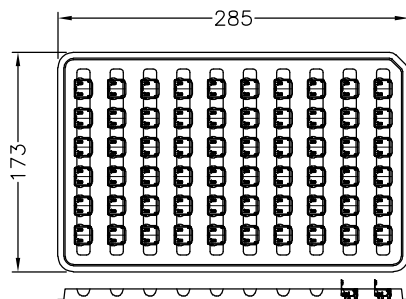


TRAY
60 PCS

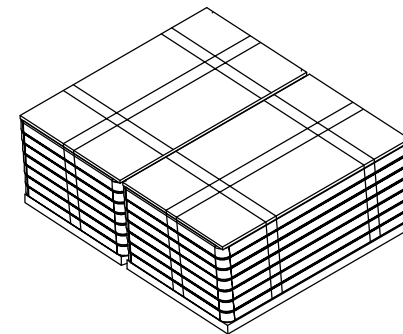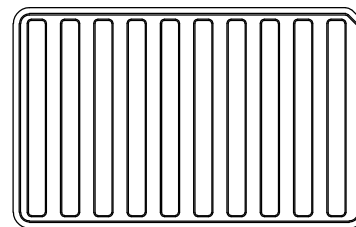

2 STACKS/13 TRAY
780 PCS

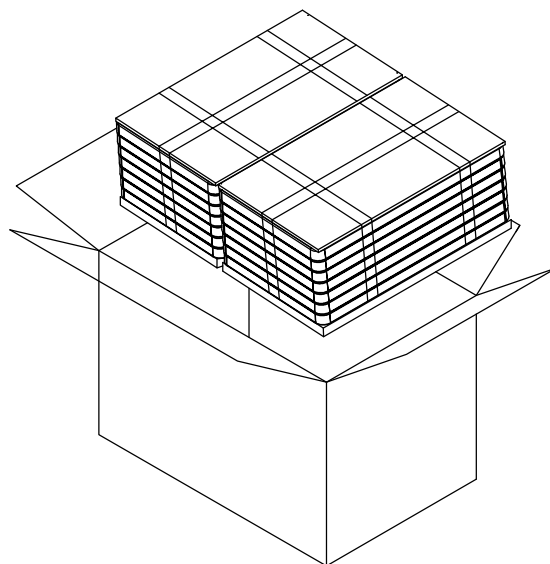

2 STACKS=60 PCS * 13 TRAY
1560 PCS

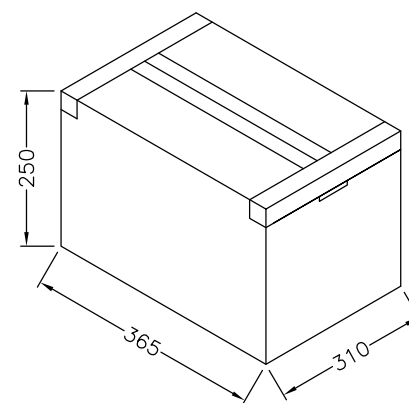

CARTON
1560 PCS

<u>TOLERANCE</u> . 0.= . 00.= . 000.= ANG.=±3'		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
 UNITS : mm		APP'D PRODUCT SPEC. _____	NAME HDMI CONNECTOR A TYPE, DIP TYPE W/FLANGE
		DRAW NO. XB-R369FA22	
SCALE NONE	SIZE A4	SHEET 2 OF 2	REV. B