
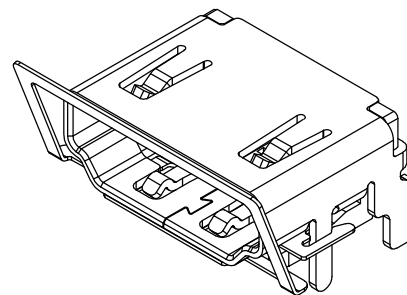
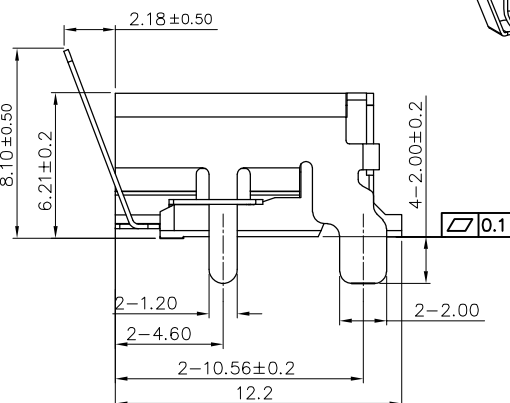


REV.	DESCRIPTION	DATE
A	RELEASE	May.06, 2019


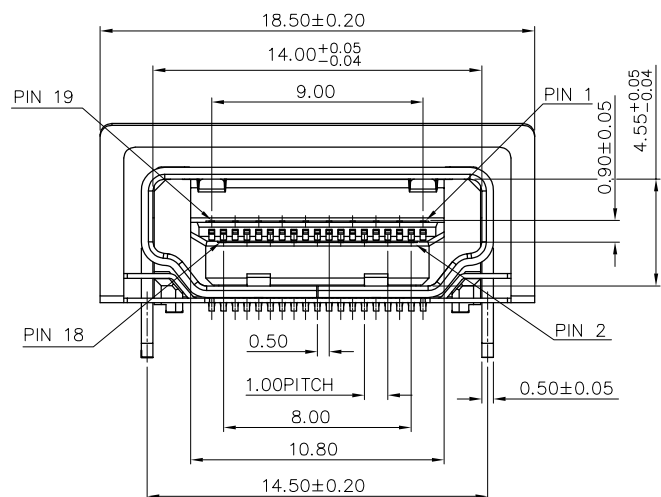


MATERIALS

1. HOUSING: THERMOPLASTIC (UL 94V-0),BLACK
2. TERMINAL: COPPER ALLOY,
PLATING: GOLD PLATED OVER NICKEL ON CONTACT AREA AND TIN PLATED OVER NICKEL ON SOLDER TAILS.
3. SHELL: COPPER ALLOY.
PLATING: NICKEL PLATED OVERALL.
4. SPRING: STAINLESS STEEL

SPECIFICATION


1. CURRENT RATING: 0.5A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE: 100MΩ MIN AT 500V DC.
4. OPERATING TEMPERATURE: -25°C TO +85°C.
5. DURABILITY: 10000 CYCLES.

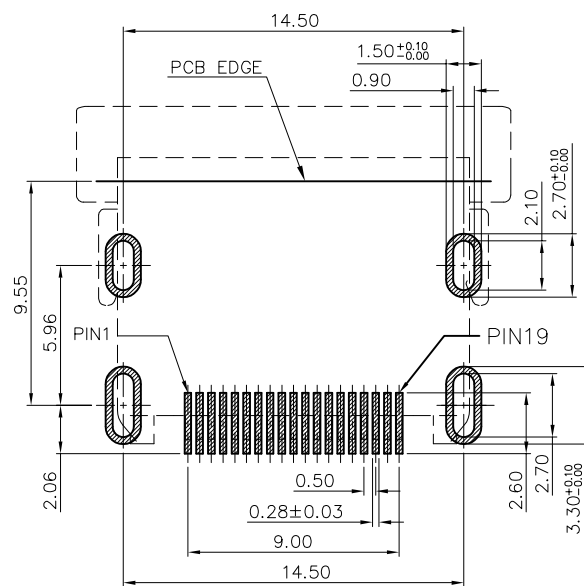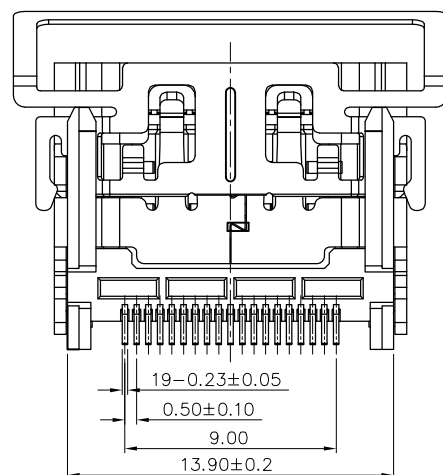





RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		东 莞 市 溪 榜 电 子 有 限 公 司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
APP'D 		NAME HDMI A TYPE FEMALE SMT TYPE W/SPRING	
PRODUCT SPEC. _____		DRAW NO. XB-R369FA23	
UNITS : mm 	SCALE NONE	SIZE A7	SHEET 1 OF 2
REV. A			

REV.	DESCRIPTION	DATE
A	RELEASE	May.06, 2019

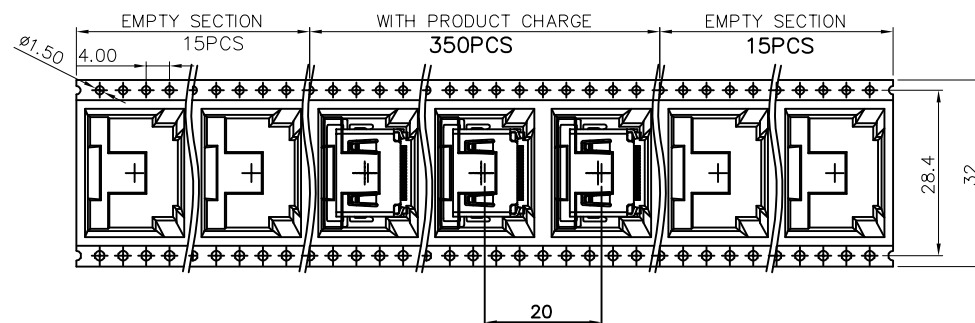

PULL PUT DIRECTION →

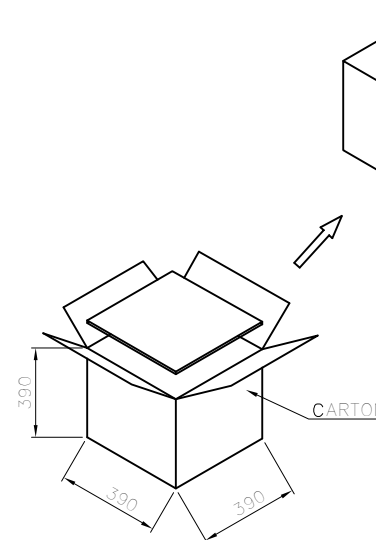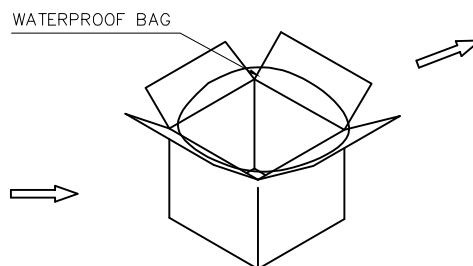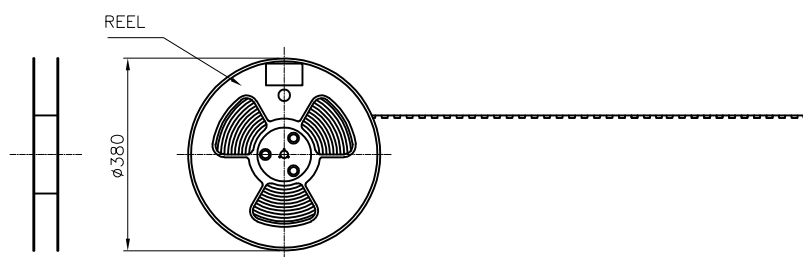

TAPE & PACKAGE :

MATERIAL :

1. CARRIER TAPE : PS
2. COVER TAPE: PE
3. REEL : PS

QUANTITY:

1. 350 PCS/REEL
2. 3500 PCS/CARTON

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
APP'D <i>Hony</i> PRODUCT SPEC.		NAME HDMI A TYPE FEMALE SMT TYPE W/SPRING	
UNITS : mm SCALE NONE SIZE A7		DRAW NO. XB-R369FA23	
SHEET 2 OF 2		REV. A	